
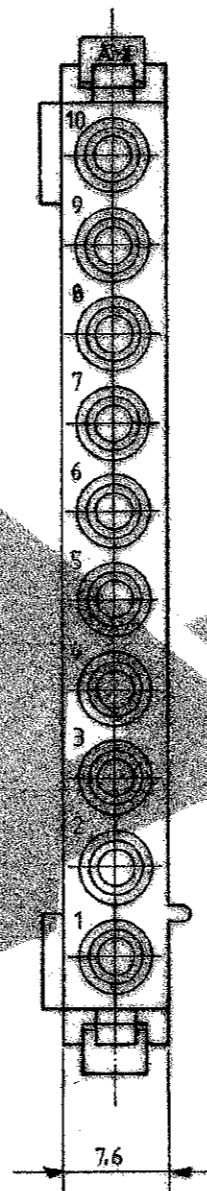


4 COLOR OF HOUSINGS MAY RANGE FROM CLEAR TO GREEN OR YELLOW DUE TO HYGROSCOPIC NATURE OF RESIN. HOWEVER IT DOESN'T AFFECT THE FORM, FIT AND FUNCTION OF THE PRODUCT.

5 CSA CERTIFICATION LOGO TO BE IN ONE OR BOTH LOCATIONS, LOCATED APPROXIMATELY AS SHOWN

Index	Änderung	Tag	Name
F2	REVISED PER ECO-11-005139	28MAR11	HMR
G	REVISED PER ECR-13-019169	04SEP14	AV / DZ
G1	REV. ECO 17.011267	05SEP17	HC / KR

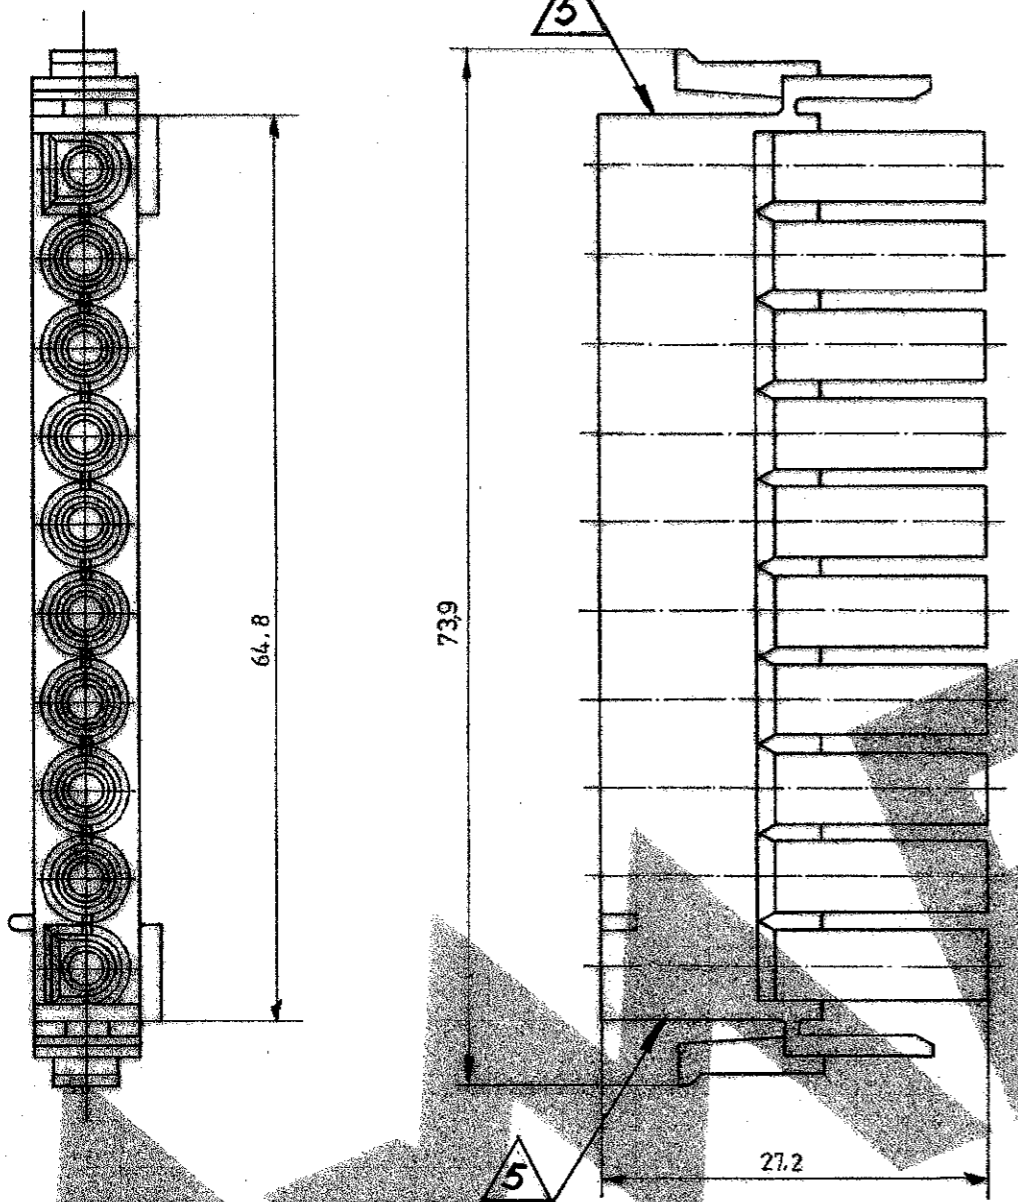

1 PHOSPHOR UND HALOGEN FREI  
PHOSPHOR AND HALOGEN FREE

2 SCHÜTTGUT IN BEUTEL UND VERSANDKARTON  
PN 973 057-2  
BULK PACKAGING IN PLASTIC BAG AND  
CORRUGATED SHIPPING BOX PN 973 057-2

3 GWT 750° (WITHOUT FLAME) ACC. IEC  
60335-1 EDITION 06/2001  
GLÜHDRAHT PRÜFUNG 750° (OHNE FLAMME)  
NACH IEC 60335-1 AUSGABE 06/2001

Anderungen, die dem technischen Fortschritt dienen, behalten wir uns vor.

926 302-5	PA 6 UL94 V-0 natur	TE Connectivity Bezeichnung <b>UNIVERSAL MATE-N-LOK</b> <b>10-poliges Steckergehäuse</b>				
926 302-4	PA 6.6 UL94 V-0 weiß					
926 302-3	PA 6.6 UL94 V-0 NATUR					
926 302-2	PA 6.6 UL94 V-0 schwarz					
926 302-1	PA 66 UL94 V-2 NATURAL					
Bestell-Nr.	Werkstoff	Oberfläche Farbe	Nicht tolerierte Maße ± 0,2 mm ± 0	Format <b>B</b>	Zeichnungs-Nr. <b>926 302</b>	Blatt-Nr. <b>G1</b>
Gez. 1.7.80 Hinc	Gepr. 28.8.1980 R. Blunck	Gepr. 29.8.80	Maßstab 2:1			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)