
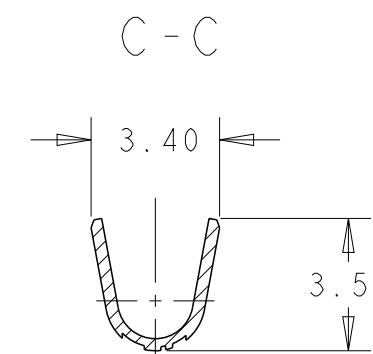
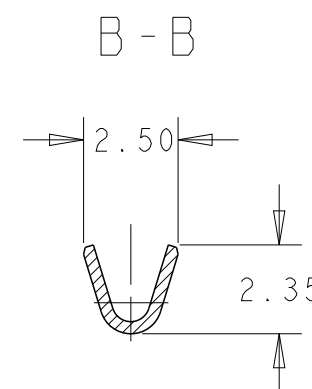
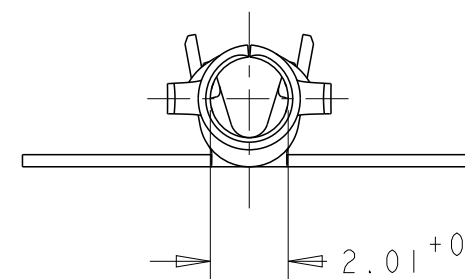


LOC
AL

DIST
2

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	J6	REVISED PER ECR-18-010208	23JUL2018	BDA	SF

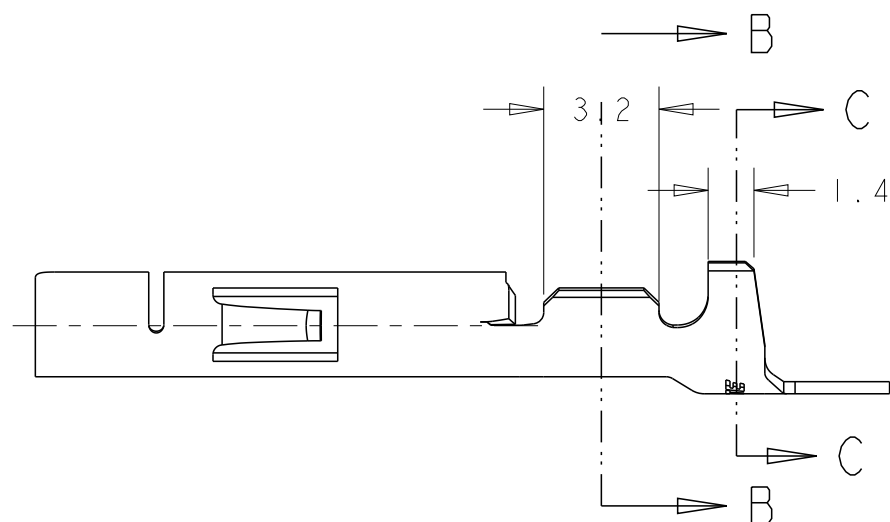


NOTES:

Bemerkungen:

- 1 2-6µm Sn OVER Ni IN CRIMP-AREA
2-6µm Sn über Ni in der Crimpzone
- 2 0.8µm Au OVER Ni IN CONTACT-AREA
0.8µm Au über Ni in der Kontaktzone
- 3 SUITABLE FOR Ø1.0-2.5mm
Für Isolations Ø1.0-2.5mm geeignet
- 4 0.8µm Au OVER 1.3µm Ni ON INSIDE OF WIRE BARREL AND CONTACT AREA
0.8µm Au über 1.3µm Ni in der Drahtcrimp und Kontaktzonen, sonst 1.3µm Ni

SUPERSEDED BY 350851-7	926895-7	926884-7	BRASS	1 2
SUPERSEDED BY 350851-7	926895-6	926884-6	PHOS BRONZE	1 2
	926895-3	926884-3	PHOS BRONZE	PRE-TIN
OBSOLETE	926895-2	926884-2	BRASS	4
	926895-1	926884-1	BRASS	PRE-TIN
	LOOSE PIECE	PART NO.	MATERIAL	FINISH

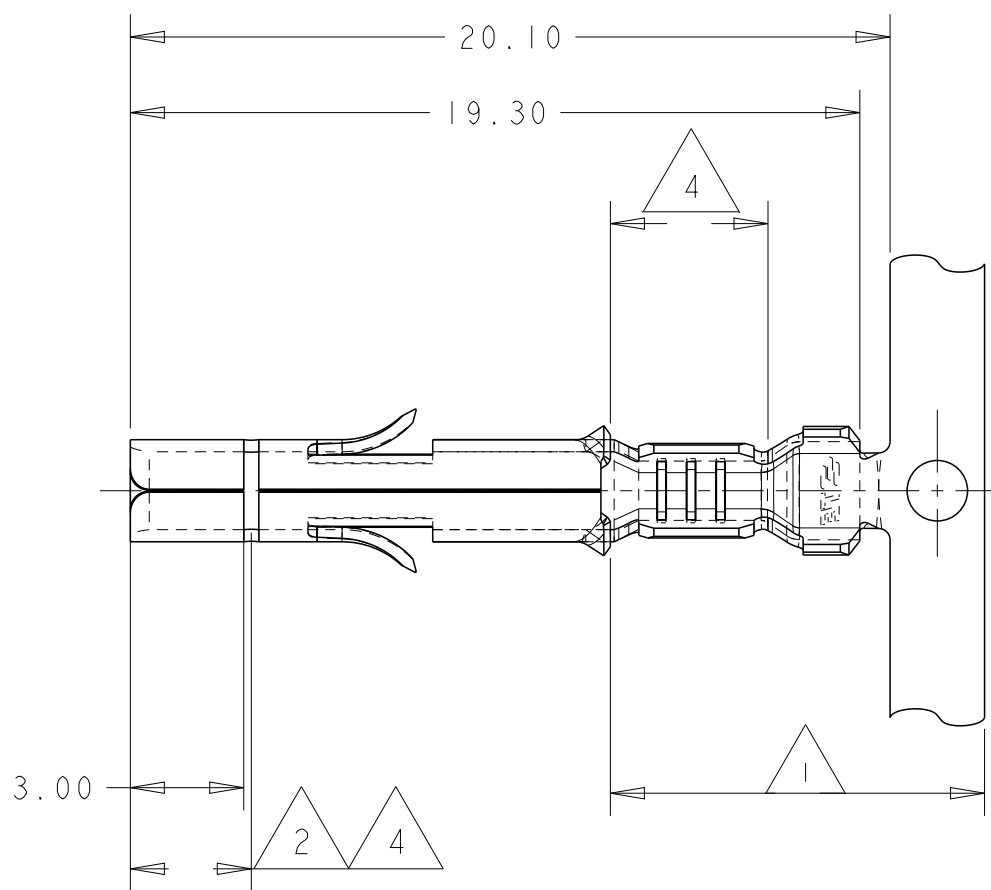

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. Skoda	07NOV2005	STE TE Connectivity	
DIMENSIONS: mm		CHK R. Vlcek	-		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	-	NAME UNIVERSAL MNL SOCKET 0.2-0.8 mm ² WIRE RANGE	
0 PLC	±0.2	PRODUCT SPEC	108-1031	SIZE	CAGE CODE
1 PLC	±0.2	APPLICATION SPEC	114-18011	DRAWING NO	RESTRICTED TO
2 PLC	±0.2	WEIGHT	-	A300779	©-926884
3 PLC	±	CUSTOMER DRAWING		SCALE	SHEET
4 PLC	±			5:1	1 OF 1
ANGLES	±1°				REV
FINISH	SEE TABLE				J6

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)