


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE PER ECO-16-012814	08-30-2016	HD	-

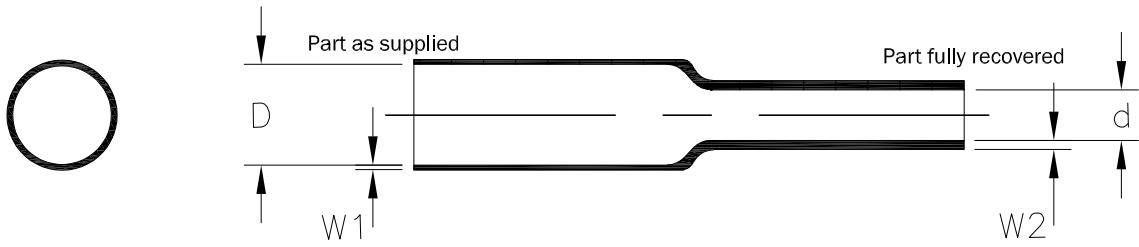

TUBING DIMENSIONS METRIC

Size	As Supplied (mm)		As Recovered (mm)	
	Inside Diameter	Wall Thickness	Inside Diameter	Wall Thickness
	D	W1 nominal	d maximum	W2 minimum
0.8/0.4	1.2 ± 0.25	0.1	0.4	0.25
1.0/0.5	1.4 ± 0.25	0.1	0.5	0.25
1.5/0.75	1.9 ± 0.25	0.1	0.75	0.25
2.0/1.0	2.3 ± 0.25	0.1	1.0	0.26
2.5/1.25	2.8 ± 0.25	0.15	1.25	0.28
3.0/1.5	3.3 ± 0.25	0.15	1.5	0.28
3.5/1.75	3.8 ± 0.25	0.15	1.75	0.28
4.0/2.0	4.4 ± 0.25	0.15	2.0	0.28
6.0/3.0	6.5 ± 0.4	0.15	3.0	0.33
9.0/4.5	9.5 ± 0.4	0.15	4.5	0.33
12.0/6.0	12.9 ± 0.5	0.15	6.0	0.33
18.0/9.0	19.2 ± 0.6	0.2	9.0	0.46
25.0/12.5	26.4 ± 1.0	0.2	12.5	0.46

MATERIAL: SWFR X4 is a 125°C, 300 volt, VW-1 rated, UL recognized tubing meeting the requirements of UL 224. It is fabricated from Zerohal flame-retarded crosslinked modified flexible polyolefin.

COLOR: Black

RELEASED FOR PUBLICATION APR , 2016.

ALL RIGHTS RESERVED.

© COPYRIGHT 2016 TE Connectivity

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2016 TE Connectivity

DIMENSIONS: mm	DWN HD	20APR2016	MATERIAL -	FINISH -
	CHK -	-		
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD -	-		
	0 PLC ± -	PRODUCT SPEC -	NAME SWFR X4 SINGLE WALL HEAT SHRINKABLE TUBING	
1 PLC ± -	APPLICATION SPEC -	SIZE	CAGE CODE	DRAWING NO
2 PLC ± -		A4	06090	C-SWFR_X4
3 PLC ± -	WEIGHT	0	SCALE NTS	
4 PLC ± -	CUSTOMER DRAWING		SHEET 1 OF 1	REV A
ANGLES ± -				

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)