



The product described in this document has not been fully tested to ensure conformance to the requirements outlined below. Therefore, TE Connectivity (TE) makes no representation or warranty, express or implied, that the product will comply with these requirements. Further, TE may change these requirements based on the results of additional testing and evaluation. Contact TE Engineering for further details.

### Fine Magnet Wire Open Barrel Pigtail Splice Terminal

#### 1. SCOPE

##### 1.1. Content

This specification covers performance, tests and quality requirements for the Fine Magnet wire Open Barrel Pigtail Splice Terminal designed to splice unstripped aluminum or copper magnet wires together with stranded lead wire within a combined total range of 400 to 1500 CMA.

##### 1.2. Qualification

When tests are performed on the subject product line, procedures specified in Figure 1 shall be used. All inspections shall be performed using the applicable inspection plan and product drawing.

##### 1.3. Qualification Test Results

Successful qualification testing on the subject product line has not been completed. The Qualification Test Report number will be issued upon successful qualification testing.

#### 2. APPLICABLE DOCUMENTS AND FORMS

The following documents and forms constitute a part of this specification to the extent specified herein. Unless otherwise indicated, the latest edition of the document applies. In the event of conflict between the requirements of this specification and the product drawing, the product drawing shall take precedence. In the event of conflict between the requirements of this specification and the referenced documents, this specification shall take precedence.

##### 2.1. TE Documents

- [114-64001](#): Application Specification
- [501-106251](#): Qualification Test Report

##### 2.2. Industry Documents

- EIA-364: Electrical Connector/Socket Test Procedures Including Environmental Classifications

##### 2.3. Reference Document

- [109-197](#): Test Specification (TE Test Specification vs EIA and IEC Test Methods)

#### 3. REQUIREMENTS

##### 3.1. Design and Construction

Product shall be of the design, construction, materials and physical dimensions specified on the applicable product drawing.

##### 3.2. Materials

Materials used in the construction of this product shall be as specified on the applicable product drawing.

##### 3.3. Ratings

Voltage	Current	Temperature
According to applied winding	According to applied wire size	-65° to +150°C

### 3.4. Test Requirements and Procedures Summary

Unless otherwise specified, all tests shall be performed at ambient environmental conditions.

TEST DESCRIPTION	REQUIREMENT	PROCEDURE
Initial examination of product	Meets requirements of product drawing.	EIA-364-18. Visual and dimensional (C of C) inspection per product drawing.
Final examination of product	Meets visual requirements.	EIA-364-18. Visual inspection.
<b>ELECTRICAL</b>		
Low level contact resistance	See Figure 4	EIA-364-23. Subject specimens to 100 mA max. and 20 mV max. open circuit voltage. See Figure 3.
Temperature rise vs. current	30°C maximum temperature rise at specified current	EIA-364-70, Method 1. Stabilize at a single current level until 3 readings at 5 minute intervals are within 1°C. See Figure 3.
Current cycling	Measure LLCR initially and every 5,000 cycles.	EIA-364-55, Test Condition B, Test Method 4. Subject specimens to 10,000 cycles of 3 minutes ON and 3 minutes OFF at specified current. See Figures 3 and 4.
<b>MECHANICAL</b>		
Vibration, random	No discontinuities of 1 microsecond of longer duration. See below Note.	EIA-364-28. Subject specimens to 3.10 G's rms between 20 to 500 Hz. Three hours in each of 3 mutually perpendicular planes. See Figure 5
Termination tensile strength	See Figure 4.	EIA-364-8. Determine tensile strength at a max rate of $25 \pm 6$ mm per minute.
<b>ENVIRONMENTAL</b>		
Thermal shock	See below Note.	EIA-364-32. Subject specimens to 50 cycles between -65°C and +150°C with 30 minutes at each temperature extreme.
Humidity Exposure	See below Note.	EIA-364-31, Method III. Subject specimens to 96 hours at 90-95% RH and 40°C.
Temperature Life	See below Note.	EIA-364-17, Method A. Subject specimens to 96 hours at 150°C

**Figure 1**



**NOTE**

*Shall meet visual requirements, show no physical damage, and meet requirements of additional tests as specified in the Product Qualification and Requalification Test Sequence shown in Figure 2.*

3.5. Product Qualification and Requalification Test Sequence

TEST OR EXAMINATION	TEST GROUP (a)		
	1	2	3
	TEST SEQUENCE (b)		
Initial examination of product	1	1	1
Low level contact resistance	2,6,9	2,4	
Temperature rise vs. current	3,10		
Current cycling		3	
Vibration, random	8		
Termination tensile strength			2
Thermal shock	5		
Humidity exposure	7		
Temperature life	4		
Final examination of product	11	5	3

Figure 2



**NOTE**

- (a) See paragraph 4.1.A
- (b) Numbers indicate sequence in which tests are performed.

**4. QUALITY ASSURANCE PROVISIONS**

4.1. Qualification Testing

A. Specimen Selection

Specimens shall be prepared in accordance with applicable Instruction Sheets and shall be selected at random from current production. Each test group shall consist of a minimum of 5 specimens.

B. Test Sequence

Qualification inspection shall be verified by testing specimens as specified in Figure 2.

4.2. Requalification Testing

If changes significantly affecting form, fit or function are made to the product or manufacturing process, product assurance shall coordinate requalification testing; consisting of all or part of the original testing sequence as determined by development/product, quality and reliability engineering.

4.3. Acceptance

Acceptance is based on verification that the product meets the requirements of Figure 1. Failures attributed to equipment, test setup or operator deficiencies shall not disqualify the product. If product failure occurs, corrective action shall be taken and specimens resubmitted for qualification. Testing to confirm corrective action is required before resubmittal.

4.4. Quality Conformance Inspection

The applicable quality inspection plan shall specify the sampling acceptable quality level to be used. Dimensional and functional requirements shall be in accordance with the applicable product drawing and this specification

### Temperature and Low Level Contact Resistance Measurement Points

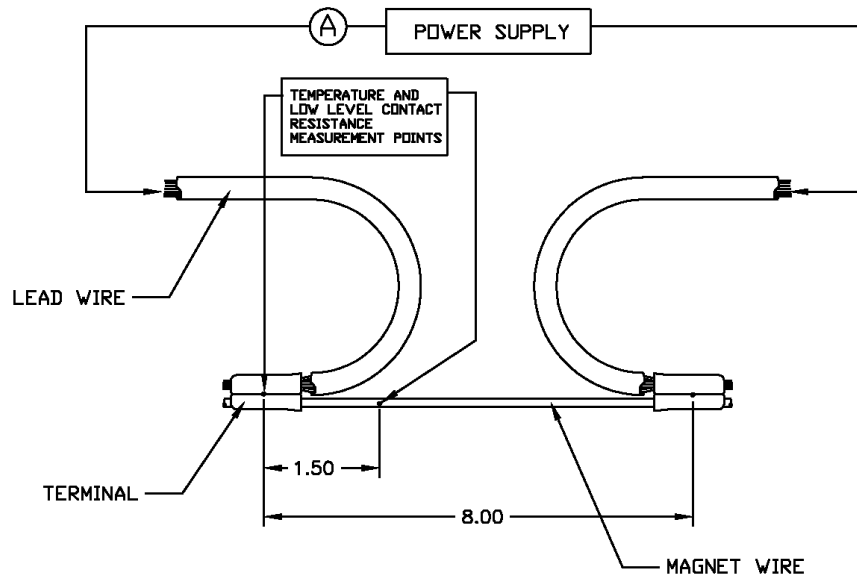


Figure 3

### Current, Resistance and Crimp Tensile Requirements

Wire Size			Current and Resistance Specifications						Tensile Strength Specs [lbs]	
AWG	MM	CMA	Copper		Low Level Resistance* (mΩ max)	Aluminum		Low Level Resistance* (mΩ max)	Copper	Aluminum
			Current (amps)			Current (amps)				
			T-Rise	Cycled		T-Rise	Cycled			
28	0.32	159	2.5	5.0	14.4	2.0	3.5	28.9	2.8	0.90
28½	0.30	144	2.2	4.7	16	1.8	3.2	32.5	2.5	0.84
29	0.29	128	2.0	4.5	18	1.7	3.0	36	2.1	0.77
29 ½	0.27	115	1.7	4.0	21	1.5	2.6	41	1.8	0.69
30	0.25	100	1.5	3.5	23	1.3	2.3	46	1.4	0.60
30½	0.24	90	1.3	2.6	25	1.0	1.8	52	1.2	0.54
31	0.23	79	1.0	2.0	26	0.7	1.3	58	1.0	0.48
32	0.20	64	0.8	1.5	36	0.6	1.0	72	0.7	0.39
32½	0.19	56	0.6	1.2	45	0.5	0.8	81	0.7	0.35
33	0.18	50	0.5	0.8	55	0.4	0.7	91.5	0.7	0.30
34	0.16	40	0.4	0.7	64	0.2	0.3	116	0.6	0.24
35	0.14	31	0.3	0.5	73	0.1	0.2	146	0.5	0.19

\*Resistance measurement includes crimp + 1.5 inches of wire.

Figure 4

### Vibration Mounting Fixture

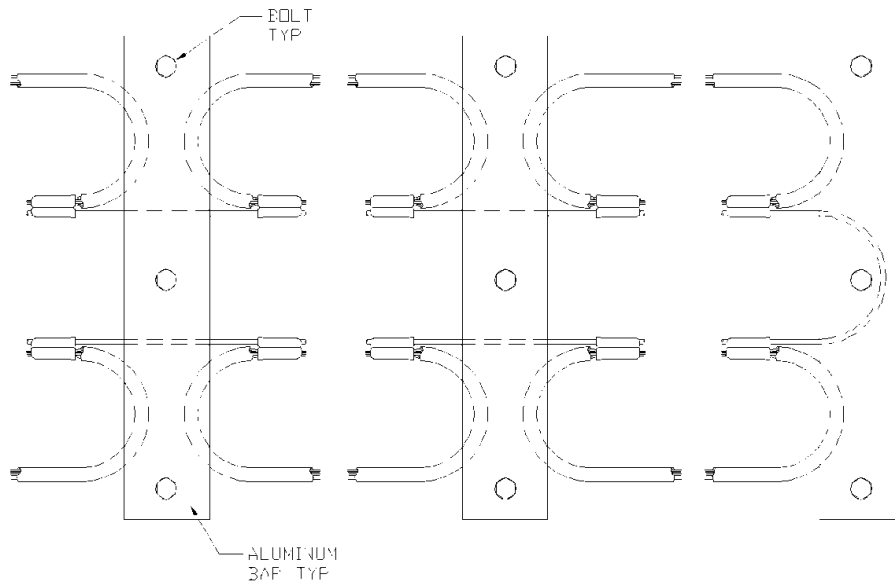


Figure 5

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)