

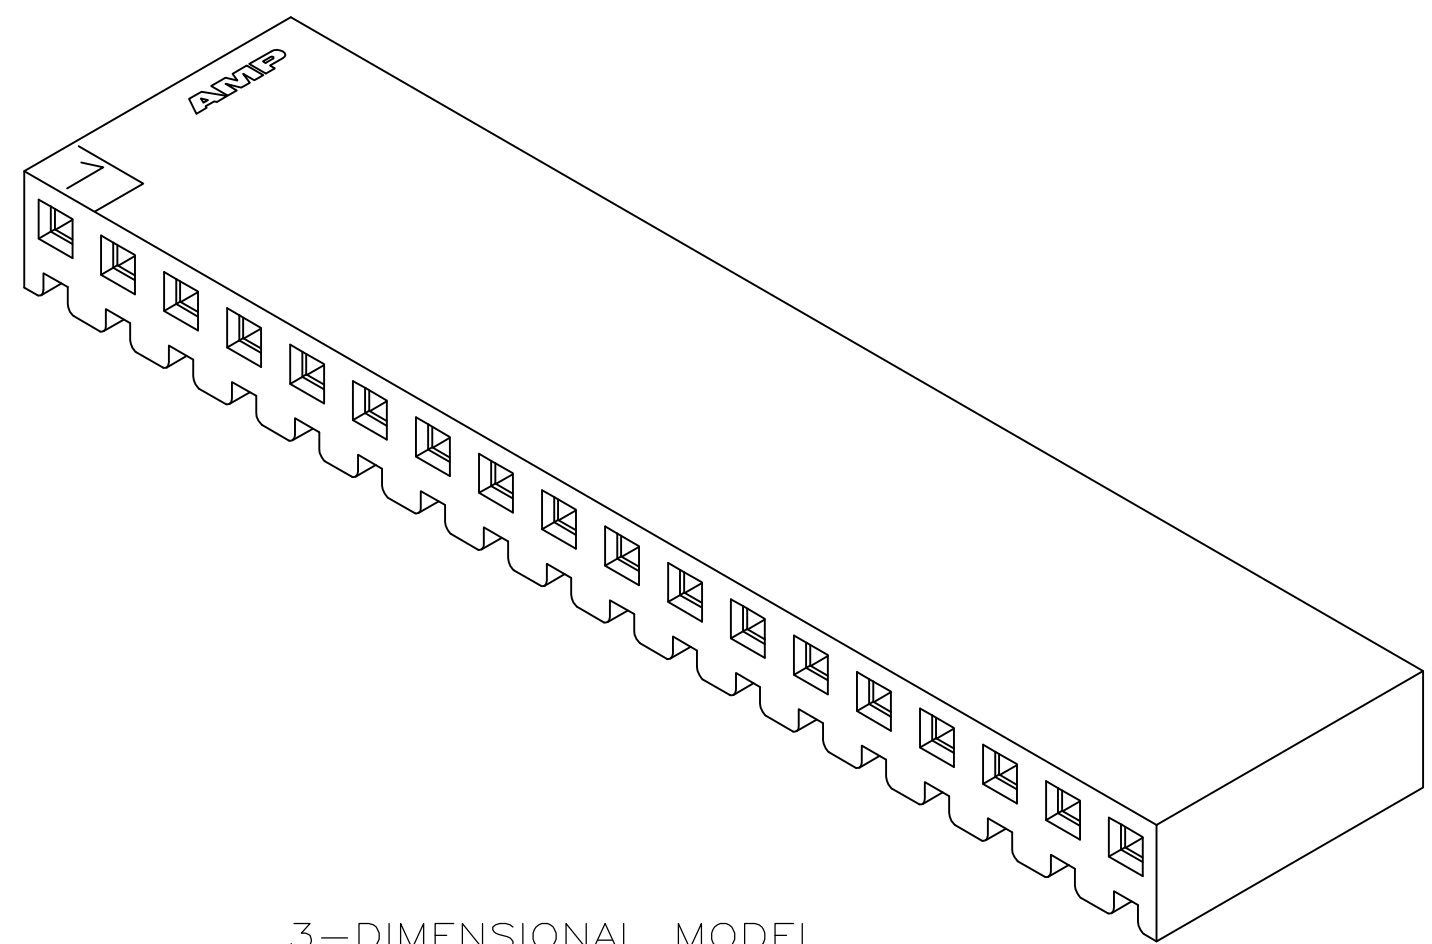
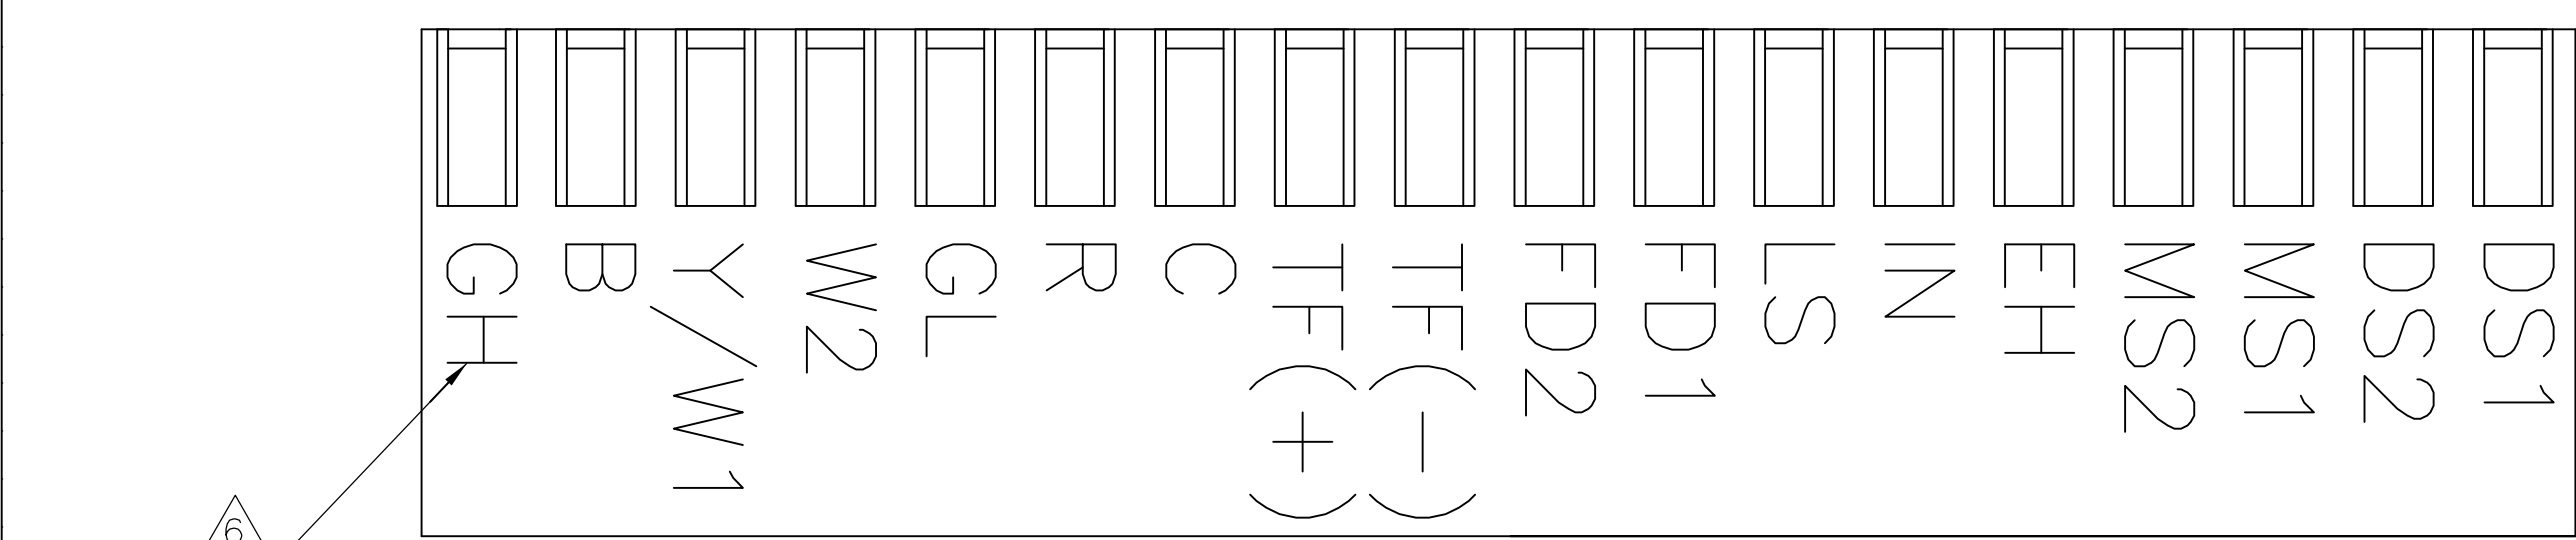
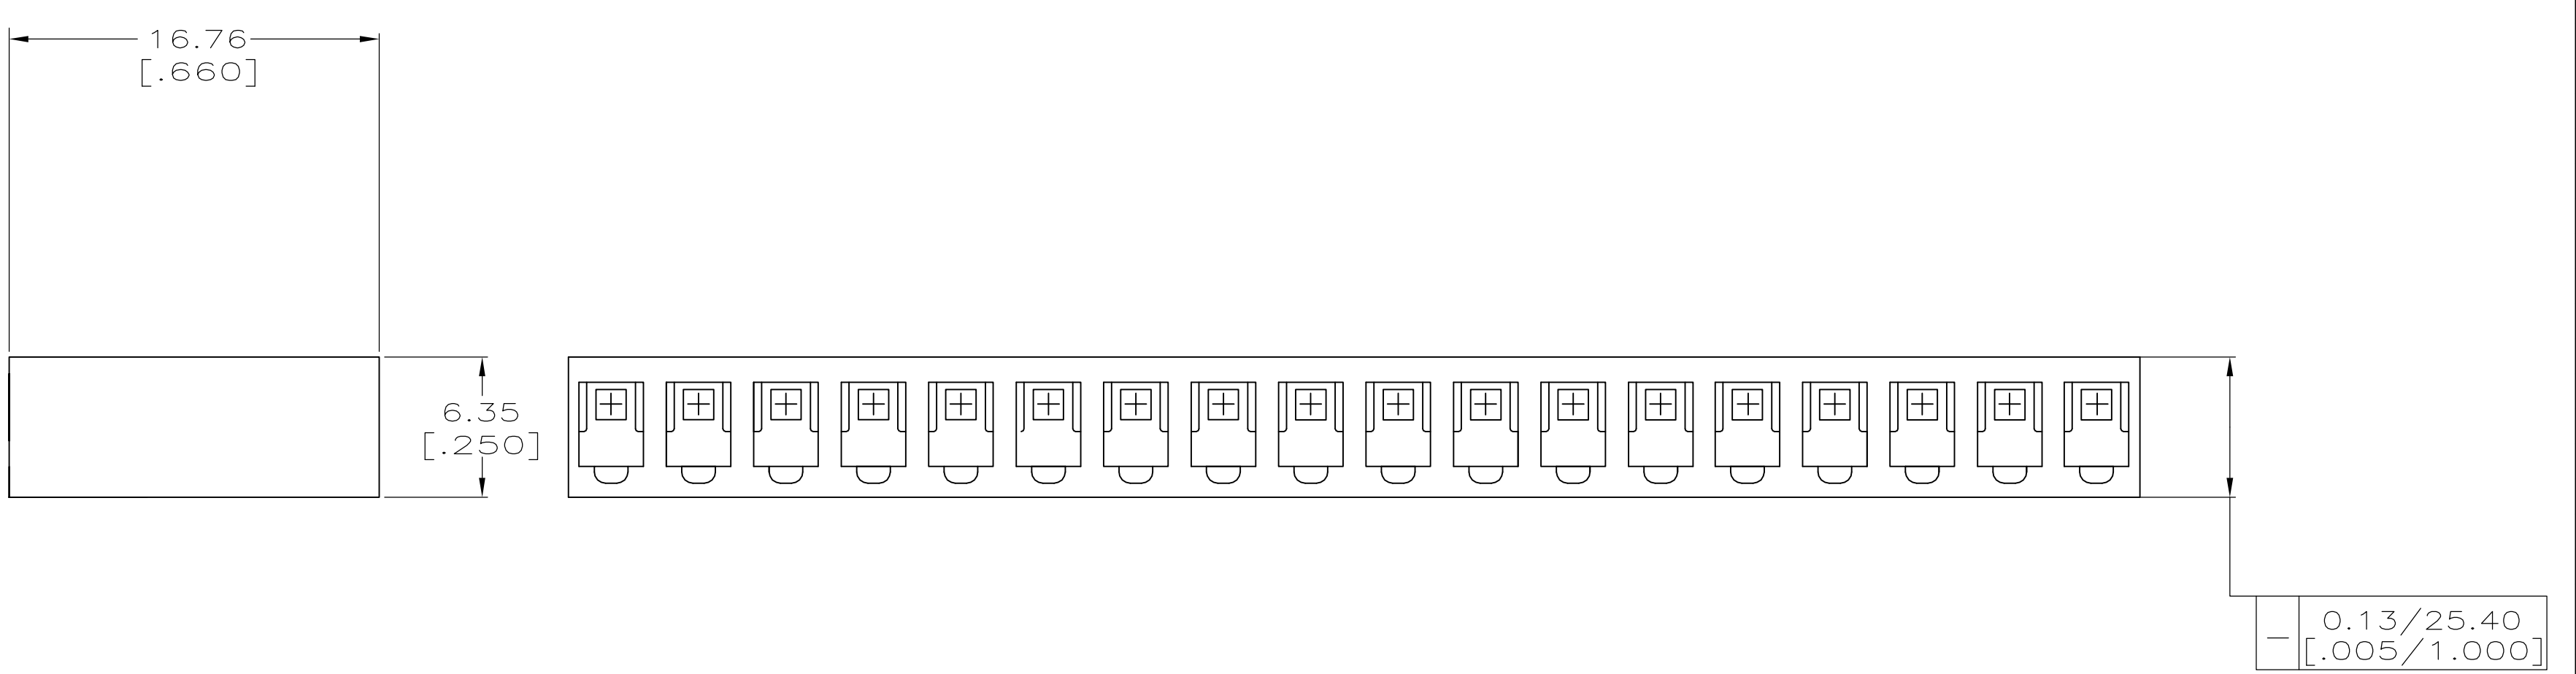
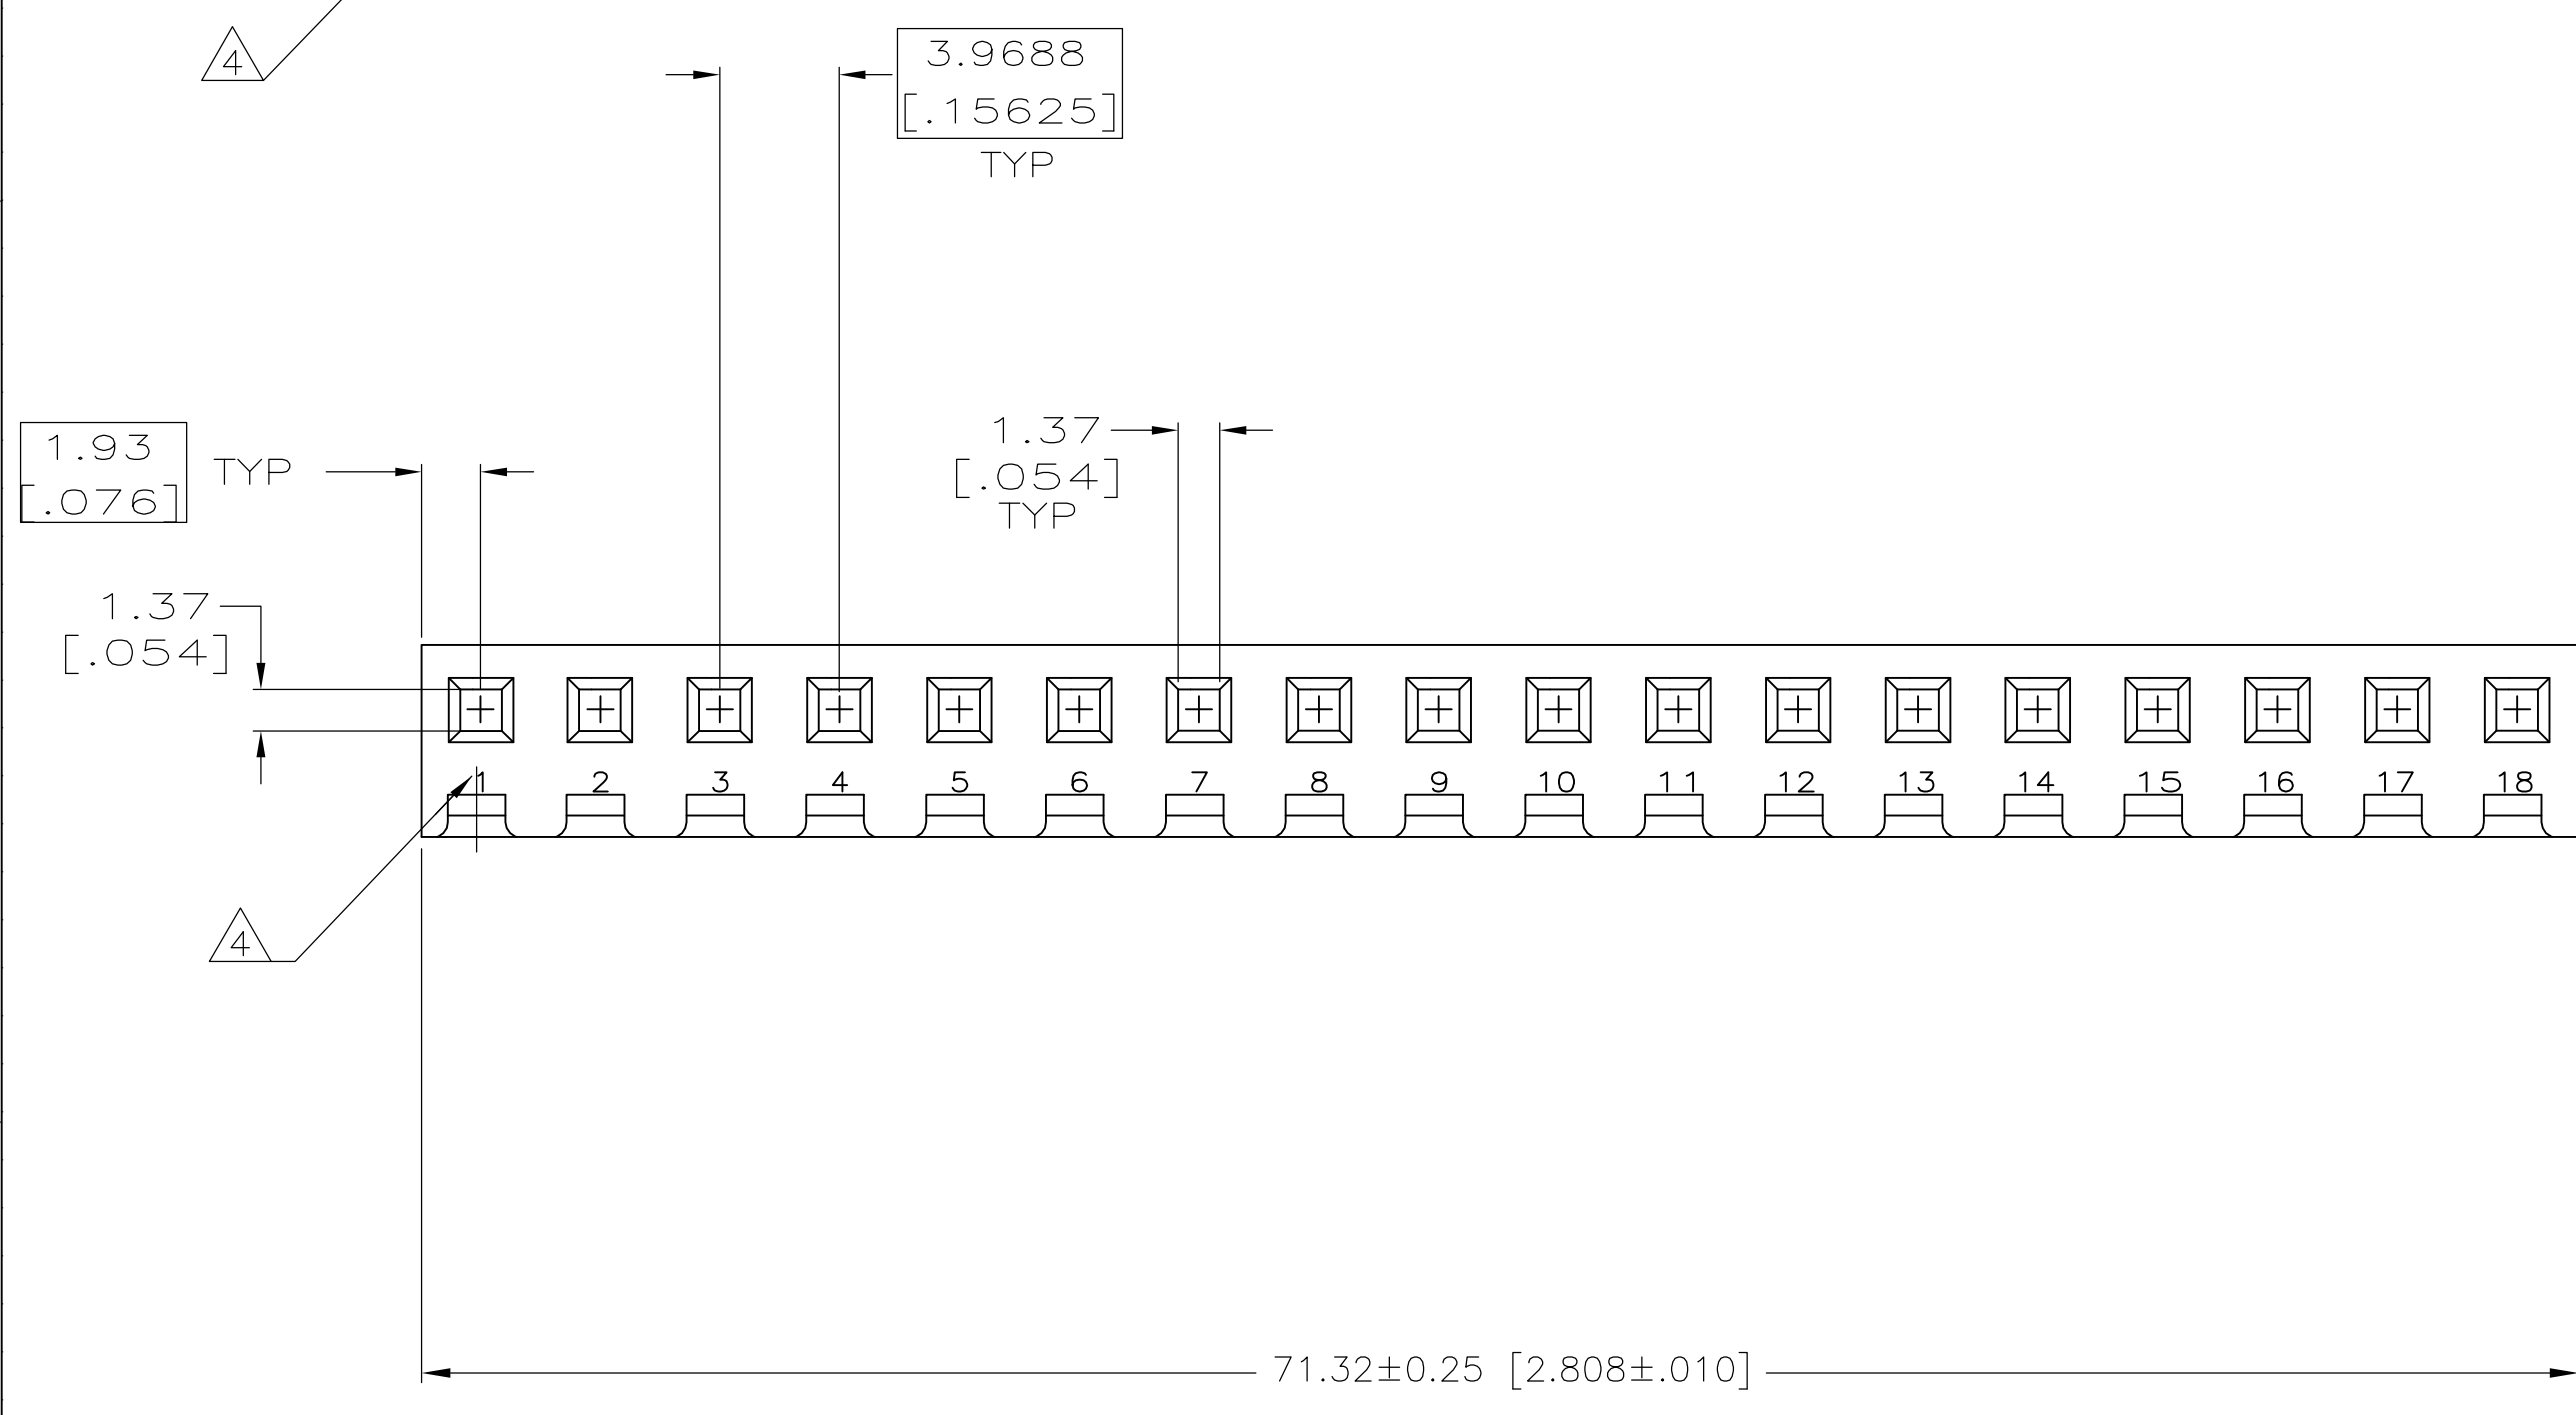
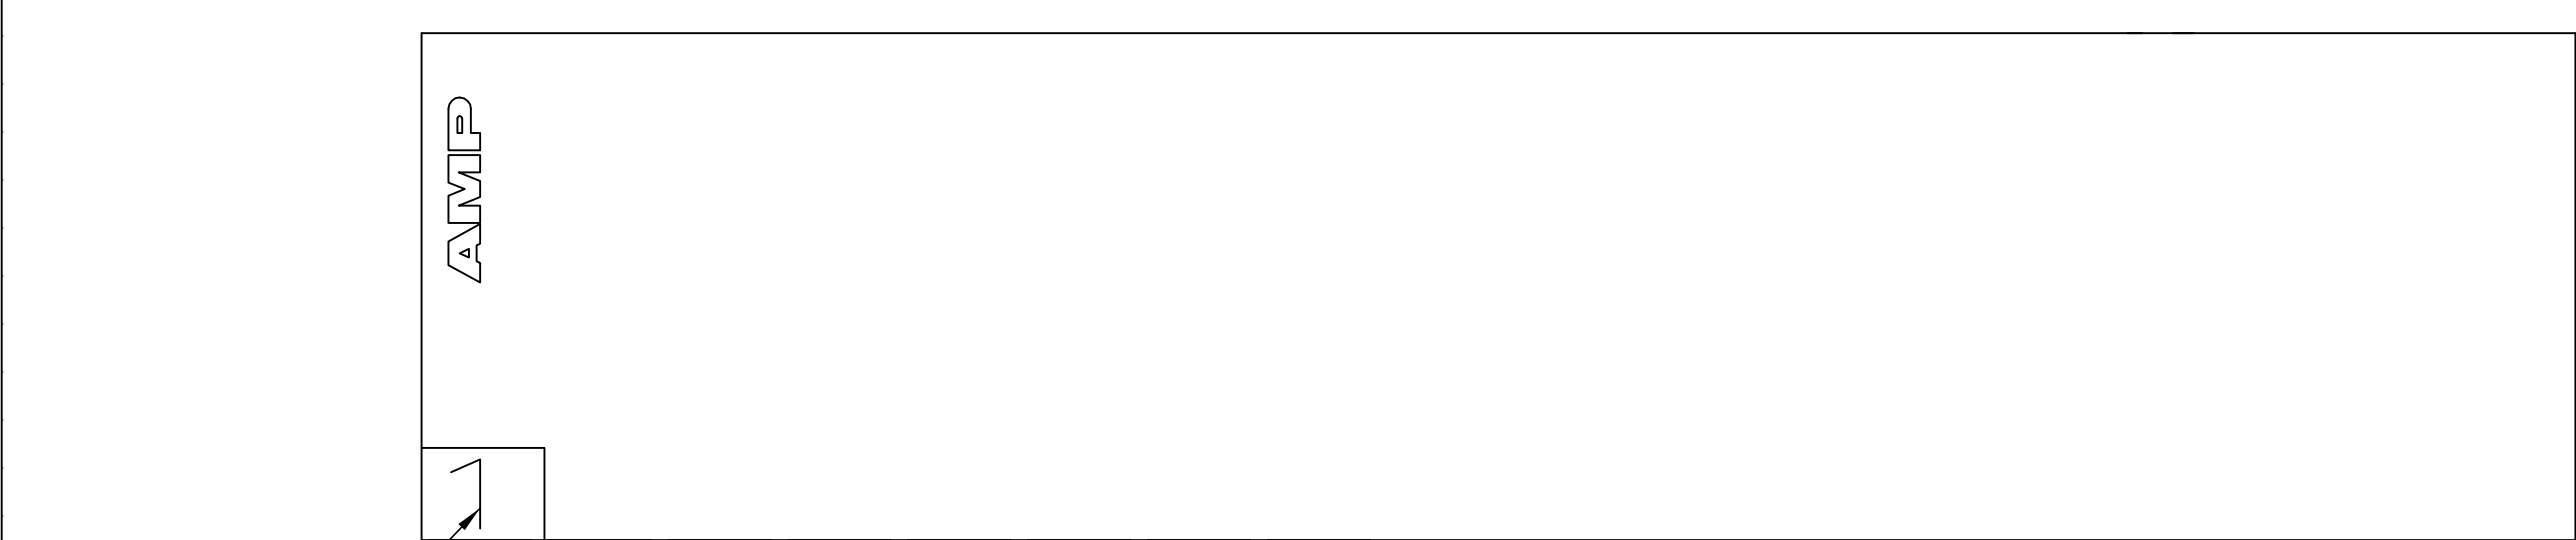



LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
B		REVISED PER ECR-12-015173	23FEB2013	KH	TM		

- 1 UNIT ACCEPTS 1.14 [.045] SQUARE OR ROUND POST.
- 2 UNIT ACCEPTS STANDARD SL-156 CONTACTS.
- 3 UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
- 4  CIRCUIT I.D. NUMBER(S) TO BE LOCATED SEQUENTIALLY AS SHOWN OR ONLY NO. 1 CIRCUIT PLACED ON TOP OF HOUSING.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6  IDENTIFY CIRCUITS AS SHOWN.



3-DIMENSIONAL MODEL NTS

1-1744158-8
 PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K. WHITAKER 28JULY2005	 TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK D. ROSSI 28JULY2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. ROSSI 28JULY2005	NAME HOUSING WITHOUT LOCKING RAMP,SPECIAL LABELED, SL-156	
0 PLC ± -		PRODUCT SPEC	SIZE A1	
1 PLC ± -		APPLICATION SPEC	CAGE CODE 1744158	
2 PLC ± -			DRAWING NO 1744158	
3 PLC ± 0.13 [.005]			RESTRICTED TO	
4 PLC ± -			WEIGHT	
ANGLES ± -			CUSTOMER DRAWING	
MATERIAL NYLON,UL 94V-0		FINISH	SCALE 4:1	
			SHEET 1 OF 1	
			REV B	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)