


SPECIFICATION CONTROL DRAWING

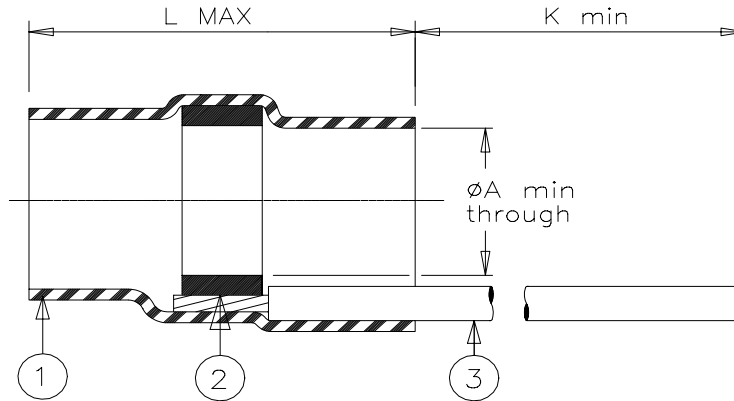


Product Revision		Product Dimensions			Cable Dimensions	
Product Name		L max	A min	K min	F max	C nom
B-801-68-05-02	A	7.1 (0.280)	1.4 (0.055)	70 (2.760)	1.2 (0.050)	4.5 (0.180)

MATERIAL

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Sn96 per ANSI J-STD-006.
FLUX: TYPE ROM1 per ANSI J-STD-004.
- CONDUCTOR LEAD: RAYCHEM 55A0111-28 in accordance with MIL-W-22759/32 AWG28 stranded tin plated copper wire. Color: blue.

APPLICATION

- These parts are designed to provide an environment protection shield termination on cables, rated for 150°C minimum, meeting the dimensional criteria listed and having nickel coated pins.
- Temperature range: -55°C to +175°C.
- Install using Raychem approved convection or infrared tools in accordance with Raychem installation procedure RCPS-200-12.

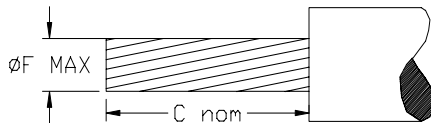

*A trademark of Raychem Corporation.

Raychem		THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	SOLDERSLEEVE* DEVICE WITH PRE-INSTALLED LEAD HIGH TEMPERATURE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO: B-801-68-05-02			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D980555	REPLACES: 80168052		
DRAWN BY: R. MAPALO	DATE: 07/06/98	REV.: SEE TABLE	DOC ISSUE: 3	SCALE: NONE	SIZE: A	SHEET: 1 of 1	

**If this document is printed it becomes uncontrolled.
Check with the web for latest revision.**

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)