
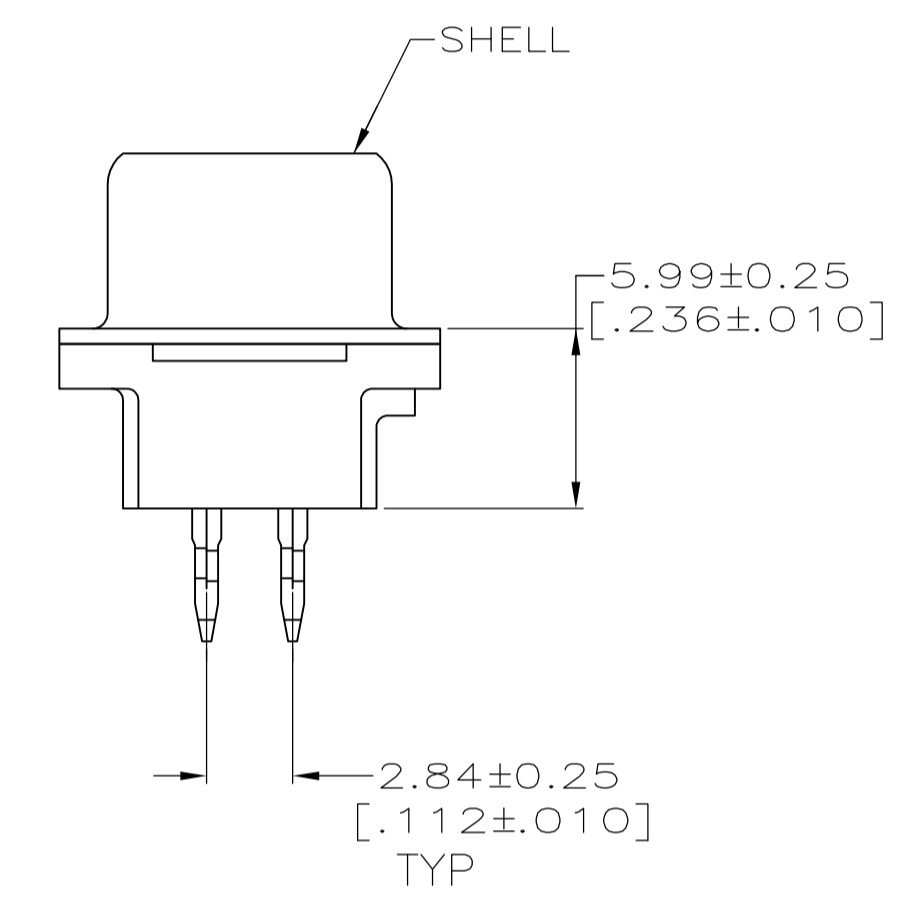


LOC		DIST		REVISIONS			
GP	00	REV	DATE	BY	APPV	DATE	REV
C		REVISED PER ECO-12-000090	27JAN2011	CJV	SLB		

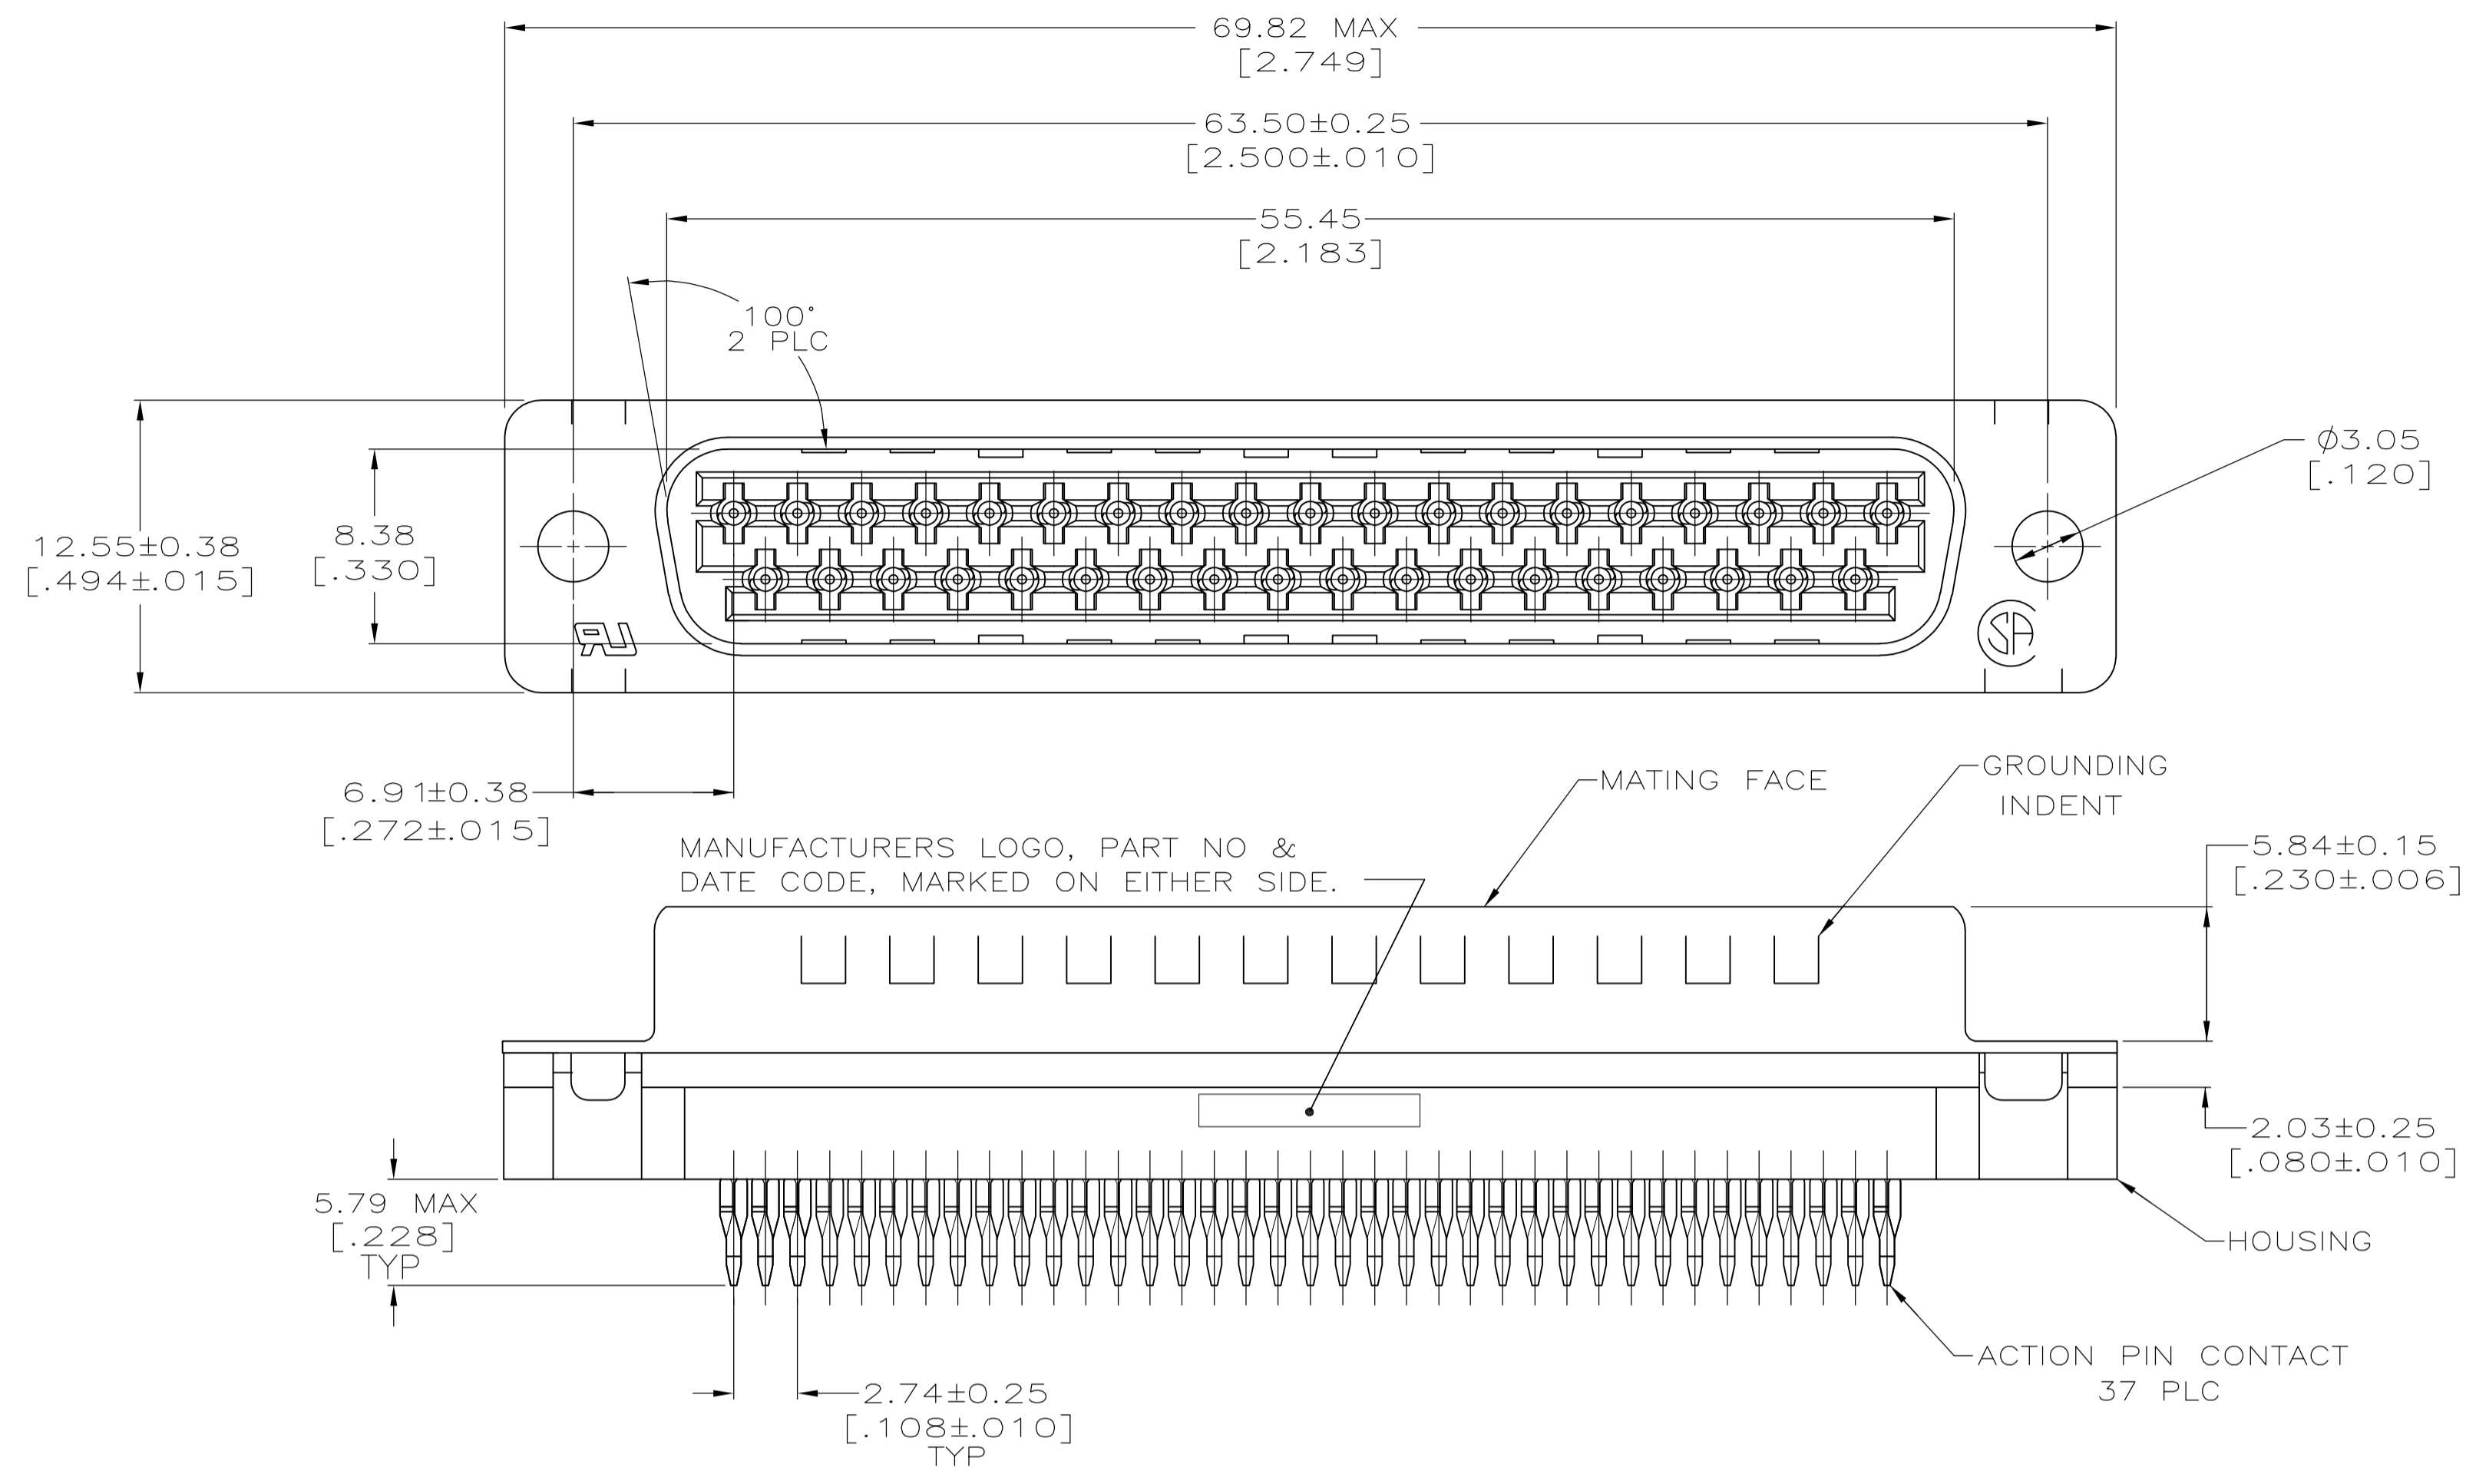

- 1 FOR USE WITH 2.36 [.093] MINIMUM THICK PRINTED CIRCUIT BOARD. REFER TO APPLICATION SPECIFICATION FOR PRINTED CIRCUIT BOARD LAYOUT DIMENSIONS AND FINISH RECOMMENDATIONS.
- 2 HOUSING: NYLON OR POLYESTER, UL 94V-0 RATED, GLASS FILLED, BLACK. CONTACTS: COPPER ALLOY SHELL: CARBON STEEL
- 3 CONTACTS:  
0.76 MICRO METERS [.000030] MINIMUM GOLD IN MATING AREA.  
2.54 MICRO METERS [.000100] MINIMUM TIN ON COMPLIANT PIN.  
ALL OVER 1.27 MICRO METERS [.000050] MINIMUM NICKEL.  
OR  
GOLD FLASH OVER PALLADIUM NICKEL.  
0.76 MICRO METERS [.000030] MINIMUM TOTAL IN MATING AREA.  
2.54 MICRO METERS [.000100] MINIMUM TIN ON COMPLIANT PIN.  
ALL OVER 1.27 MICRO METERS [.000050] MINIMUM NICKEL.
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMERS.

5788458-1  
PART NUMBER

**COPYRIGHT 2005  
TYCO ELECTRONICS CORP  
ALL RIGHTS RESERVED**

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DIN L. VARELA - DOCKS 04-01-05	TE Connectivity	
DIMENSIONS: INCHES		CHK S. BOLASH 04-01-05	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV M. WALMSLEY 04-01-05	PLUG ASSEMBLY, SIZE 4, 37 POSITION, MEDIUM PROFILE, ACTION PIN, FRONT METAL SHELL, AMPLIMITE HD-20	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	108-40014	
2 PLC ± 0.13 [.005]	3 PLC ± -	APPLICATION SPEC	114-40026 1	
4 PLC ± -	ANGLES ± °	SIZE	A1	00779
MATERIAL	FINISH	WEIGHT	5788458	RESTRICTED TO
2	3 4	CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 1 REV C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)