
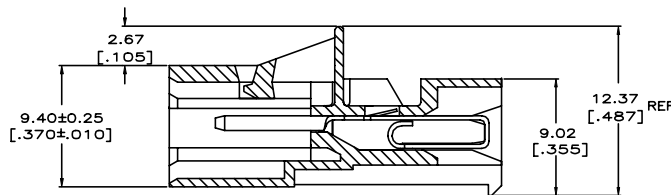
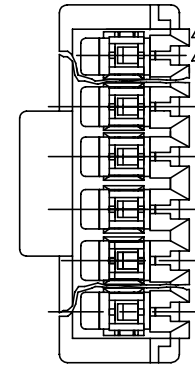
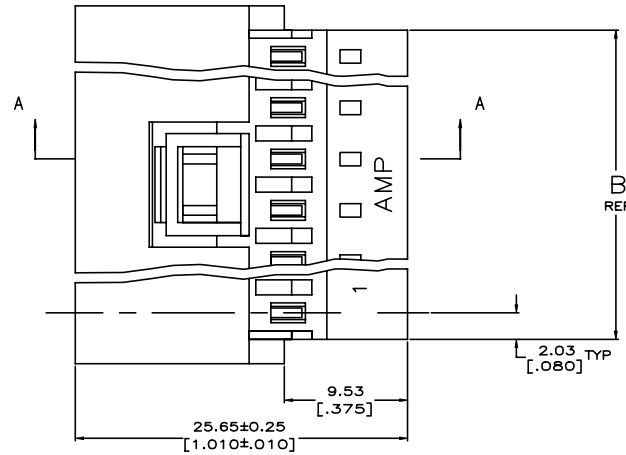


REV	DATE	DESCRIPTION	BY	CHK	APP
0					
J	22MAY2020	REVISED PER ECR-20-000808		PC	SW

- MATERIAL: CONNECTOR- NYLON UL94V-2 (YELLOW), CONTACTS- 0.30 [.012] THK COPPER ALLOY (BRIGHT TIN-LEAD 0.00203 [.000080] MIN THK). (MATTE TIN 0.00203 [.000080] MIN THK FOR CONTACTS 3-641436-2 THRU 5-641436-4)
- CONTACTS ACCEPT #20 AWG SOLID, FUSED STRANDED OR STRANDED (7 STRANDS) WIRE WITH 2.41 [.095] MAX INSULATION DIA.
- BOW, IN ANY DIRECTION, NOT TO EXCEED 0.15 [.006] PER IN.
- HOUSING FEATURES: CLOSED END.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- NOTE DELETED.

OBsolete PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
 OBSOLETE PARTS

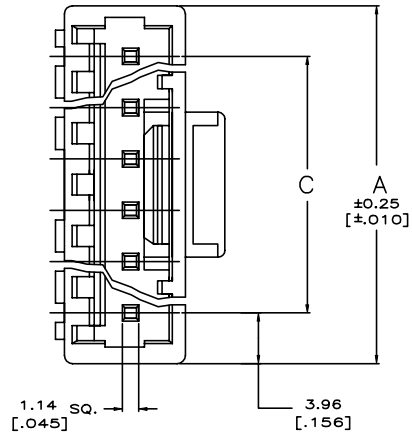

SECTION A-A

FINISH	C	B	A	NO. OF CIRCUITS	PART NUMBER
TIN	91.14 [3.588]	95.20 [3.748]	99.06 [3.900]	24	5-641436-4
	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-641436-5
	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-641436-2
	31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-641436-9
	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-641436-6
	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-641436-4
	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-641436-3
	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-641436-2
OBsolete	91.14 [3.588]	95.20 [3.748]	99.06 [3.900]	24	2-641436-1
OBsolete	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	1-641436-8
OBsolete	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	1-641436-2
TIN-LEAD	31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	641436-9
	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	641436-6
	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	641436-4
	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	641436-3
	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	641436-2

THIS DRAWING IS A CONTROLLED DOCUMENT. BY: K. SALMON 10-22-21
 DATE: 10-22-21
 Dwg. No.: 100779C-641436

TE Connectivity
 MTA 156
 POSTED CONNECTOR ASSEMBLY,
 20 AWG

DATE CODE: A1
 Dwg. No.: 100779C-641436
 SCALE: 5:1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)