


1. NOTE DELETED.
2. HOUSING: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC, BLACK  
SHELLS: CARBON STEEL  
CONTACTS: BRASS  
INSERTS: BRASS  
SCREWLOCKS: ZINC
3. SHELLS: .000200 MIN TIN OVER .000100 MIN COPPER.  
INSERTS: UNPLATED.  
SCREWLOCKS: UNPLATED.  
CONTACTS: SEE TABLE.
4. GOLD PLATED FOR A LENGTH OF .150 MIN FROM MATING END, GOLD FLASH IN MATED AREA, .000100 MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER .000050 MIN NICKEL.
5. GOLD PLATED FOR A LENGTH OF .150 FROM MATING END, .000030 MIN GOLD IN MATED AREA, .000100 MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER .000050 MIN NICKEL.  
-OR-  
GOLD FLASH OVER PALLADIUM NICKEL PLATED FOR LENGTH OF .150 FROM MATING END, .000030 MIN PALLADIUM NICKEL IN MATED AREA, .000100 MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER .000050 MIN NICKEL.
6. NOTE DELETED.
7. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMERS.
8. .110 MAX IN SHELL TAB CLINCH AREAS.

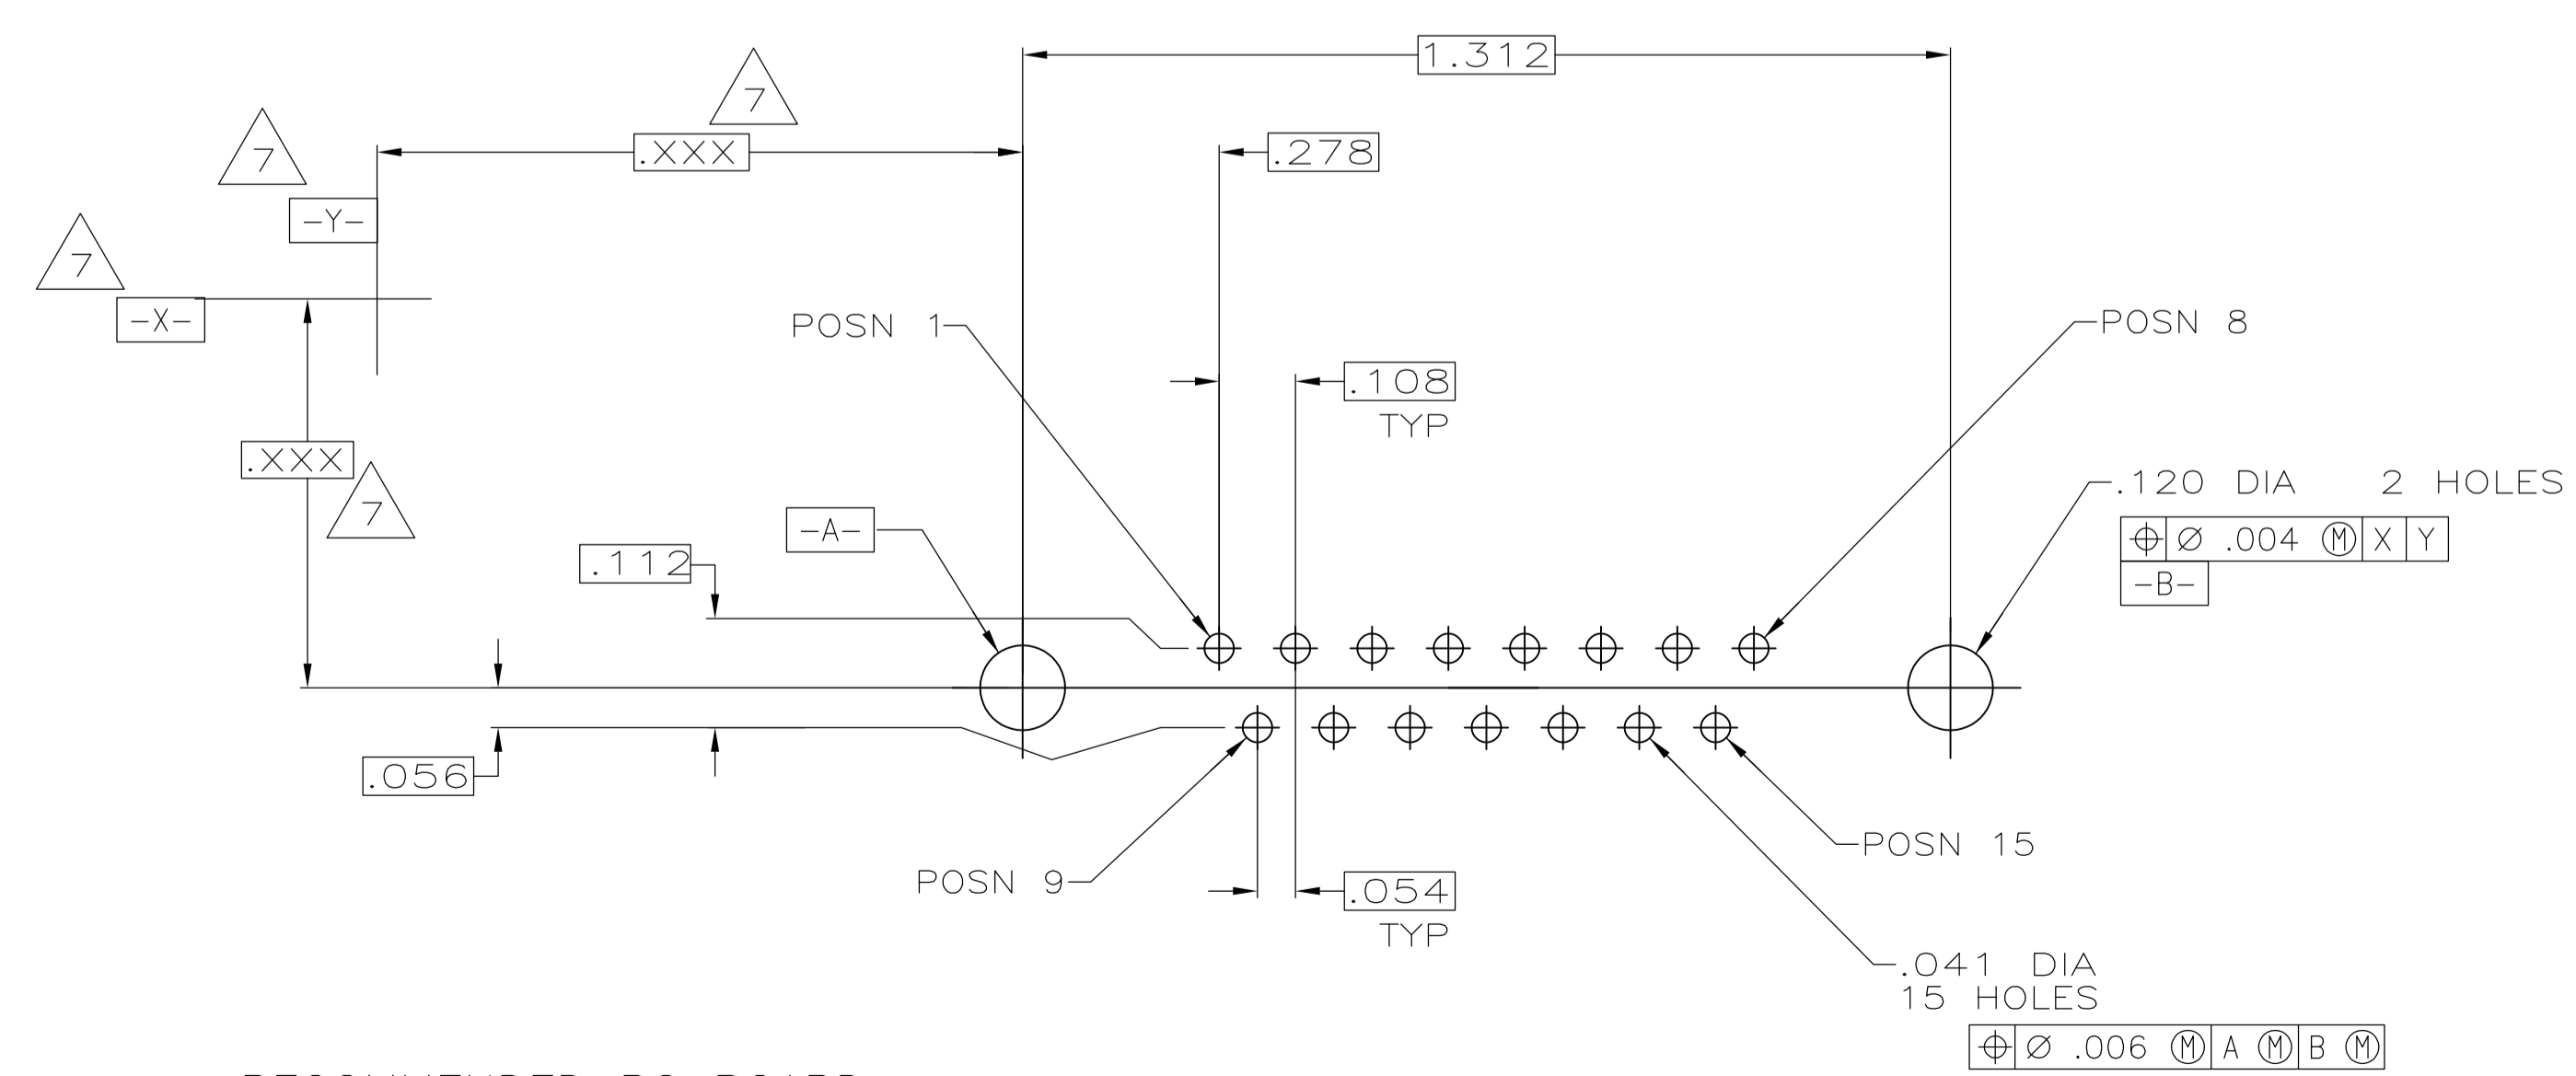

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

OBSOLETE	NO	W/THREADED INSERTS	5	.125	1-747872-9
OBSOLETE	YES	W/FEMALE SCREWLOCKS	5	.250	1-747872-8
OBSOLETE	YES	W/FEMALE SCREWLOCKS	4	.250	1-747872-7
	YES	W/FEMALE SCREWLOCKS	5	.170	1-747872-6
SUPERSEDED BY 1-747872-6	YES	W/FEMALE SCREWLOCKS	4	.170	1-747872-5
SUPERSEDED BY 1-747872-6	YES	W/FEMALE SCREWLOCKS	5	.125	1-747872-4
OBSOLETE	YES	W/FEMALE SCREWLOCKS	4	.125	1-747872-3
OBSOLETE	YES	W/THREADED INSERTS	5	.250	1-747872-2
OBSOLETE	YES	W/THREADED INSERTS	4	.250	1-747872-1
OBSOLETE	YES	W/THREADED INSERTS	5	.170	1-747872-0
OBSOLETE	YES	W/THREADED INSERTS	4	.170	747872-9
	YES	W/THREADED INSERTS	5	.125	747872-8
OBSOLETE	YES	W/THREADED INSERTS	4	.125	747872-7
OBSOLETE	YES	W/.120 DIA. HOLE	5	.250	747872-6
OBSOLETE	YES	W/.120 DIA. HOLE	4	.250	747872-5
	YES	W/.120 DIA. HOLE	5	.170	747872-4
	YES	W/.120 DIA. HOLE	4	.170	747872-3
SUPERSEDED BY 747872-4	YES	W/.120 DIA. HOLE	5	.125	747872-2
OBSOLETE	YES	W/.120 DIA. HOLE	4	.125	747872-1

GROUNDING INDENTS	REMARKS	CONTACT FINISH	DIM A	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.				
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		
0 PLC ± -		1 PLC ± -		
1 PLC ± -		2 PLC ± -		
2 PLC ± -		3 PLC ± .005		
3 PLC ± -		4 PLC ± -		
4 PLC ± -		ANGLES ± °		
MATERIAL		FINISH		
DIN S.WELDON 12-25-85		CIRK 12-25-85		
APVD R.BRANDT 12-2-85		NAME		
PRODUCT SPEC 108-40025		PLUG ASSEMBLY, SIZE 2, 15 POS., VERTICAL, .026 DIA. POSTS, FRONT SHELL, AMPLIMITE™HDP		
APPLICATION SPEC 114-40023		SIZE CASE CODE DRAWING NO RESTRICTED TO		
WEIGHT		A1 00779 C=747872		
CUSTOMER DRAWING		SCALE NTS SHEET 1 OF 1 REV L1		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)