


DESIGNED FOR USE WITH RG-174/U OR EQUIVALENT	
CABLE ENTRY DIAMETER MINIMUM	
CONTACT	.023
HOUSING	.064
FERRULE	.109

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₂	REVISED	02/10/95	<i>AD</i>

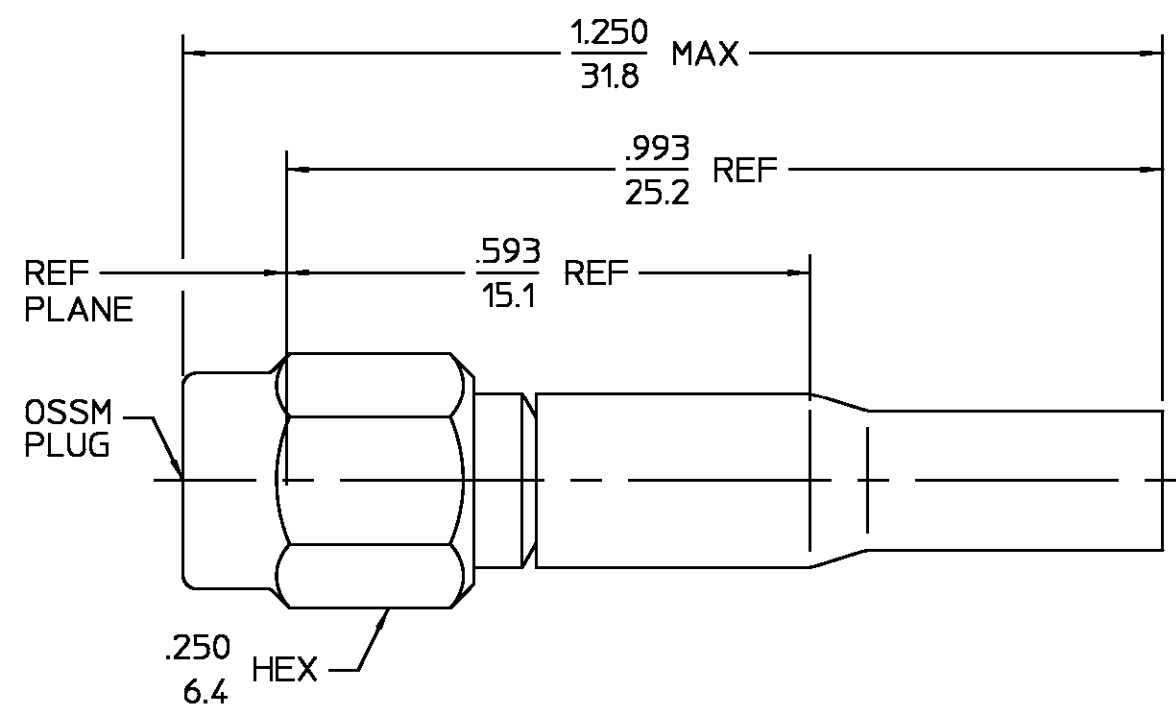

COMPONENT	MATERIAL	FINISH
COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM-B-194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A
SHRINK TUBING	HEAT SHRINKABLE POLYOLEFIN COMPOUND MIL-I-23053/4	N/A
FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM	GOLD PLATE PER MIL-G-45204

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348A, Fig. <u>319.1</u>	Temperature Rating <u>-65°C to +165°C</u>
Frequency Range (GHz) DC to <u>12.4</u>	Recommended Mating Torque <u>5 in-lbs</u>	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level <u>250</u>	Mating Characteristics: Insertion (MAX Lbs) <u>N/A</u>	Shock MIL-STD-202, Method 213, Condition I.
VSWR <u>1.025 ±.002 f(GHz)</u>	Withdrawal (MIN Oz) <u>N/A</u>	Thermal Shock MIL-STD-202, Method 107, Condition B,
Insertion Loss (dB MAX) <u>.06 √f(GHz)</u>	Force to Engage and Disengage (In-Lbs MAX) <u>2.0</u>	Except High Temp +85°C
RF Leakage (dB MIN) <u>N/A</u>	Center Contact Captivation Axial (Lbs) <u>6.0</u>	Moisture Resistance MIL-STD-202, Method 106
Corona, 70,000 Ft (VRMS MIN) <u>190</u>	Radial (In-Oz) <u>N/A</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>750</u>	Cable Retention Axial Force (Lbs MIN) <u>30</u>	
Contact Resistance (Milliohms MAX) Center Contact <u>3.0</u>	Torque (In-Oz) <u>N/A</u>	
Outer Contact <u>2.0</u>	Weight (Grams) <u>TBD</u>	
Cable to Housing <u>0.5</u>		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>500</u>		
IR.(Megohms MIN) <u>5,000</u>		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN BY <u>K.L.</u> DATE <u>3/22/71</u>	 AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599																
FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°	CHECKED BY <u>R.M.K.</u> DATE <u>3/23/71</u>																	
	APPD BY <u>PRB</u> DATE <u>3/24/71</u>																	
These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE 408-04790 NO. AP(10-010)	<table border="1"> <tr> <td colspan="2">TITLE</td> <td colspan="2">OSSM STRAIGHT CABLE PLUG SOLDER ATTACHMENT</td> </tr> <tr> <td>SIZE</td> <td>CODE IDENT NO.</td> <td>REV</td> <td></td> </tr> <tr> <td>B</td> <td>26805</td> <td>01₂</td> <td></td> </tr> <tr> <td colspan="2">SCALE 5 : 1</td> <td colspan="2">SHEET 1 OF 1</td> </tr> </table>	TITLE		OSSM STRAIGHT CABLE PLUG SOLDER ATTACHMENT		SIZE	CODE IDENT NO.	REV		B	26805	01 ₂		SCALE 5 : 1		SHEET 1 OF 1	
TITLE		OSSM STRAIGHT CABLE PLUG SOLDER ATTACHMENT																
SIZE	CODE IDENT NO.	REV																
B	26805	01 ₂																
SCALE 5 : 1		SHEET 1 OF 1																

.XXX = in
XX.X = mm

CUSTOMER DRAWING

AMP PART # 1045482-1
SHEET 1 OF 1 REV A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)