


1. MATERIAL: HOUSING - NYLON, COLOR: BLACK, UL 94V-0. OVERMOLDED TERMINAL ARRAY - PBT, BROWN. TERMINALS - 0.33[.013] THICK PHOS BRONZE PLATED WITH 1.27µm[.000050] MINIMUM HARD GOLD IN LOCALIZED AREA AND 3.81µm[.000150] MINIMUM TIN-LEAD IN SOLDER AREA OVER 1.27µm[.000050] MINIMUM NICKEL UNDERPLATE. SHIELD - 0.254[.010] THICK COPPER ALLOY PLATED WITH 1.27µm[.000050] MINIMUM NICKEL AND 2.03µm[.000080] MINIMUM TIN HOT DIP ON PCB GROUND TABS
2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
3. USE #30 DRILL BIT OR 3.25mm DRILL BIT WHEN PRODUCING THESE PCB HOLES.

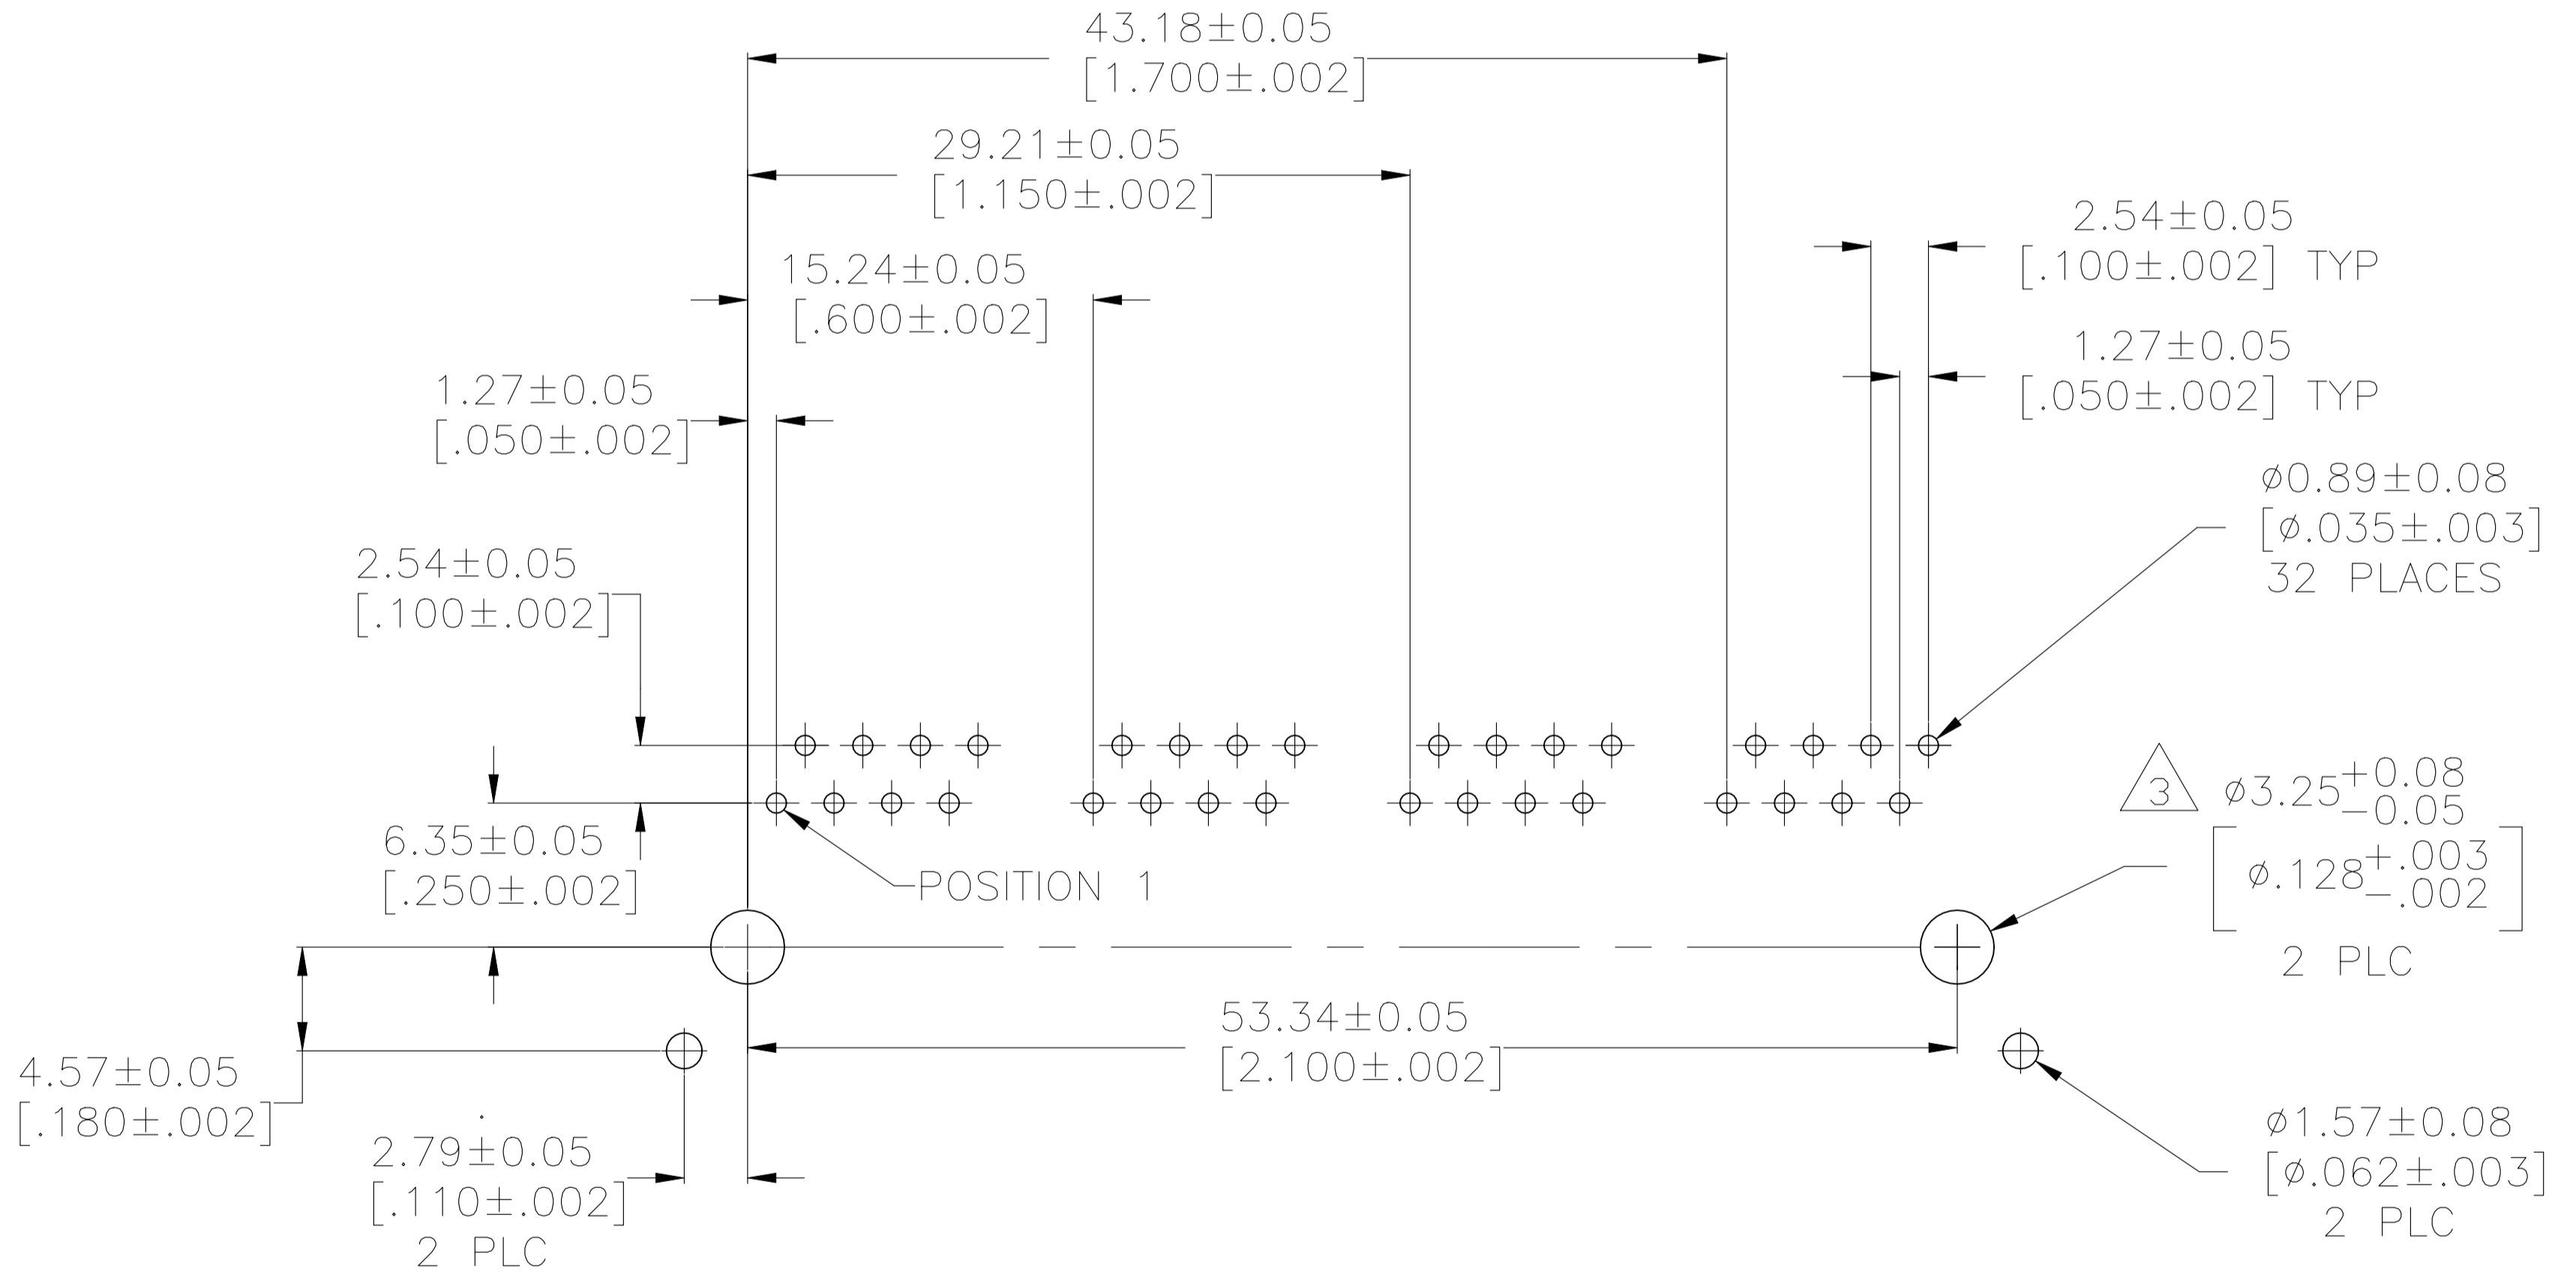

RECOMMENDED PC BOARD LAYOUT
 COMPONENT SIDE
 SEE APPLICATION SPECIFICATION

REVISIONS					
P	LTR	DESCRIPTION	DATE	DRN	APVD
C1		ECR-19-014657	13DEC2020	RR	SZ

6116527-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN L. VARELA - DOCKS 13JUN2005		TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK J. WESTMAN 13JUN2005		APVD S. FLICKINGER 13JUN2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		MODULAR JACK ASMBY, 8 P, 4 PORT, R/A, LOW PROFILE, SHIELDED, PCB GROUND, CAT 5e	
0. PLC ± -		PRODUCT SPEC		108-1163-2	
1. PLC ± -		APPLICATION SPEC		114-2048	
2. PLC ± 0.25(.01)		SIZE		A1	
3. PLC ± 0.13(.005)		CAGE CODE		00779	
4. PLC ± -		DRAWING NO		6116527	
ANGLES ± -		WEIGHT		0.000000	
MATERIAL SEE NOTE 1		FINISH SEE NOTE 1		CUSTOMER DRAWING	
		SCALE		4:1	
		SHEET		1 of 1	
		REV		C1	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)