

REVISONS		DATE	BY	APP'D
A	FIRST VERSION	17/02/04	GF	SM
B	ADD NEW PART No.	27/06/05	GF	SM



NOTES :

△ MATERIALS AND FINISH:

— HOUSING: PA66
 — CONTACTS: COPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE

- MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
- WIRE TYPES AND SIZES ACCEPTED
 WIRE RANGE: 20AWG~26AWG(SOLID&STRANDED)
 STRIP LENGTH: 7.5mm~8.5mm
- PACKAGED IN TRAY.
- CURRENT RATING: 5Amp AC300V.
- OPERATION TEMPERATURE: -40°C TO +105°C

PCB Layout

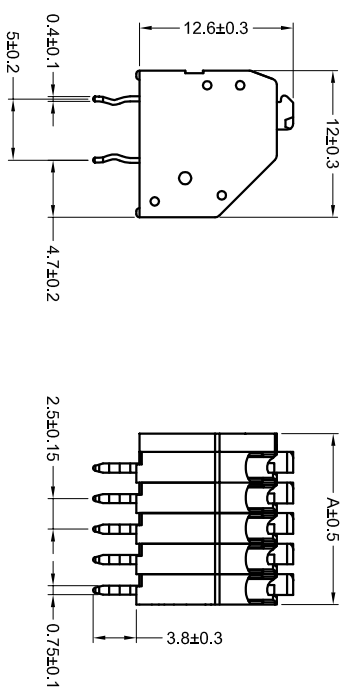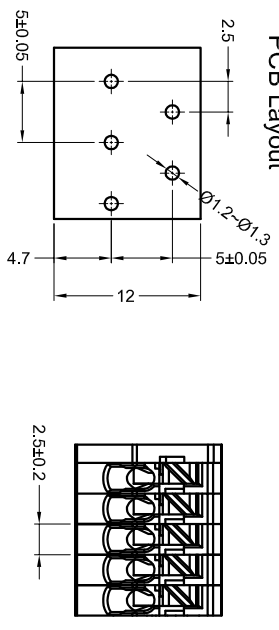

COLOR CODE:

- | | |
|----------|----------|
| 1=GREEN | 2=2 POSN |
| 2=BLUE | 3=3 POSN |
| 3=BROWN | 4=4 POSN |
| 4=ORANGE | 5=5 POSN |
| 5=GREY | 6=6 POSN |
| 6=RED | 7=7 POSN |
| 7=YELLOW | 8=8 POSN |
| 8=PURPLE | |
| 9=WHITE | |
| 0=BLACK | |

PIN No:

21.50	8 POSN	A	NO. OF POSITIONS
19.00	7 POSN		
16.50	6 POSN		
14.00	5 POSN		
11.50	4 POSN		
9.00	3 POSN		
6.50	2 POSN		

P/N: *-2834021-*

REMARK: THE DIFFERENT COLORS COULD BE COMBINED TO THE NEW CONNECTOR P/NS FOR CUSTOMER REQUEST.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSION FORM MATERIAL	DRAWING REVISION CUSTOMER DRAWING	DATE: 11/4-13/08/4 VERSION: 1	NAME: 2.50mm Pitch Modular Screwless Conn. SIZE: A2 CODE: 00779 SCALE: 1:1
-------------------------------	---	----------------------------------	---



TE Connectivity

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)