
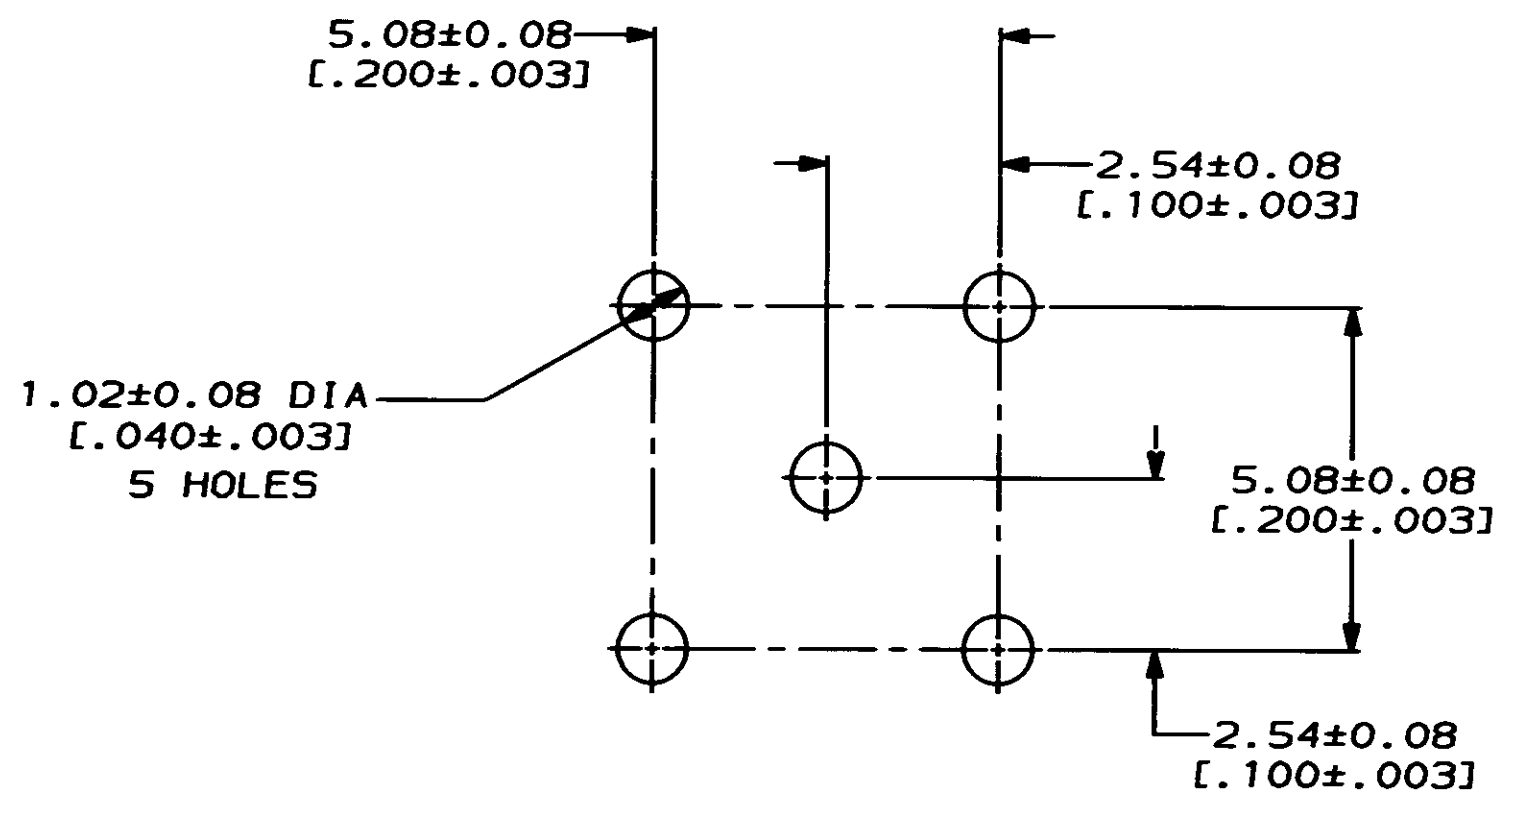


LOC		DIST		ZONE		LTR		REVISIONS		DATE	APPD
AJ	16	P	F					0	REL PER 92-3361-020	01/29/93	JPD

- 1 BRASS PER QQ-B-626
- 2 BERYLLIUM COPPER PER QQ-C-530
- 3 PTFE PER MIL-P-19468
- 4 NICKEL PL PER QQ-N-290
- 5 GOLD PL PER MIL-G-45204
- 6. DIELECTRIC AND CONTACT ASSEMBLY WILL WITHSTAND 2.5 LB PUSHOUT FORCE DIRECTED FROM MATING END

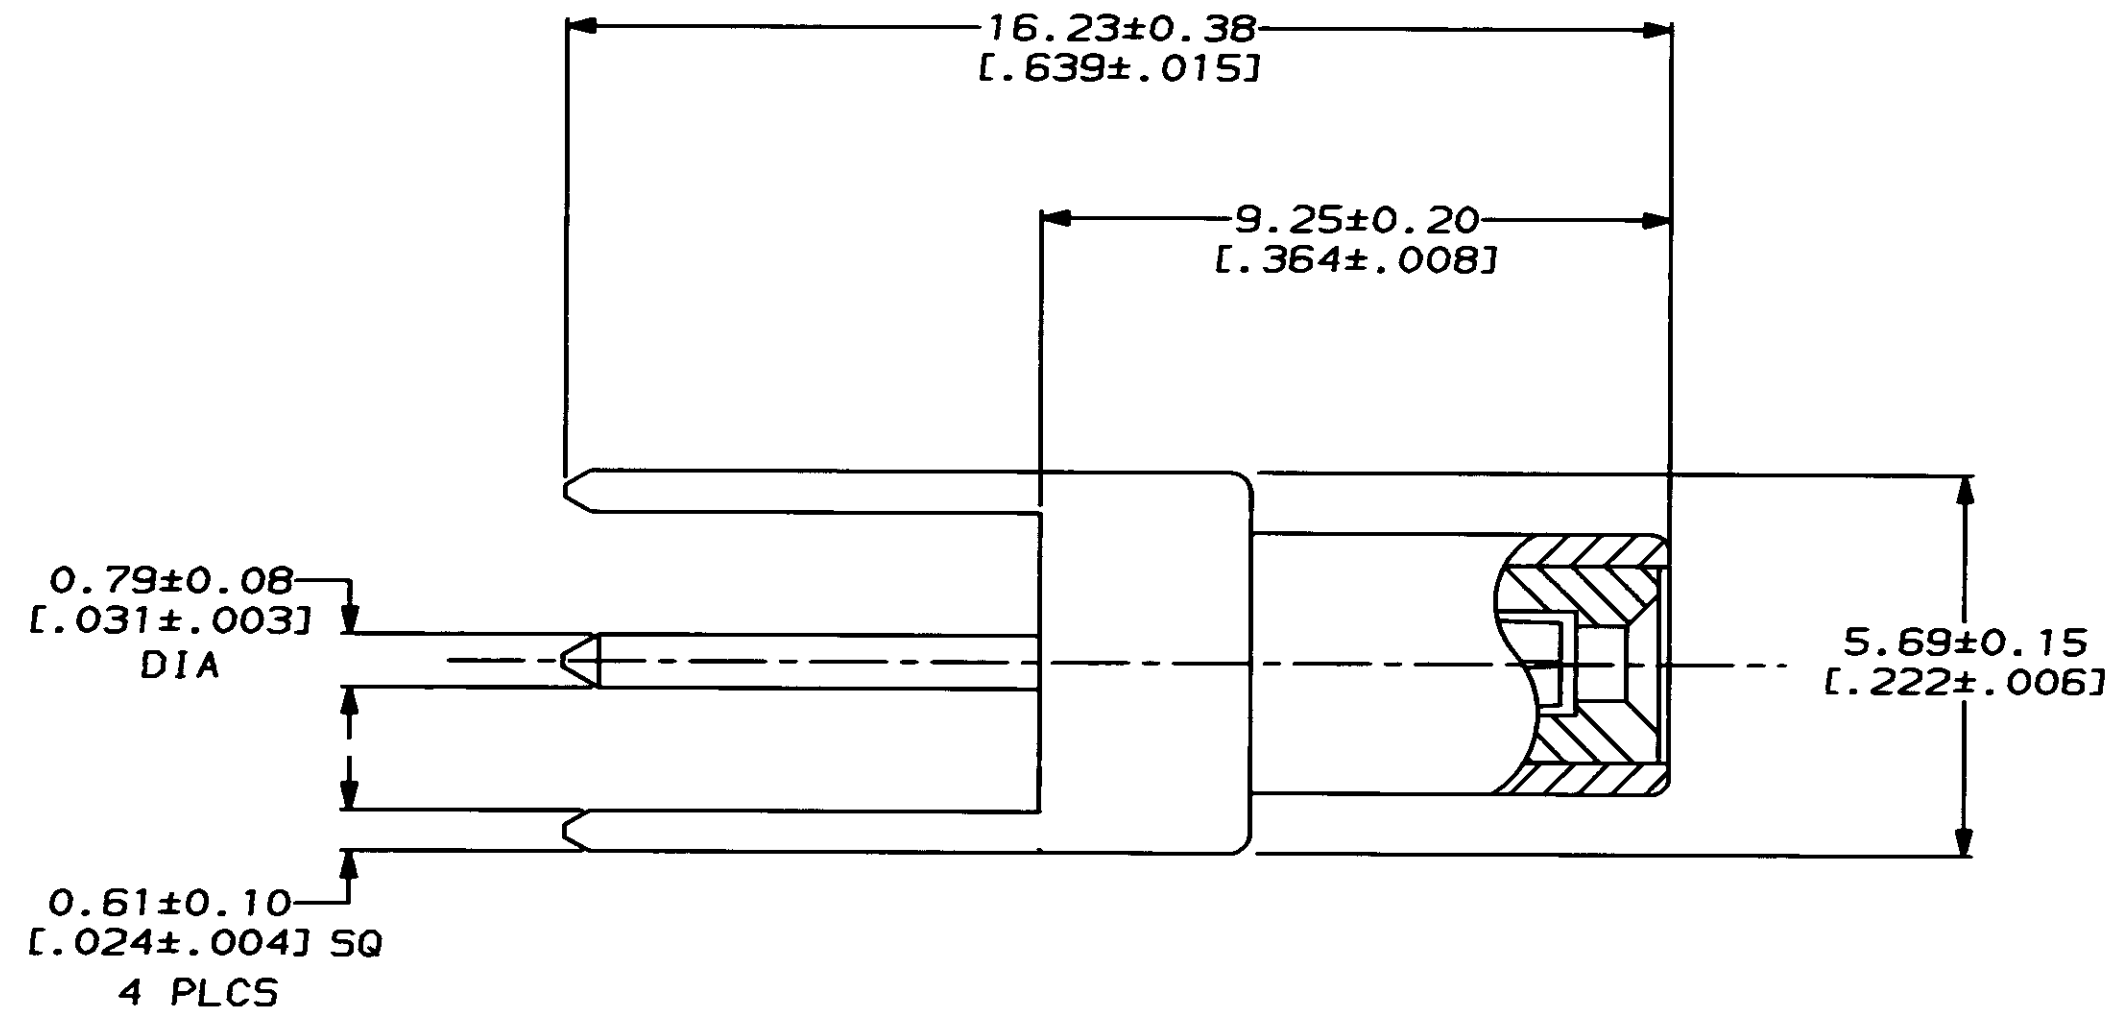

PCB CONFIGURATION

414509-1
 PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [INCHES]		DR 01/29/93 J.DAVIS		AMP Incorporated Harrisburg, PA 17105-3608		
TOLERANCES ON:		CHK 01/29/93 G.MICHAEL				
2 PLC DEC ± -		APPD 01/29/93 G.MICHAEL		NAME		
3 PLC DEC ± -		APPD 01/29/93 J.DAVIS		PIN, PCB, VERT, SIZE 8		
ANGLES ± -		PRODUCT SPEC				
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO
-		-		Ⓒ	00779	Ⓒ=414509
FINISH		WEIGHT		SCALE		SHEET
-		-		-		1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)