



LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DN	APVD
B		REVISED PER ECO-12-007810	28JUL12	KH	SM

- 1 UNIT ACCEPTS 1.14[.045] SQUARE OR ROUND POST.
- 2 UNIT ACCEPTS STANDARD SL-156 CONTACTS.
- 3 UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
- 4 IDENTIFICATION NUMBER FOR ALL POSITIONS, OR FOR POSITION 1 ONLY, WILL BE LOCATED AS SHOWN.
- 5 OPTIONAL CONSTRUCTION, BOTH ENDS.
- 6 DIMENSIONS IN BRACKETS ARE IN INCHES.

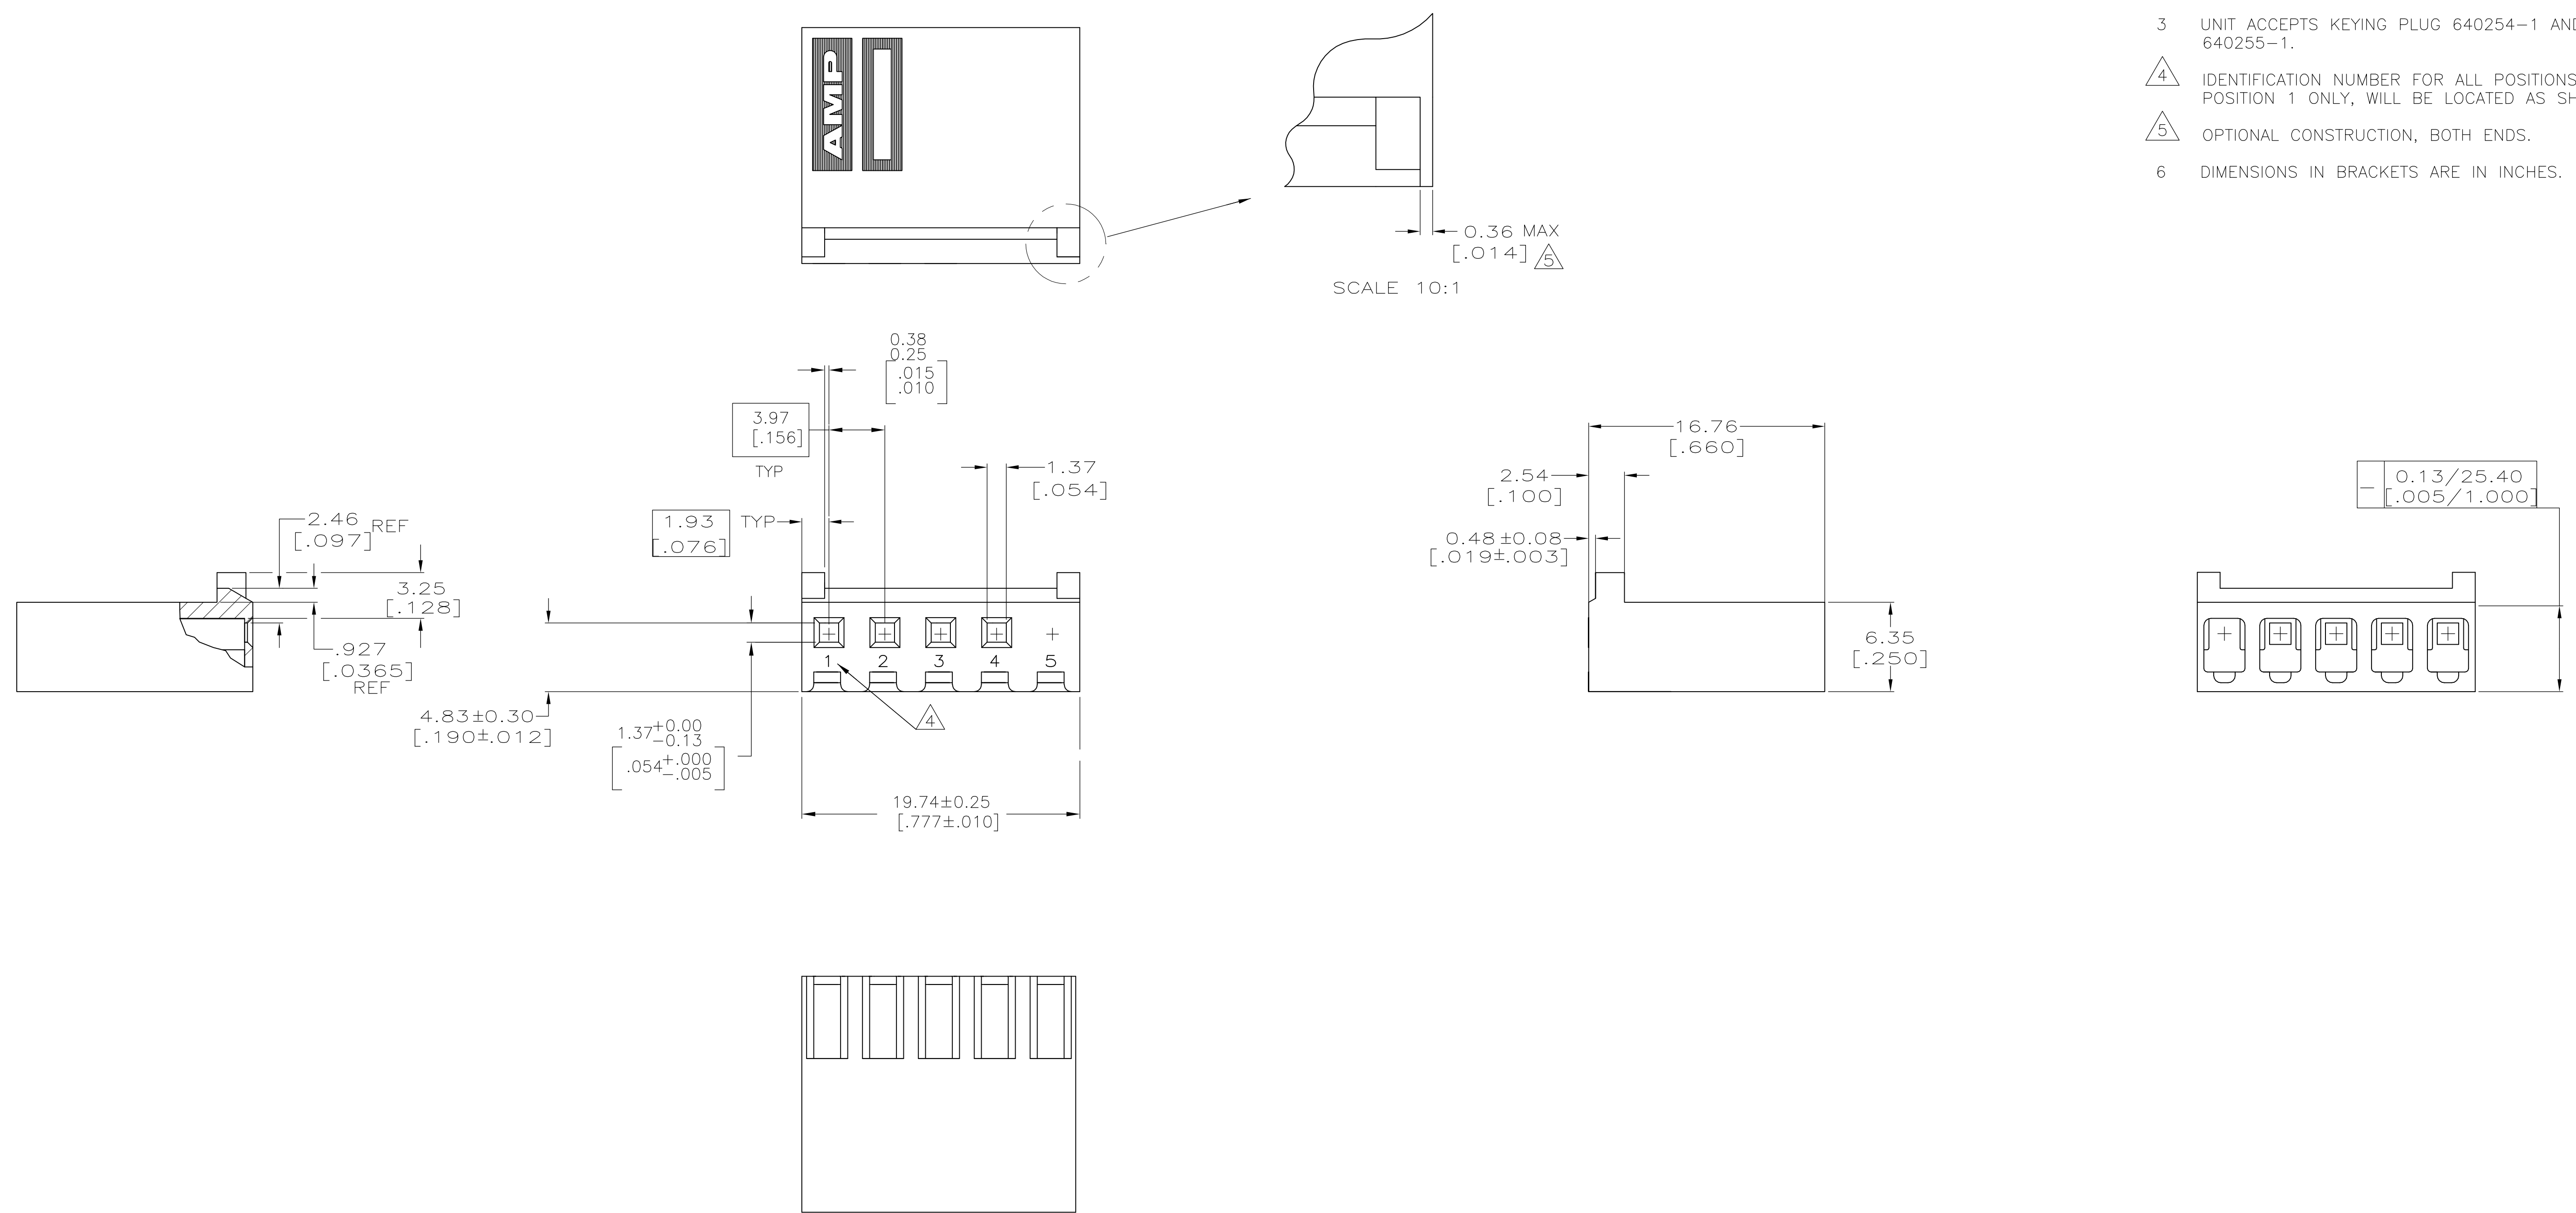

5	647346-5
NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K. WHITAKER 04NOV2005	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK D. ROSSI 04NOV2005	NAME HOUSING WITH LOCKING RAMP AND POLARIZING TABS, POSITION 5 BLOCKED, SL-156	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. ROSSI 04NOV2005	PRODUCT SPEC	
0. PLC	± -	APPLICATION SPEC		
1. PLC	± -	SIZE		
2. PLC	± -	CAGE CODE		
3. PLC	± 0.13 [.005]	DRAWING NO		
4. PLC	± -	RESTRICTED TO		
ANGLES	± -	WEIGHT		
MATERIAL NYLON,UL 94V-0	FINISH -	A1 00779 C=647346		
CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV B		

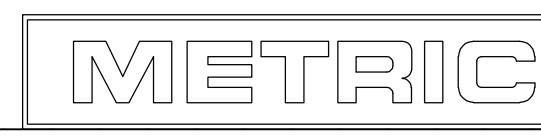

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)