


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		ECO-07-029740	20DEC2007	RB	MM

- 1 INSULATOR: THERMOPLASTIC POLYSTER, UL RATED 94V-0; COLOR-BLACK
- 2 CONTACT: TAPERED ENTRY BeCu, GOLD PLATE OF 20μ" MIN. OVER NICKEL PLATE OF 30μ" MIN.
- 3 SLEEVE: BRASS PLATE OF 180μ" MIN. OVER NICKEL PLATE OF 50μ" MIN.
- 4 DISTANCE FROM POLARIZATION END OF SOCKET TO CENTER OF FIRST HOLE IS TYPICALLY .150, EXCEPT FOR 20 POSITION SOCKET IS .250

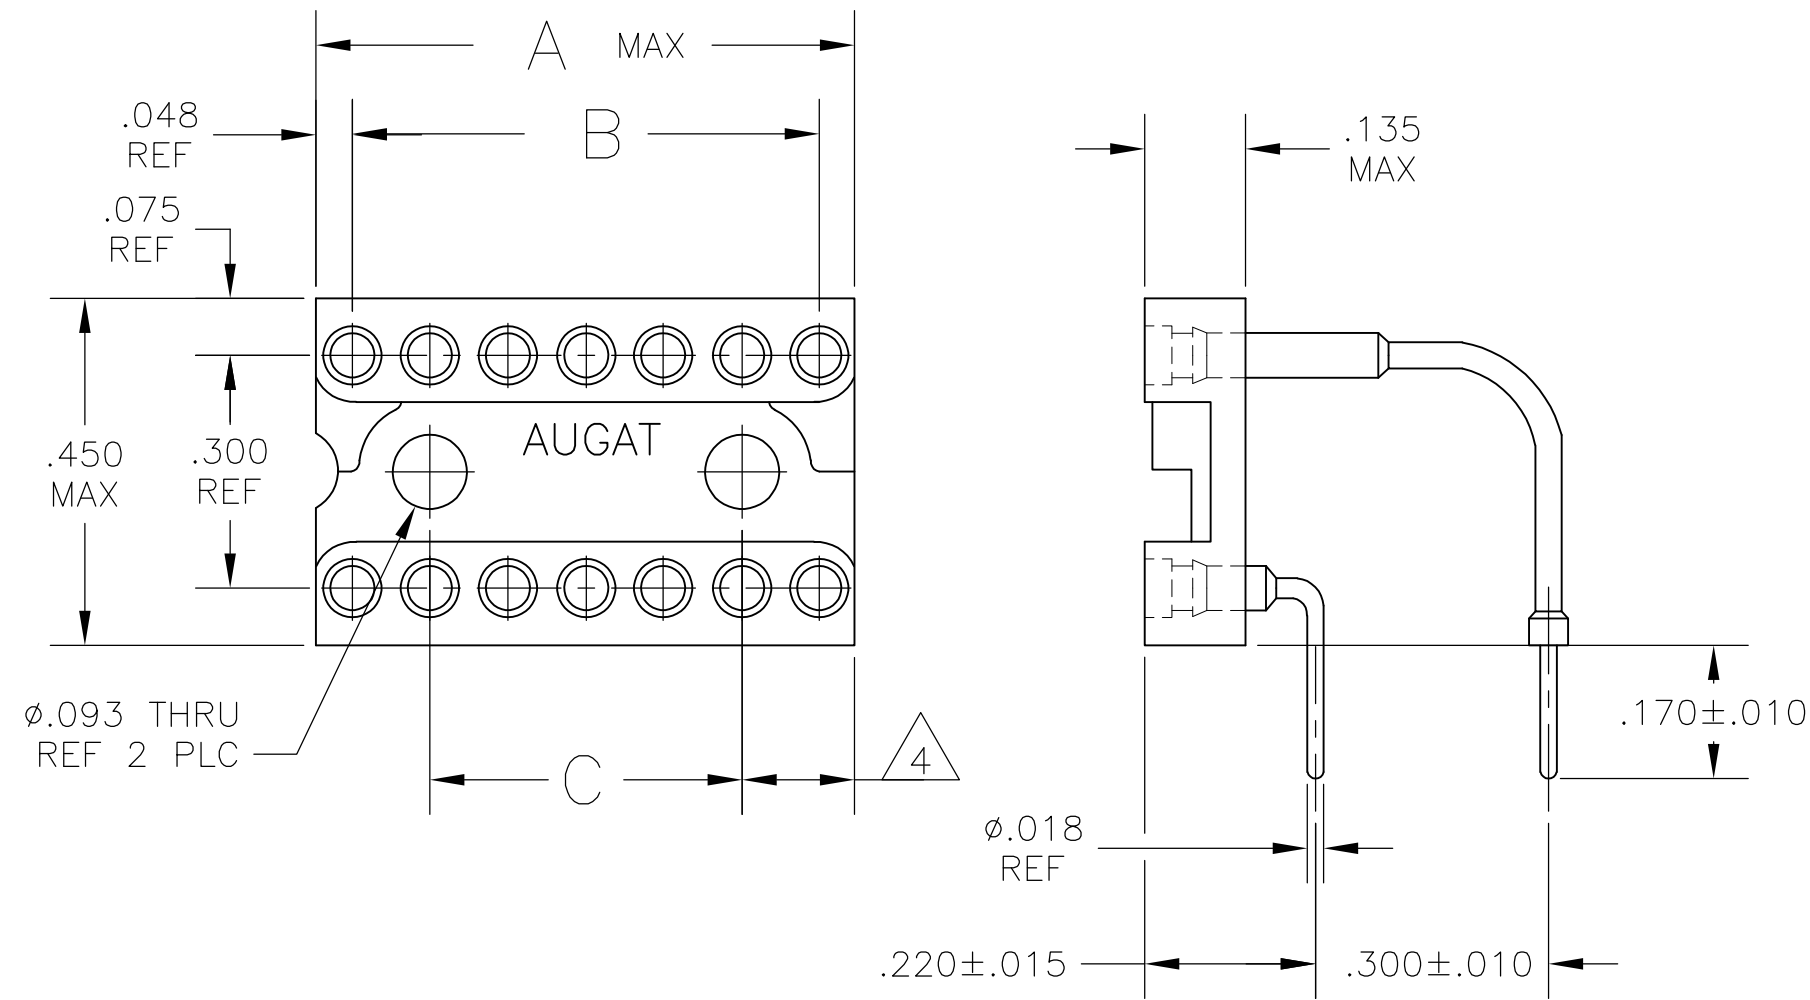

0.500	0.900	1.000	20	1977291-1
C REF	B	A MAX	POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 20DEC2007	Tyco Electronics Corporation Harrisburg, Pa 17105-3608				
DIMENSIONS: INCHES		CHK M MILLER 20DEC2007					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M MILLER 20DEC2007	NAME				
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	RIGHT ANGLE DIP				
MATERIAL SEE NOTES		FINISH SEE NOTES	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				A3	00779	C-1977291	-
CUSTOMER DRAWING			SCALE	SHEET	OF	REV	
			4:1	1	1	A	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)