

SPECIFICATION CONTROL DRAWING


44A7995

TITLE TWO CONDUCTOR THERMOCOUPLE EXTENSION CABLE
SHIELDED, JACKETED, LIGHTWEIGHT

Date 11-16-98

Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 44.

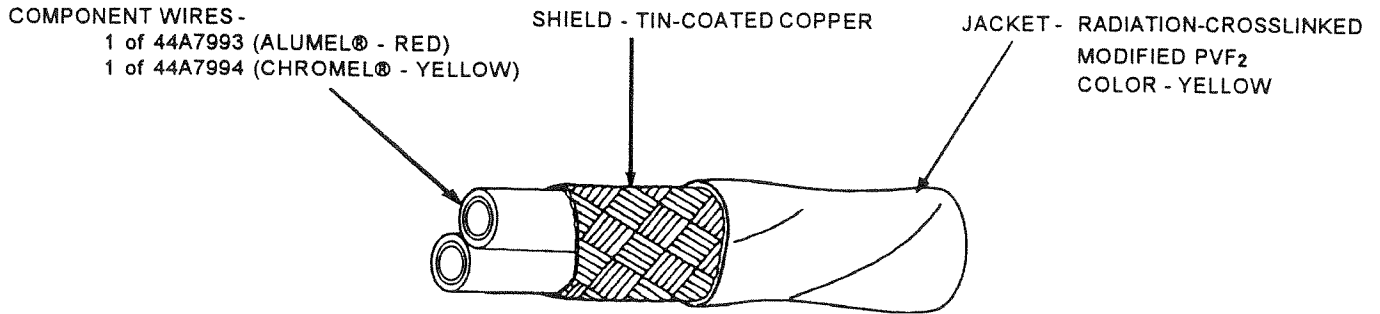

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inch)		OUTSIDE DIAMETER (inch)		NOMINAL WEIGHT (lb/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
44A7995-20	20	36	.006	.008	.133	.140	15.7

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature
ACCELERATED AGING: 300 ± 3°C for 6 hours
DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz, 1 minute
FLAMMABILITY: 30 seconds (maximum); 3 in. (maximum);
 no flaming of facial tissue
JACKET CONCENTRICITY: 70% (minimum)
JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 200% (minimum)
 Tensile Strength, 4000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1.5 kV (rms), 60 Hz, 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test
LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours
SHIELD COVERAGE: 85% (minimum)
VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

The combination of the above thermoelements is referred to as type KX per ANSI MC 96.1.

EMF shall be 4.00 mV (minimum), 4.19 mV (maximum) as 100°C with reference junction at 0°C, and shall be performed on every length of finished cable.

CHROMEL® and ALUMEL® are federally registered trademarks of Hoskins Manufacturing Company.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 1-800-2-Raychem Fax: 1-650-361-8297

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)