

SPECIFICATION CONTROL DRAWING

55A4836

TITLE THREE CONDUCTOR CABLE, JACKETED, NORMAL WEIGHT


Date 09-21-99

Revision D

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

COMPONENT WIRES - 55A0816

JACKET - RADIATION-CROSSLINKED, MODIFIED ETFE

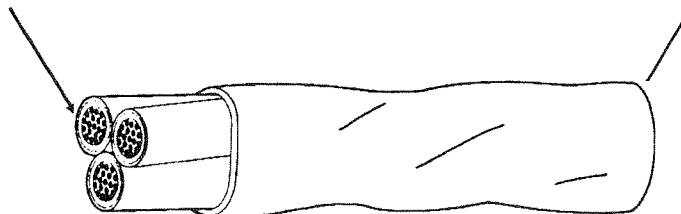

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lb/1000 ft)
		MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55A4836-26-*	26	.006	.008	.101	.107	7.3
55A4836-24-*	24	.006	.008	.112	.118	9.4
55A4836-22-*	22	.006	.008	.125	.131	12.8
55A4836-20-*	20	.006	.008	.142	.148	18.1
55A4836-18-*	18	.006	.008	.166	.173	26.4
55A4836-16-*	16	.006	.008	.183	.190	32.8

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

ACCELERATED AGING: 300 ± 3°C for 7 hours

BLOCKING: 200 ± 3°C for 6 hours

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

FLAMMABILITY:

Procedure 1, 3 seconds (maximum); 3 inch (maximum); no flaming or facial tissue

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

LIFE CYCLE: 230 ± 3°C for 500 hours

LOW TEMPERATURE-COLD BEND: -65 ± 3°C for 4 hours

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL): 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER

The *** in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 20, black, red and orange component wires; white jacket: 55A4836-20-0/2/3-9

NOTE: Nominal values are for information only.
Nominal values are not requirements

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Raychem

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)