

| | |
|-----------------|--------------|
| COIL: @ 25°C | |
| RESISTANCE | 75 OHMS ±10% |
| NOMINAL VOLTAGE | 12.0 VDC |
| MUST OPERATE | 6.5 VDC |
| MUST RELEASE | 0.9 VDC |

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 10 MS MAX.
CONTACT BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

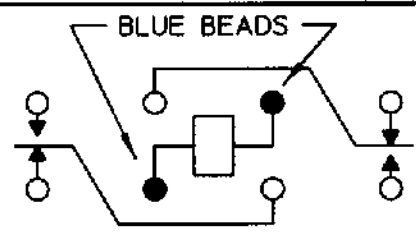

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. B.D. 6/16/99 CK. GQH 6-16-99



CUST. C. I. I. STD

CUST. NO. _____ REV. _____

07 RELAY

B07A112BB1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)