

REV. 0

DCO 16185


COIL: @ 25°C	RESISTANCE	10000 OHMS ±20%
NOMINAL VOLTAGE		94.0 - 114.0 VDC
MUST OPERATE		63.0 VDC
MUST RELEASE		39.5 VDC MAX., 12.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 30 g's  
 SHOCK 100 g's 11 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 5 MS MAX.  
RELEASE 4 MS MAX.  
CONTACT BOUNCE 2.5 MS MAX.

CUSTOMER DATA SHEET

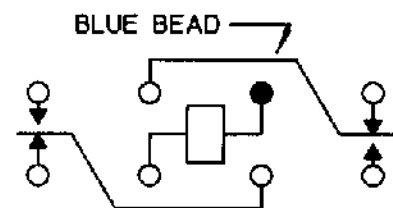

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2 AMPS  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 3/23/00

CK. 3/23/00



COMMUNICATIONS  
 INSTRUMENTS, INC.

CUST. GENICOM  
 CUST. NO. 3SAF5002T1 REV. \_\_\_\_\_

'FW' RELAY

FW1101S06

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)