
### SPECIFICATION CONTROL DRAWING

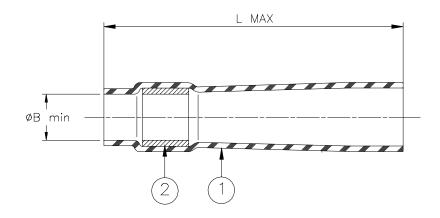

Product Revision		Product Dimensions		
Product Name		øB	L	
		min	max	
D-110-0091	В	4.3	17.0	
		(0.170)	(0.670)	

#### **MATERIALS**

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. SOLDER PREFORM WITH FLUX:

SOLDER: TYPE Sn63 per ANSI-J-STD-006. FLUX: TYPE ROL1 per ANSI-J-STD-004.

## APPLICATION

- 1. This sleeve is designed to terminate the shield of Raychem coax, EPD 5886 to a circular turret assembly.
- 2. Temperature range: -55°C to +150°C.

<sup>\*</sup> A trademark of Raychem Corporation.

Raychem THERMOFIT DEVICES			300 Cons	Corporation titution Drive ark, CA 94025	SOLDERSLEEVE* SHIELD TERMINATOR				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.					DOCUMENT NO: D-110-0091				
0.00 N/A 0.0 N/A R	drawing at		reserves the right to amend this at any time. Users should evaluate bility of the product for their on.		DCR NUMBER: D980917		REPLACES: D1100091		
DRAWN BY: DATE: M. FORONDA 07/24/9		8	PROD. REV. SEE TABLE	DOC ISSUE:	SCALE: None	SIZE:	SHEET: 1 of 1		

If this document is printed it becomes uncontrolled. Check for the latest revision.

## 单击下面可查看定价,库存,交付和生命周期等信息

# >>TE Connectivity(泰科)