
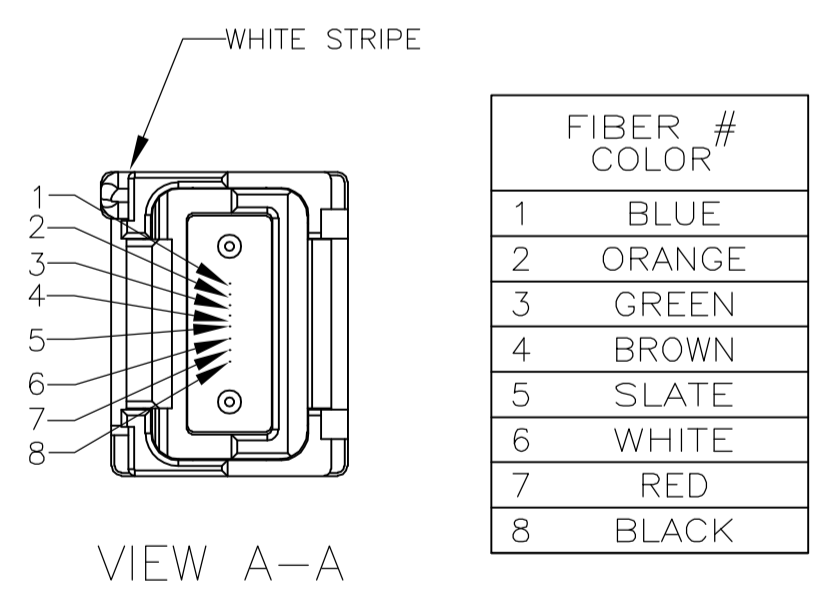


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	A	NEW RELEASE	02FEB06	JWD JD

1. MAXIMUM INSERTION LOSS: 1.0 dB (1310nm)
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

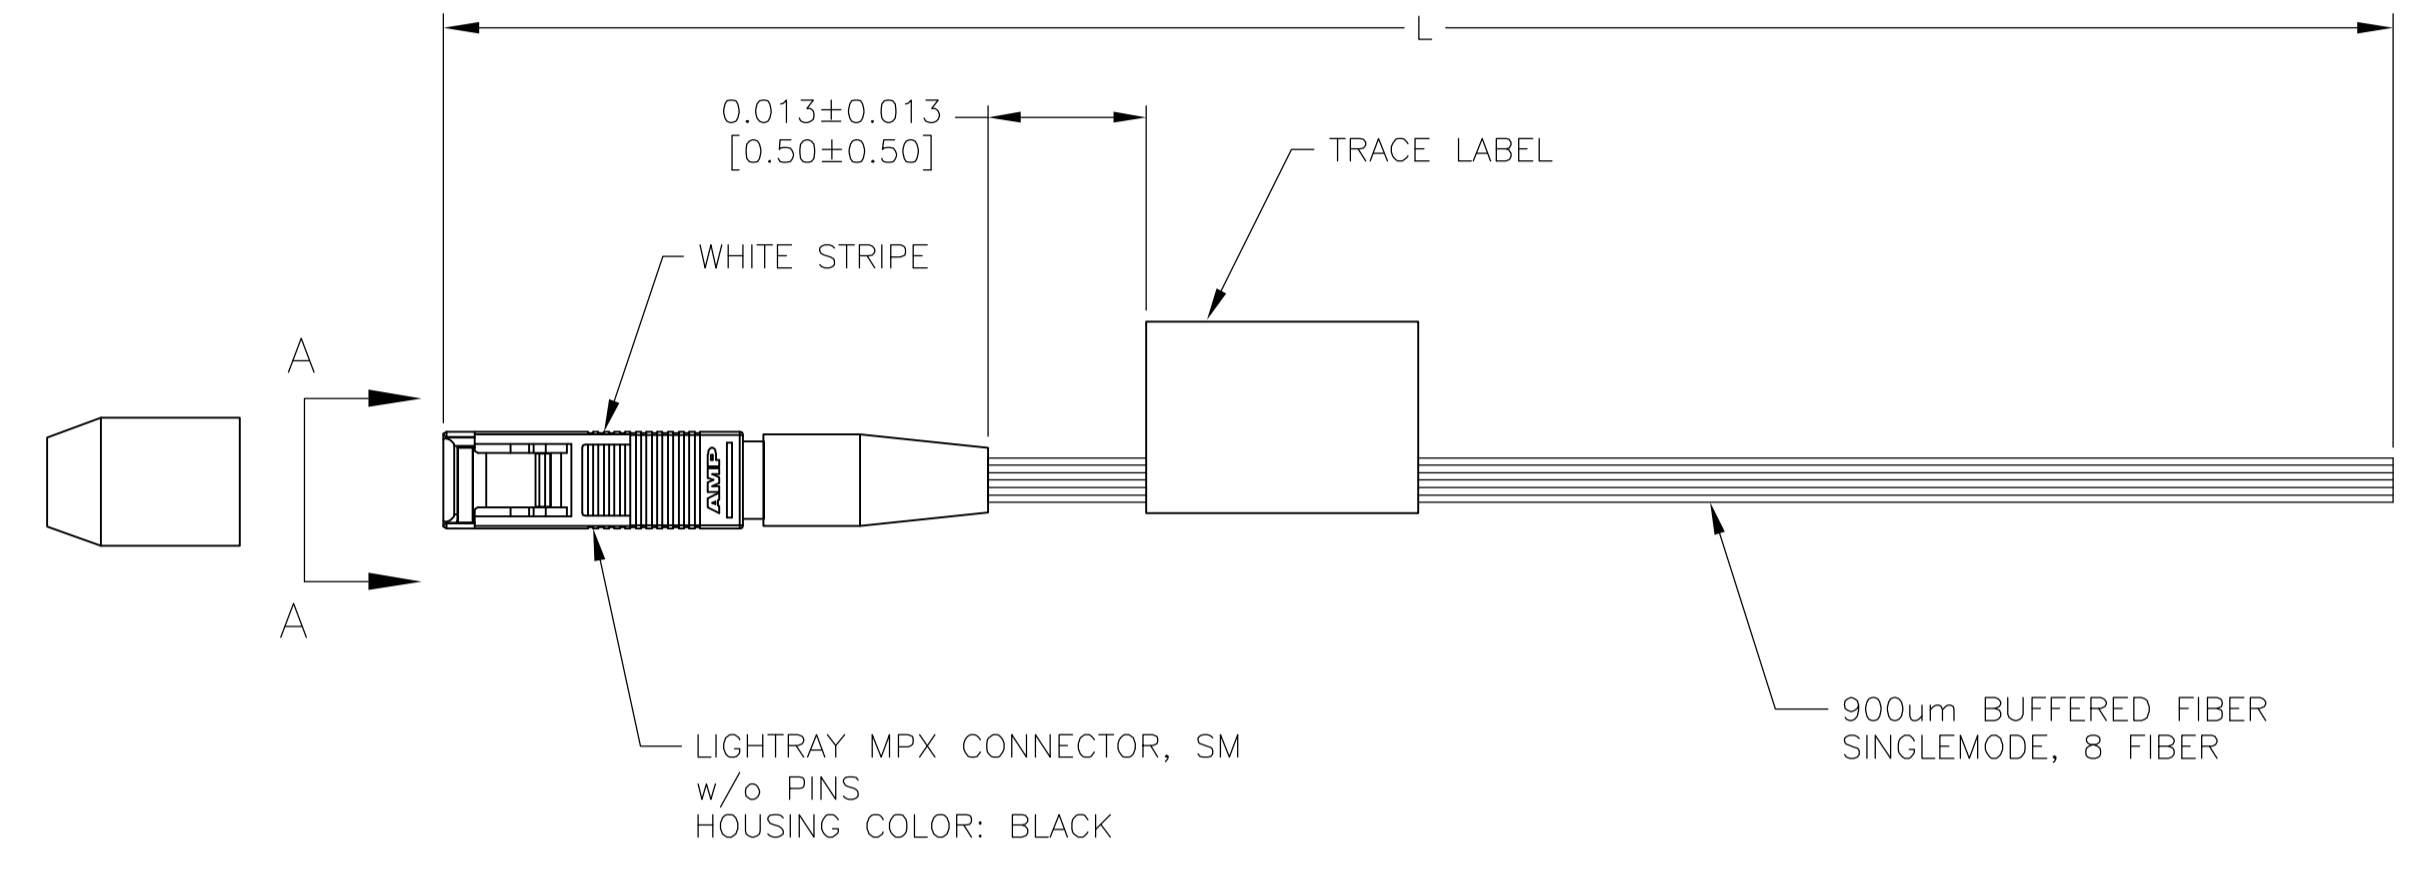

VIEW A-A
 LIGHTRAY MPX CONNECTOR FIBER PATH

0.480±0.030 [18.9±1.2]	6374537-3
2.000±0.051 [78.7±2.0]	6374537-2
1.000±0.051 [39.4±2.0]	6374537-1
L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.W.DAVIS 02FEB06	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 02FEB06	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.McCORKEL 02FEB06	NAME PIGTAIL, FIBER OPTIC, SINGLEMODE, (8) 900um BUFFERED FIBER CABLE LIGHTRAY MPX, NO PINS
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± ± - FINISH -		PRODUCT SPEC -	RESTRICTED TO -
MATERIAL -		WEIGHT -	SIZE A2
CUSTOMER DRAWING		CAGE CODE 00779	DRAWING NO 6374537
SCALE NTS		SHEET 1 OF 1	REV A

6374537

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)