

SPECIFICATION CONTROL DRAWING


55PC6021

TITLE TWO CONDUCTOR CABLE, DOUBLE SHIELDED, JACKETED, GENERAL PURPOSE, 600 VOLT

Date
6-6-13

Revision
C

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

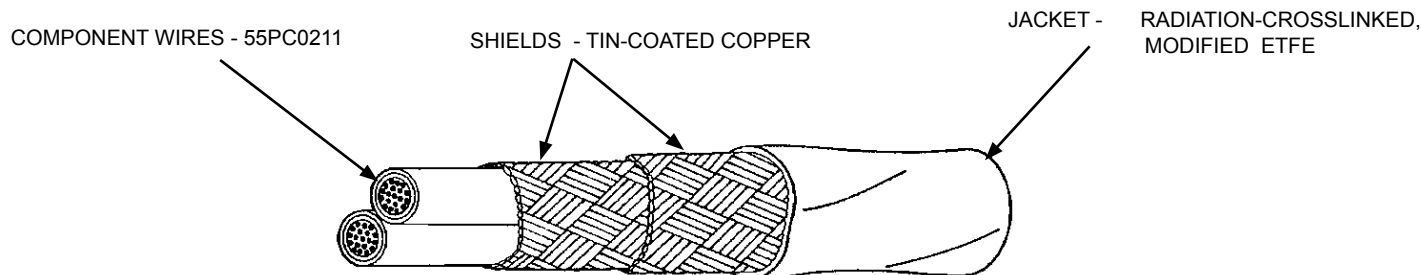

CABLE CONSTRUCTION DETAILS

| PART NUMBER <i>1/</i> | CONDUCTOR SIZE (AWG) | INNER SHIELD SIZE (AWG) | OUTER SHIELD SIZE (AWG) | JACKET THICKNESS (in.) | | OUTSIDE DIAMETER (in.) | | | WEIGHT (lbs/1000 ft.) | |
|--------------------------|----------------------|-------------------------|-------------------------|--------------------------|-------------|--------------------------|--------------|------------------|-------------------------|------------------|
| | | | | LOWER SPEC LIMIT | TARGET WALL | LOWER SPEC LIMIT | TARGET VALUE | UPPER SPEC LIMIT | TARGET VALUE | UPPER SPEC LIMIT |
| 55PC6021-24-* | 24 | 36 | 38 | .0055 | .0070 | .129 | .133 | .137 | 17.98 | 18.57 |
| 55PC6021-22-* | 22 | 36 | 38 | .0055 | .0070 | .140 | .145 | .150 | 21.71 | 22.34 |
| 55PC6021-20-* | 20 | 36 | 38 | .0055 | .0070 | .157 | .162 | .167 | 25.92 | 26.59 |
| 55PC6021-18-* | 18 | 38 | 38 | .0060 | .0075 | .173 | .177 | .182 | 32.29 | 33.13 |
| 55PC6021-16-* | 16 | 38 | 38 | .0060 | .0075 | .188 | .192 | .197 | 33.98 | 34.87 |
| 55PC6021-14-* | 14 | 38 | 38 | .0060 | .0080 | .218 | .223 | .228 | 49.59 | 50.72 |
| 55PC6021-12-* | 12 | 38 | 38 | .0060 | .0080 | .256 | .261 | .267 | 64.14 | 65.58 |
| 55PC6021-10-* | 10 | 36 | 36 | .0070 | .0090 | .311 | .320 | .329 | 99.52 | 101.94 |

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.
Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

Raychem, TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Page 1 of 2



Raychem Wire & Cable
501 Oakside Avenue
Redwood City, CA 94063-3800
Phone: 1-800-227-8816
Fax: 1-650-361-6297

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms)

Impulse Dielectric Test, 6.0 kV (peak)

SHIELD COVERAGE: 85% (minimum) (each)

SHIELD RESISTANCE (Finished Cable): 12 milliohms/meter (maximum)

VOLTAGE WITHSTAND (Post Environmental): 1000 volts (rms), 60 Hz, 1 minute

CABLE IDENTIFICATION: Mark outer jacket surface in a contrasting color at 12 inch (nominal) intervals as follows: " 55PC6021-AWG ** "

** = Applicable Manufacturer CAGE code as follows:

06090 = Menlo Park, CA

SU473 = Tijuana, MX

PART NUMBER:

The "*" in the part numbers on page 1 shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

1/ Example: AWG 22, red and blue component wires; white jacket:
55PC6021-22-2/6-9

1/ See footer section on page 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)