


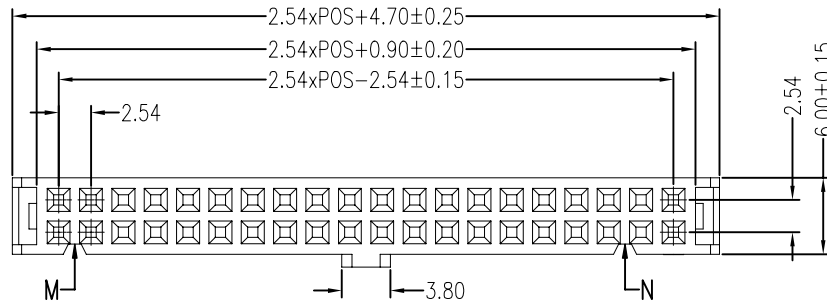





REVISIONS				
P	LFR	DESCRIPTION	DATE	DRN / APVD
A2		ECR-20-016651	03DEC2020	F.F / M.S



**NOTES:**  
**Material:**  
 Contact Material: Phosphor Bronze  
 Insulator Material: See product family table  
**Plating:**  
 3u" Gold on contact area  
 all contact with 50u" Min Nickel underplating  
**Function requirement:**  
 Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

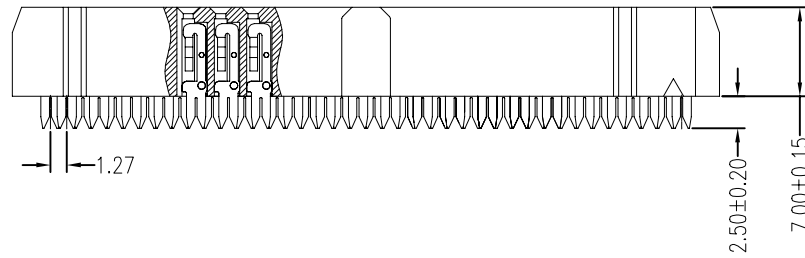

6P Without Slot "M" and "N"  
 8P-12P With Slot "M", Without Slot "N"  
 14P-64P With Slot "M" and "N"

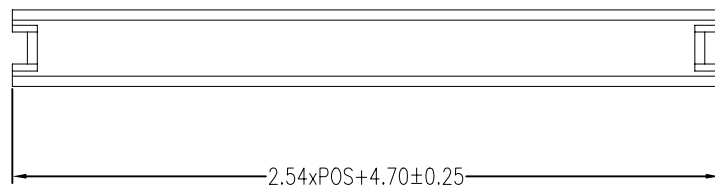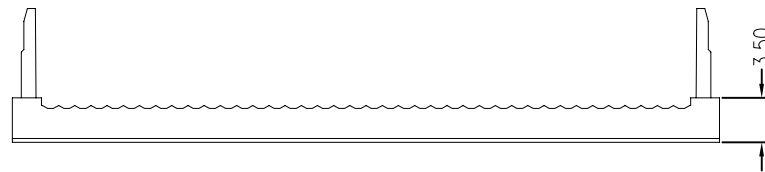

				64	32	6-2271035-4
				60	30	6-2271035-0
				50	25	5-2271035-0
				44	22	4-2271035-4
				40	20	4-2271035-0
				36	18	3-2271035-6
				34	17	3-2271035-4
				30	15	3-2271035-0
				26	13	2-2271035-6
				24	12	2-2271035-4
				22	11	2-2271035-2
				20	10	2-2271035-0
				18	9	1-2271035-8
				16	8	1-2271035-6
				14	7	1-2271035-4
				12	6	1-2271035-2
				10	5	1-2271035-0
				8	4	2271035-8
				6	3	2271035-6
TRAY		PBT+30%GF UL94V-0 BK		6	3	2271035-6
PACKAGING	INSULATING MATERIAL		No. of Pins	POS	PN	

PRODUCT FAMILY TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	FRANK FAN	03DEC2020		TE Connectivity		
DIMENSIONS: mm		CHK	GEORGE FU	03DEC2020		NAME	AMP-LOCK IDC SOCKET	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	MING SHI	03DEC2020		PRODUCT SPEC	108-137371	
0 PLC ± -	1 PLC ± 0.30	APPLICATION SPEC			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± 0.25	3 PLC ± -				A2	00779	2271035	
4 PLC ± -	ANGLES ± -	WEIGHT			SCALE		SHEET	REV
					1:1		1 of 1	A2
MATERIAL	FINISH	CUSTOMER DRAWING						

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)