
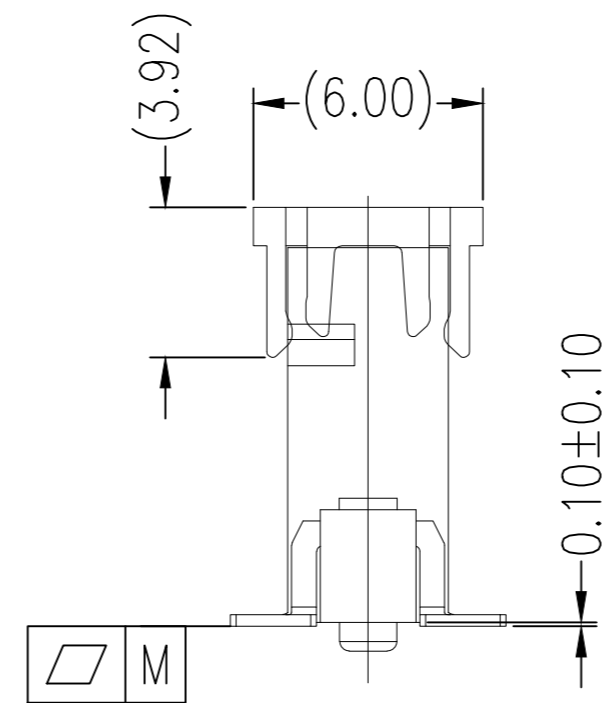
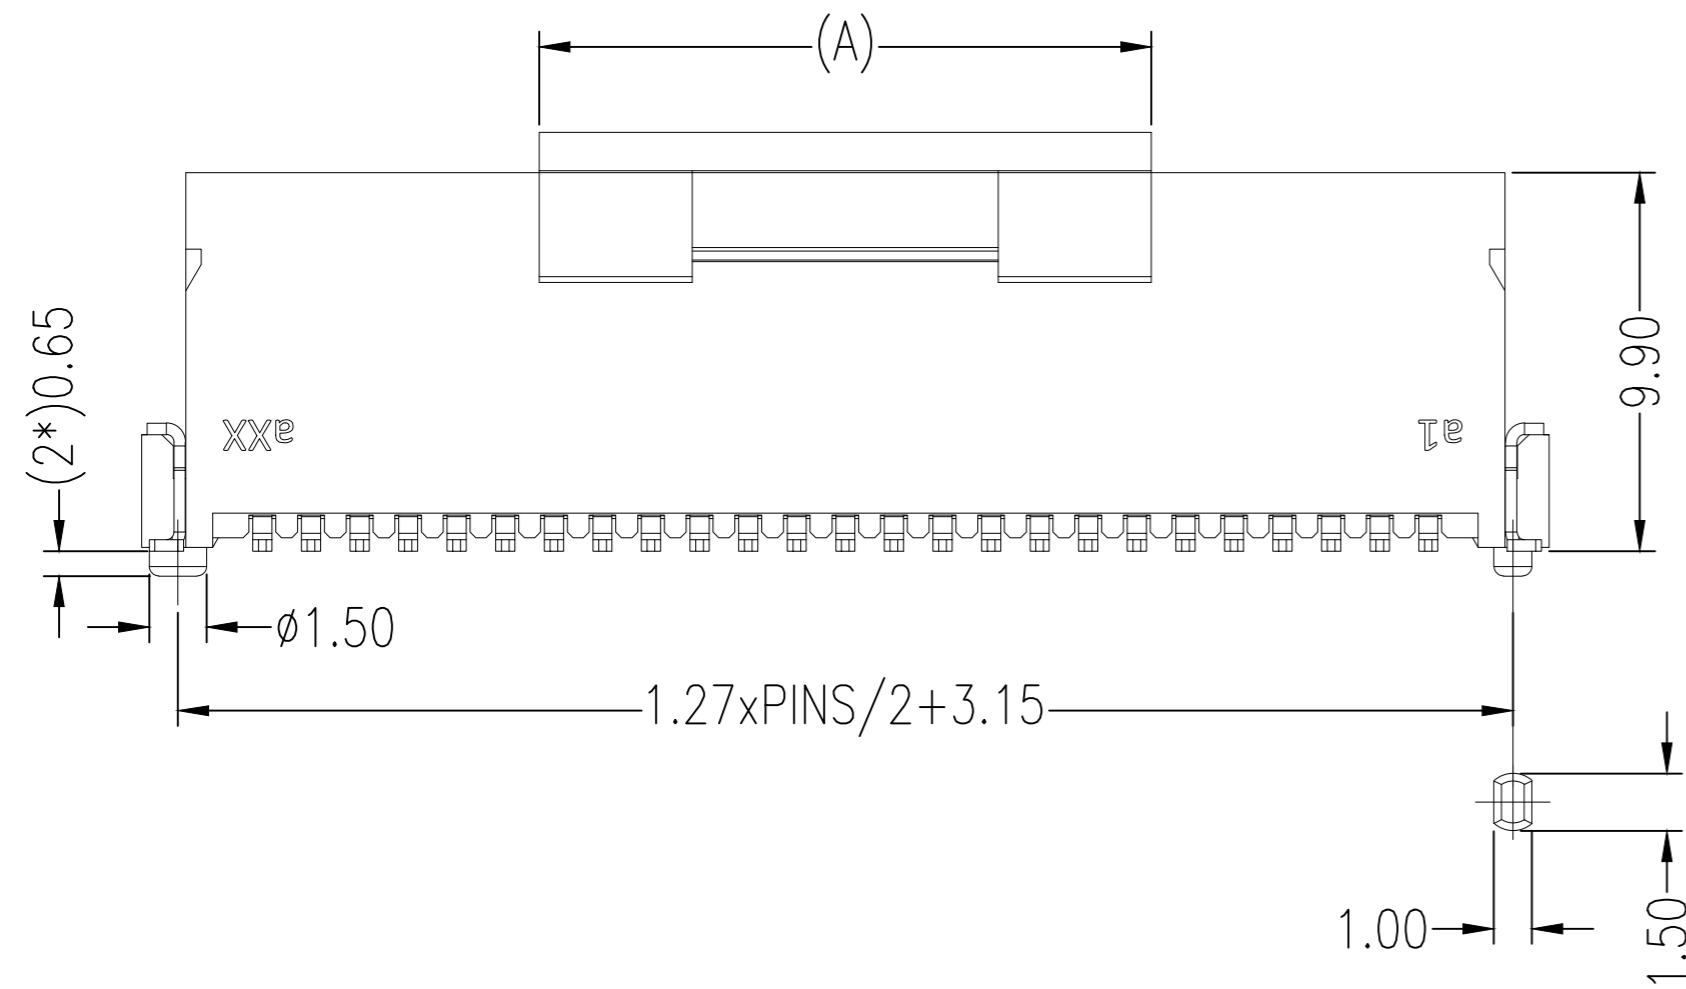


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - TE Connectivity Ltd. ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
B		ECR-19-006646	25APR2019	Z.W S.M


- NOTES:
- 1,Current Rating: 1.0AMP
  - 2,Contact Resistance: 25mΩ Max
  - 3,Withstand Voltage: 500V AC/DC
  - 4,Insulation Resistance: 10000MΩ Min
  - 5,Operation Temperature: -55°C to +125°C
  - 6,Contact Material: Copper alloy
  - 7,Contact Plating:  
Gold on contact area,  
Tin on soldering area,  
Nickel underplating overall.
  - 8,Insulator Material:  
High Temperature Plastic, UL94V-0, BK
- Recommended soldering process:  
IR Soldering,Peak temperature:260°C,5s

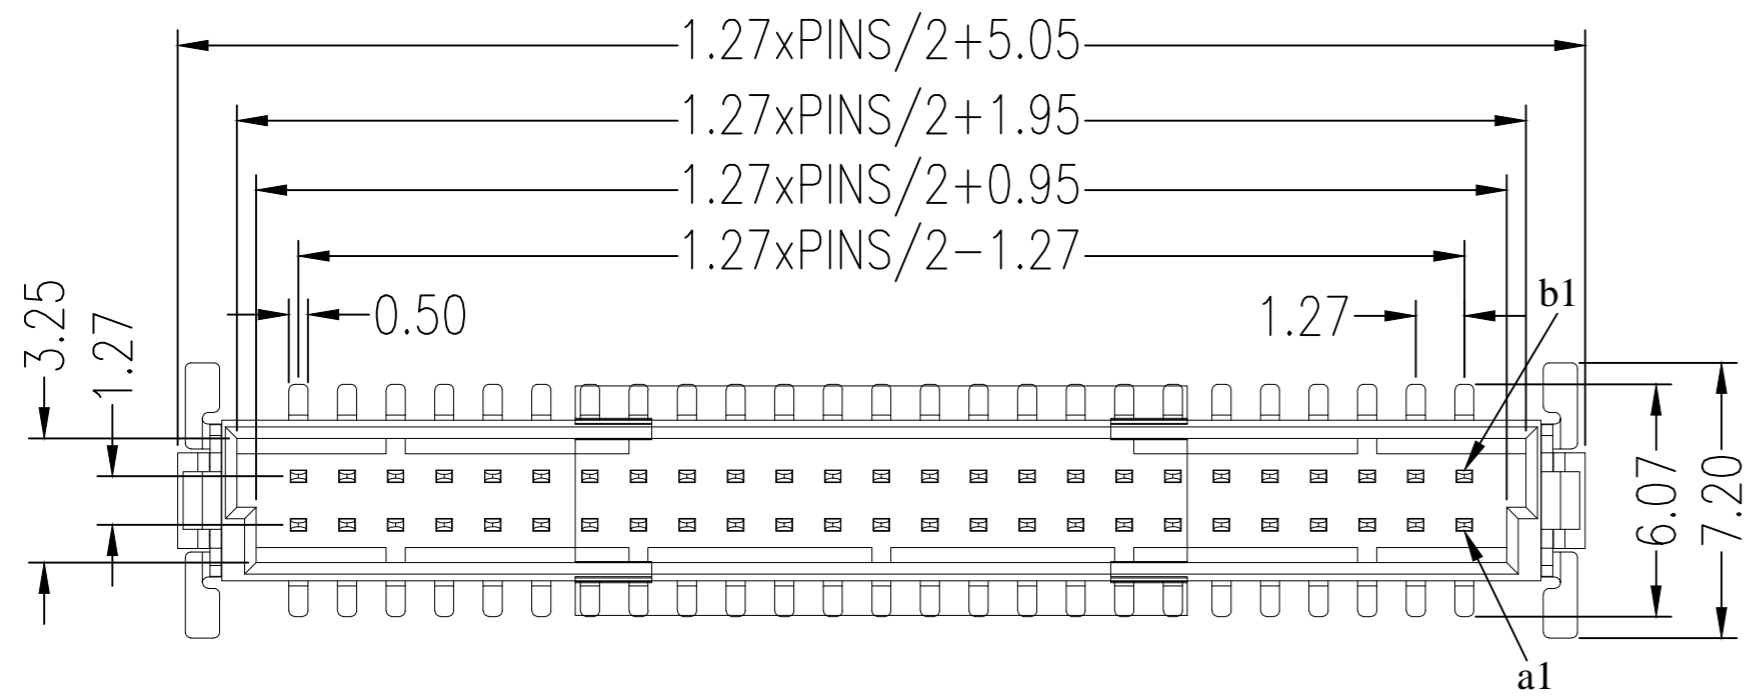

PINS	M
10~40PIN	0.12
42~100PIN	0.15

16.0	REEL	80	8-2271945-0
	REEL	68	6-2271945-8
	REEL	50	5-2271945-0
	REEL	40	4-2271945-0
	REEL	32	3-2271945-2
	REEL	26	2-2271945-6
7.0	REEL	20	2-2271945-0
	REEL	16	1-2271945-6
	REEL	12	1-2271945-2
	REEL	10	1-2271945-0
DIM A	PACKING	PINS	PN

PRODUCT FAMILY TABLE

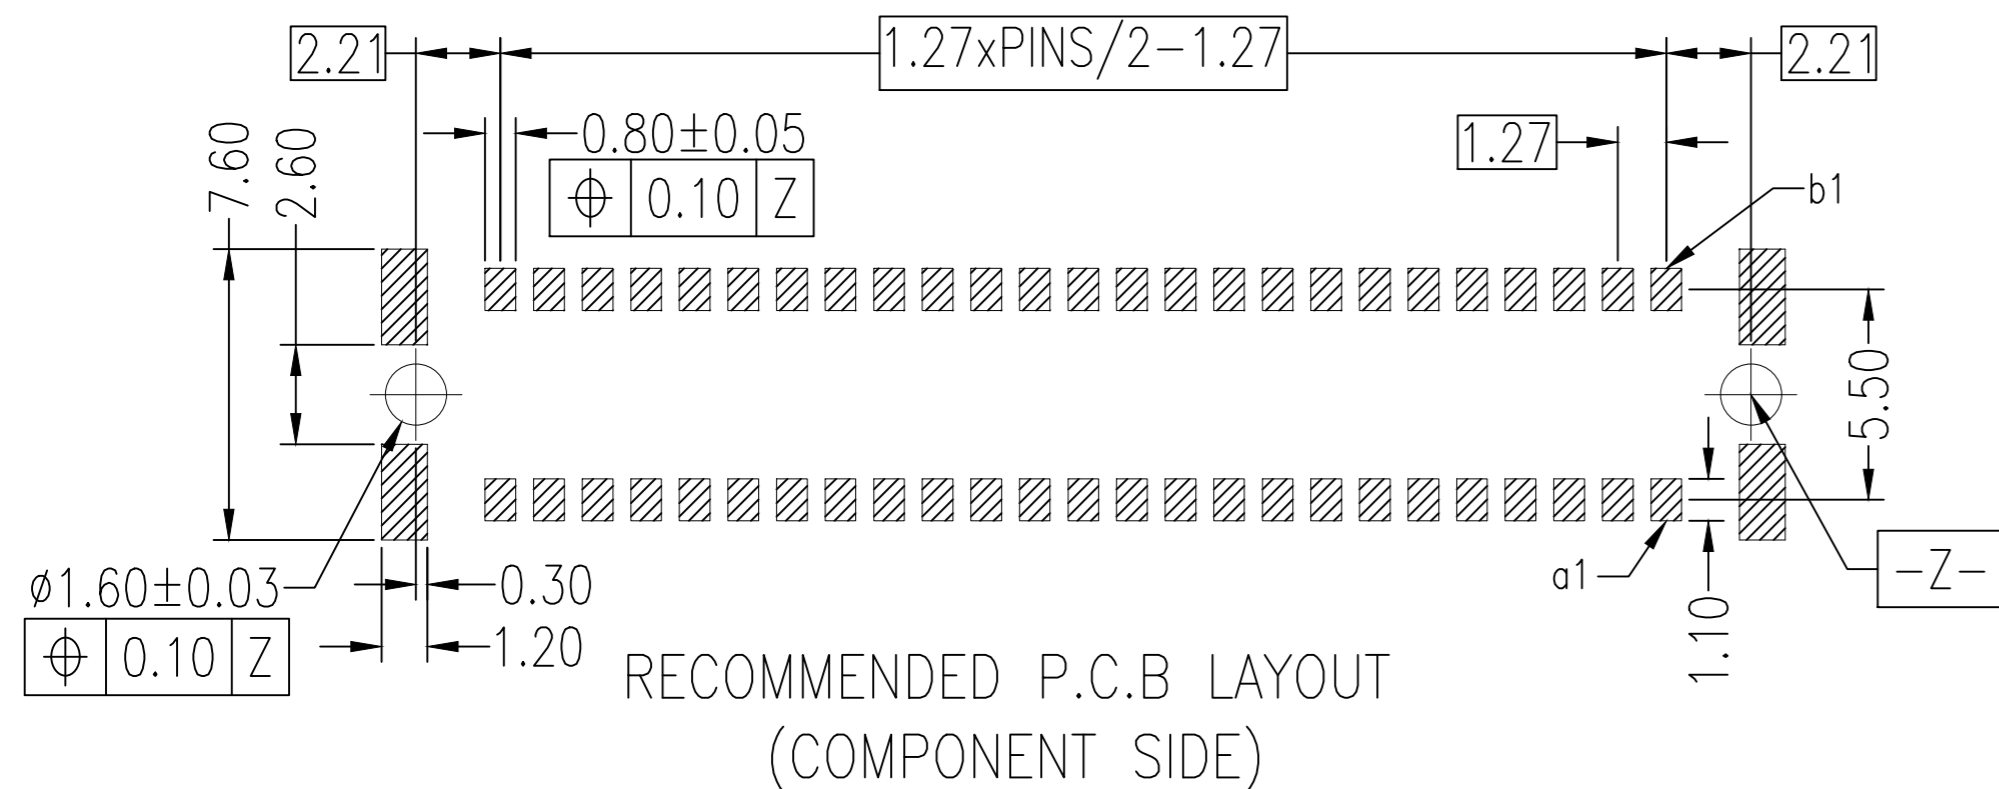

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		O4APR2018	
mm		0 PLC	± 0.5	GEORGE FU		CHK		O4APR2018	
		1 PLC	± 0.3	GEORGE FU		APVD		O4APR2018	
		2 PLC	± 0.3	SHI MING		PRODUCT SPEC		NAME	
		3 PLC	± -	APPLICATION SPEC		-		1.27MM PITCH, MALE VIOLA SMT CONN	
		4 PLC	± -	WEIGHT		-		9.90H, VERTICAL	
		ANGLES	± -	MATERIAL		-		SIZE	
		FINISH	-	WEIGHT		-		CAGE CODE	
-		-	-	CUSTOMER DRAWING		SCALE		1:1	
-		-	-	-		SHEET		1 of 1	
-		-	-	-		REV		B	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)