


GAGE DIMENSIONS APPLY WHEN TOOL IS
 BOTTOMED BUT NOT UNDER PRESSURE.
 FOR REPLACEMENT OF PARTS OTHER THAN
 LISTED, TOOL SHOULD BE RETURNED TO OUR
 FACTORY TO INSURE PROPER CERTI-CRIMP
 ADJUSTMENT.

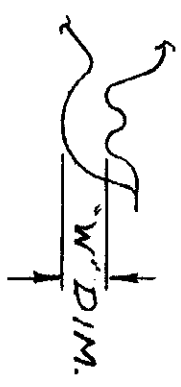

"W" DIM.	NO. 60
.054	.060

REV	DESCRIPTION	BY	CHK	DATE
F	REVISED	BS.		7/16/64
E	REVISED	RWS	CM	4-18-65
D	REVISED	CH	CM	3-27
C	REVISED	BY	CM	5-26-62

NUMBER 49975

DESCRIPTION	REQUIRED PER ASSEMBLY
49975	

QTY	DESCRIPTION	REMARKS	REV
2	21045-6 RING - RETAINING		6
1	300449 PIN - RETAINING		5
1	39364 SPRING		4
1	39366 COLLAR		3
2	300432 PIN - RETAINING		2
4	21045-3 RING - RETAINING		1

DR. J. J. [Signature]	14-23-63
CHK. [Signature]	6-13-62
APP. [Signature]	6-13-62

MATERIAL AND FINISH

WIRE - RANGE - INSULATION 16-14 1

TOLERANCE EXCEPT SCALE 1/2

CLASS TYPE "W" FLAG 1

LOC NO. M B 49975

REV F

CUSTOMER COPY REFERENCE ONLY

AMP INCORPORATED HARRISBURG, PENNA.

HAND TOOL ASSEMBLY

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)