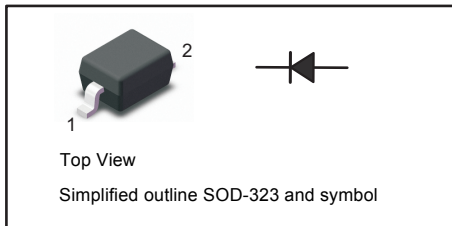


**PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode


**Features**

- ◆ Small surface mounting type
- ◆ High reliability

**Applications**

- ◆ Low current rectification

**Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )**

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	$V_{RM}$	45	V
Reverse Voltage	$V_R$	40	V
Mean Rectifying Current	$I_O$	0.1	A
Peak Forward Surge Current (60 Hz for 1 Cyc.)	$I_{FSM}$	1	A
Junction Temperature	$T_j$	125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 40 to + 125	$^\circ\text{C}$

**Characteristics at  $T_a = 25\text{ }^\circ\text{C}$** 

Parameter	Symbol	Typ.	Max.	Unit
Forward Voltage at $I_F = 100\text{ mA}$ at $I_F = 10\text{ mA}$	$V_F$	-	0.55	V
	$V_F$	-	0.34	V
Reverse Current at $V_R = 10\text{ V}$	$I_R$	-	30	$\mu\text{A}$
Capacitance Between Terminals at $V_R = 10\text{ V}$ , $f = 1\text{ MHz}$	$C_T$	6	-	pF

Note: ESD sensitive product handling required.

Typical Characteristics

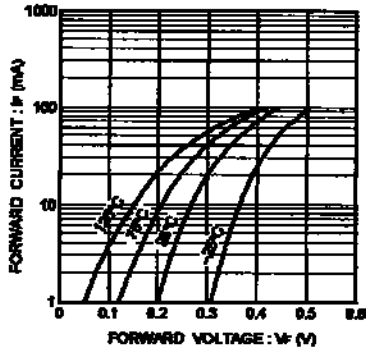


Fig. 1 Forward characteristics

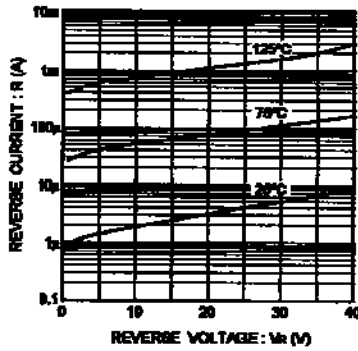


Fig. 2 Reverse characteristics

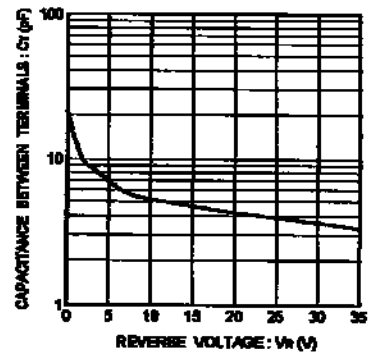


Fig. 3 Capacitance between terminals characteristics


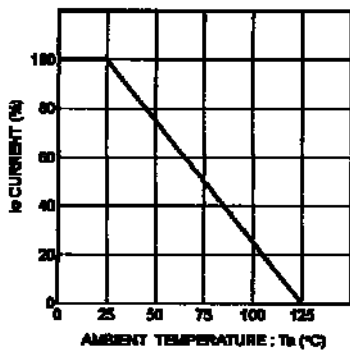


Fig. 4 Derating curve (mounting on glass epoxy PCBs)


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-323

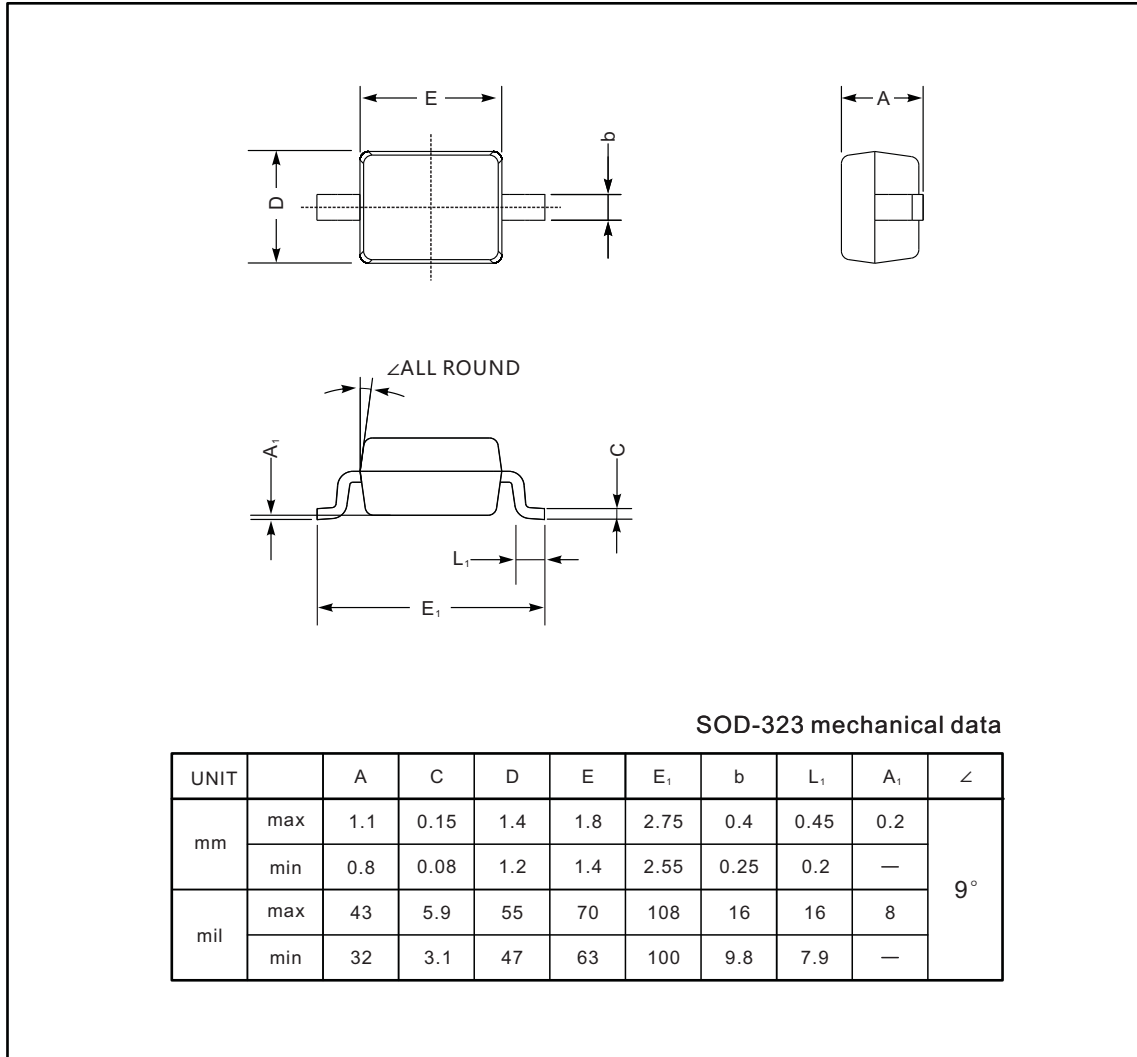

The recommended mounting pad size

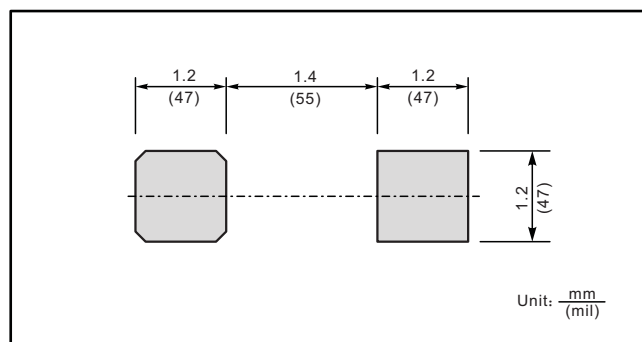

单击下面可查看定价，库存，交付和生命周期等信息

[>>TWGMC\(台湾迪嘉\)](#)