


SMD kHz Crystals

3.2 x 1.5 x 0.75 mm AH Series

Automotive Application Series

Features

- 2 pads surface mount package.
- High reliable environmental performance.
- RoHS compliant /Pb Free.
- AECQ200 Certified for automotive RTC applications.




Electrical Specifications

Item / Type	AH
Norminal Frequency	32.768 kHz
Frequency Tolerance(at 25 °C)	± 20 ppm , or specify
Operation Temperature Range	- 40 ~ + 125 °C
Shunt Capacitance (C0)	1.0 pF typical
Motional Capacitance (C1)	3.4 fF typical
Insulation Resistance (IR)	500 MΩ Min.
Drive Level (DL)	0.5 μW Max.
Load Capacitance(CL)	7.0 pF , 9 pF , or 12.5 pF
Turnover Temperature (Ti)	25 °C ± 5 °C
Parabolic Coefficient (B)	(- 0.03 ± 0.01) * 10 ⁻⁶ / °C ²
Aging (at 25 °C)	± 3 ppm at first year
Storage Temperature Range	- 55 ~ +125 °C
Reliability Standard	AEC-Q200

Equivalent Series Resistance(ESR)

AH
 70 KΩ Max

Dimensions

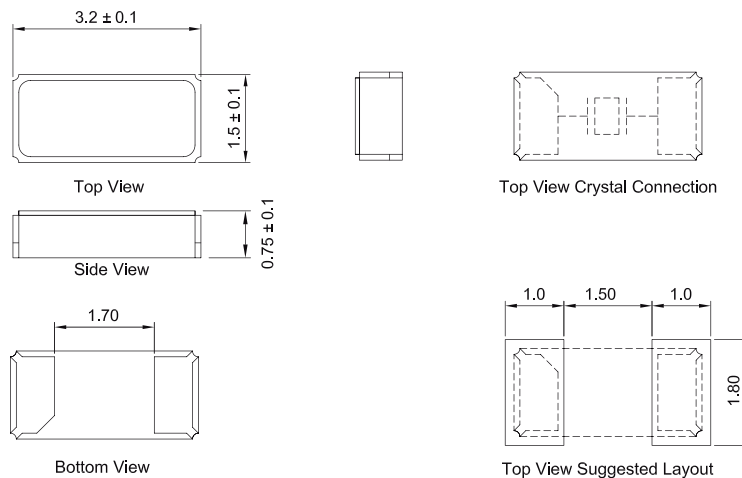

Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales. <http://www.txccorp.com>

单击下面可查看定价，库存，交付和生命周期等信息

[>>TXC\(台湾晶技\)](#)