

SMD Glass Sealing Crystals 3.2 x 2.5 x 0.9 mm A3 Series (2 PAD)



Features

- Reliable glass sealed ceramic package.
- Wide operating temperature range.
- Superior and reliable performance in harsh environment.
- Excellent environment-resistant performance, including heat, vibration and shock resistance.
- Contains Pb in sealing glass exempted by RoHS directive


Electrical Specifications

Item / Type	A3
Frequency Range	8 ~ 54 MHz
Frequency Tolerance (at 25 °C)	± 30 ppm, or specify
Frequency Stability Over Operating Temperature Range	± 50 ppm Max.
Operating Temperature Range	- 40 ~ 125 °C
Shunt Capacitance (C0)	3 pF Max.
Drive Level	10 μW (typical) ; 100 μW (Max.)
Load Capacitance	8 pF, 10 pF or specify
Aging (at 25 °C)	± 3 ppm / year Max.
Storage Temperature Range	- 40 ~ 125 °C
Reliability Standard	AEC-Q200

Equivalent Series Resistance(ESR)

Fundamental	
8 ~ 9.84 MHz	300 Ω Max.
9.84 ~ 12 MHz	200 Ω Max.
12 ~ 20 MHz	120 Ω Max.
20 ~ 54 MHz	60 Ω Max.

Dimensions

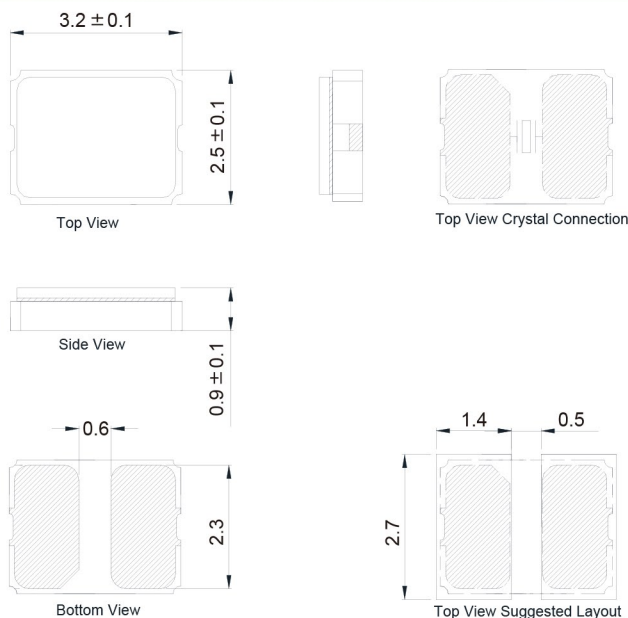

Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales. <http://www.txccorp.com>

单击下面可查看定价，库存，交付和生命周期等信息

[>>TXC\(台湾晶技\)](#)