
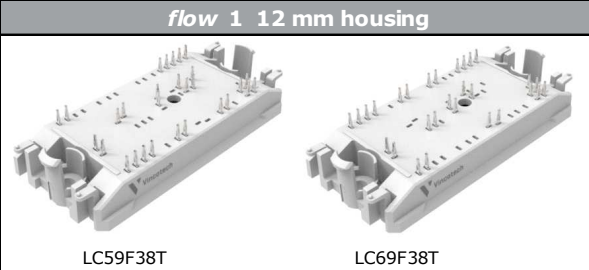


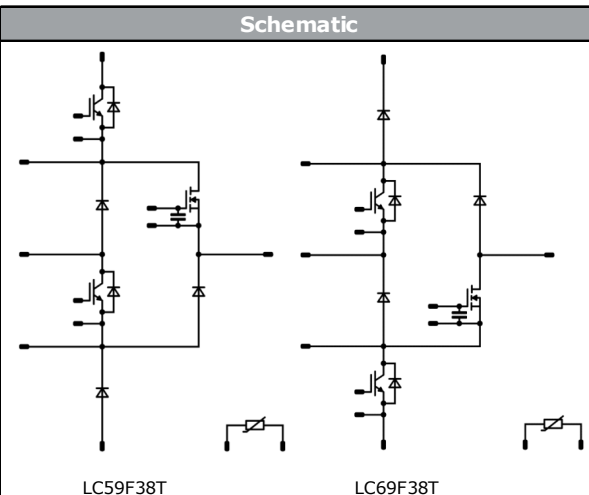

Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

<i>flow ANPC 1 split</i>	<b>1200 V / 8 mΩ</b>
<div style="border: 1px solid black; padding: 5px; margin-bottom: 5px;"> <p style="text-align: center; background-color: #ccc; margin: 0;"><b>Features</b></p> <ul style="list-style-type: none"> <li>Split Advanced NPC topology</li> <li>Ultra-high switching frequency with SiC MOSFETs</li> <li>Split topology for better thermal performance</li> <li>No x-conduction at high frequencies</li> </ul> </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 5px;"> <p style="text-align: center; background-color: #ccc; margin: 0;"><b>Target applications</b></p> <ul style="list-style-type: none"> <li>Solar Inverter</li> </ul> </div> <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; background-color: #ccc; margin: 0;"><b>Types</b></p> <ul style="list-style-type: none"> <li>10-PH12NAB008MR02-LC59F38T</li> <li>10-PH12NAC008MR02-LC69F38T</li> </ul> </div>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 5px;"> <p style="text-align: center; background-color: #ccc; margin: 0;"><i>flow 1 12 mm housing</i></p>  <p style="display: flex; justify-content: space-around; margin: 0;"> <span>LC59F38T</span> <span>LC69F38T</span> </p> </div> <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; background-color: #ccc; margin: 0;"><b>Schematic</b></p>  <p style="display: flex; justify-content: space-around; margin: 0;"> <span>LC59F38T</span> <span>LC69F38T</span> </p> </div>

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
<b>DC-Link Switch</b>				
Collector-emitter voltage	$V_{CES}$		1200	V
Collector current	$I_C$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	123	A
Repetitive peak collector current	$I_{CRM}$	$t_p$ limited by $T_{jmax}$	300	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	232	W
Gate-emitter voltage	$V_{GES}$		±20	V
Maximum junction temperature	$T_{jmax}$		175	°C



Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
-----------	--------	-----------	-------	------

### DC-Link Diode

Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Continuous (direct) forward current	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	72	A
Repetitive peak forward current	$I_{FRM}$		200	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	121	W
Maximum junction temperature	$T_{jmax}$		175	°C

### DC-Link Switch Inverse Diode

Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Continuous (direct) forward current	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	72	A
Repetitive peak forward current	$I_{FRM}$		200	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	121	W
Maximum junction temperature	$T_{jmax}$		175	°C

### Neutral Point Switch

Collector-emitter voltage	$V_{CES}$		1200	V
Collector current	$I_C$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	123	A
Repetitive peak collector current	$I_{CRM}$	$t_p$ limited by $T_{jmax}$	300	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	232	W
Gate-emitter voltage	$V_{GES}$		±20	V
Maximum junction temperature	$T_{jmax}$		175	°C

### Neutral Point Diode

Peak Repetitive Reverse Voltage	$V_{RRM}$		1200	V
Continuous (direct) forward current	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	97	A
Repetitive peak forward current	$I_{FRM}$		300	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	151	W
Maximum Junction Temperature	$T_{jmax}$		175	°C



Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
<b>Neutral Point Switch Prot. Diode</b>				
Peak Repetitive Reverse Voltage	$V_{RRM}$		1200	V
Continuous (direct) forward current	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	15	A
Surge (non-repetitive) forward current	$I_{FSM}$	50 Hz Single Half Sine Wave $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	65	A
Surge current capability	$I_{\Delta t}$		21	A <sup>2</sup> s
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	39	W
Maximum Junction Temperature	$T_{jmax}$		175	°C

## AC Switch

Drain-source voltage	$V_{DSS}$		1200	V
Drain current	$I_D$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	141	A
Peak drain current	$I_{DM}$	$t_p$ limited by $T_{jmax}$	685	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	279	W
Gate-source voltage	$V_{GSS}$		-4/22	V
Maximum Junction Temperature	$T_{jmax}$		175	°C

## AC Diode

Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Continuous (direct) forward current	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	72	A
Repetitive peak forward current	$I_{FRM}$		252	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	183	W
Maximum junction temperature	$T_{jmax}$		175	°C

## GS Capacitor

Maximum DC voltage	$V_{MAX}$		25	V
Operation Temperature	$T_{op}$		-55...+125	°C



Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
target datasheet

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Condition	Value	Unit
-----------	--------	-----------	-------	------

### Module Properties

#### Thermal Properties

Storage temperature	$T_{stg}$		-40...+125	°C
Operation temperature under switching condition	$T_{top}$		-40...(T <sub>max</sub> - 25)	°C

#### Isolation Properties

Isolation voltage	$V_{isol}$	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
		AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			>12,7	mm
Clearance			8,21	mm
Comparative Tracking Index	CTI		> 200	

\*100 % tested in production



Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

## Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		$V_{GS}$ [V]	$V_{GE}$ [V]	$V_{DS}$ [V]	$I_D$ [A]	$T_j$ [°C]	Min	Typ	Max	

### DC-Link Switch

#### Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{GE} = V_{CE}$			0,015	25	5,4	6	6,6	V
Collector-emitter saturation voltage	$V_{CEsat}$		15		150	25 125 150		1,70 1,97 2,02	2,05	V
Collector-emitter cut-off current	$I_{CES}$		0	1200		25			160	μA
Gate-emitter leakage current	$I_{GES}$		20	0		25			500	nA
Internal gate resistance	$r_g$							3		Ω
Input capacitance	$C_{ies}$							30000		pF
Output capacitance	$C_{oes}$		0	10		25		880		
Reverse transfer capacitance	$C_{res}$							320		
Gate charge	$Q_g$		15	600	150	25		1000		nC

#### Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,41		K/W
-------------------------------------	---------------	------------------------------------	--	--	--	--	--	------	--	-----

### DC-Link Diode

#### Static

Forward voltage	$V_F$				100	25 125 150		1,74 1,98 1,98	2,15	V
Reverse leakage current	$I_R$			1200		25			60	μA

#### Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,79		K/W
-------------------------------------	---------------	------------------------------------	--	--	--	--	--	------	--	-----

### DC-Link Switch Inverse Diode

#### Static

Forward voltage	$V_F$				100	25 125 150		1,74 1,98 1,98	2,15	V
Reverse leakage current	$I_R$			1200		25			60	μA

#### Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,79		K/W
-------------------------------------	---------------	------------------------------------	--	--	--	--	--	------	--	-----



Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

### Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		$V_{GS}$ [V]	$V_{GE}$ [V]	$V_{DS}$ [V]	$I_C$ [A]	$T_j$ [°C]	Min	Typ	Max	

#### Neutral Point Switch

##### Static

Parameter	Symbol	$V_{GE} = V_{CE}$	$V_{GS}$ [V]	$V_{CE}$ [V]	$I_C$ [A]	$T_j$ [°C]	Min	Typ	Max	Unit
Gate-emitter threshold voltage	$V_{GE(th)}$				0,015	25	5,4	6	6,6	V
Collector-emitter saturation voltage	$V_{CEsat}$		15		150	25 125 150		1,70 1,97 2,02	2,05	V
Collector-emitter cut-off current	$I_{CES}$		0	1200		25			160	μA
Gate-emitter leakage current	$I_{GES}$		20	0		25			500	nA
Internal gate resistance	$r_g$							3		Ω
Input capacitance	$C_{ies}$							30000		pF
Output capacitance	$C_{oes}$		0	10		25		880		
Reverse transfer capacitance	$C_{res}$							320		
Gate charge	$Q_g$		15	600	150	25		1000		nC

##### Thermal

Parameter	Symbol	Conditions	Unit
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4 \text{ W/mK}$ (PSX)	K/W

##### Dynamic

Parameter	Symbol	$R_{goff} = 4 \Omega$ $R_{gon} = 4 \Omega$	$V_{GS}$ [V]	$V_{CE}$ [V]	$I_C$ [A]	$T_j$ [°C]	Min	Typ	Max	Unit
Turn-on delay time	$t_{d(on)}$					25 125 150		397 403 405		ns
Rise time	$t_r$					25 125 150		61 71 75		
Turn-off delay time	$t_{d(off)}$					25 125 150		307 348 360		
Fall time	$t_f$					25 125 150		88 119 129		
Turn-on energy (per pulse)	$E_{on}$	$Q_{tFWD} = 10,6 \mu\text{C}$ $Q_{tFWD} = 14,8 \mu\text{C}$ $Q_{tFWD} = 16,5 \mu\text{C}$				25 125 150		13,439 15,742 16,533		mWs
Turn-off energy (per pulse)	$E_{off}$					25 125 150		7,262 9,977 10,645		



Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

### Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		$V_{GE}$ [V]	$V_{CE}$ [V]	$I_C$ [A]	$T_j$ [°C]	Min	Typ	Max		

#### Neutral Point Diode

##### Static

Parameter	Symbol	$V_{GE}$ [V]	$V_{CE}$ [V]	$I_C$ [A]	$T_j$ [°C]	Min	Typ	Max	Unit
Forward voltage	$V_F$			150	25 125 150		1,80 1,90 1,90	2,15	V
Reverse leakage current	$I_r$		1200		25			90	μA

##### Thermal

Parameter	Symbol	Conditions	Value	Unit
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)	0,63	K/W

##### Dynamic

Parameter	Symbol	Conditions	Value	Unit		
Peak recovery current	$I_{RRM}$		25 125 150	59 61 61 A		
Reverse recovery time	$t_{rr}$		25 125 150	347 471 513 ns		
Recovered charge	$Q_r$	$di/dt = 1592$ A/μs $di/dt = 1303$ A/μs $di/dt = 1123$ A/μs ±15	600	110	25 125 150	10,571 14,821 16,511 μC
Reverse recovered energy	$E_{rec}$				25 125 150	3,292 5,159 5,896 mWs
Peak rate of fall of recovery current	$(di_{rf}/dt)_{max}$				25 125 150	210 223 208 A/μs

#### Neutral Point Switch Prot. Diode

##### Static

Parameter	Symbol	$V_{GE}$ [V]	$V_{CE}$ [V]	$I_C$ [A]	$T_j$ [°C]	Min	Typ	Max	Unit
Forward voltage	$V_F$			30	25 125		2,37 2,47	2,71	V
Reverse leakage current	$I_R$		1200		25 150			120 3600	μA

##### Thermal

Parameter	Symbol	Conditions	Value	Unit
Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)	2,46	K/W



Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

### Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		$V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V]	$I_C$ [A] $I_D$ [A]	$T_j$ [°C]	Min	Typ	Max		

#### AC Switch

##### Static

Drain-source on-state resistance	$r_{DS(on)}$	18		100	25 125 150		8 11 12	10	mΩ
Gate-source threshold voltage	$V_{GS(th)}$		10	0,05	25	2,7		5,6	V
Gate to Source Leakage Current	$I_{GSS}$	-4/22	0		25			±500	nA
Zero Gate Voltage Drain Current	$I_{DSS}$	0	1200		25			50	μA
Internal gate resistance	$r_g$						1,4		Ω
Gate charge	$Q_g$						535		nC
Gate to source charge	$Q_{GS}$	18	600	100	25		110		
Gate to drain charge	$Q_{GD}$						205		
Short-circuit input capacitance	$C_{iss}$						6685		pF
Short-circuit output capacitance	$C_{oss}$	$f = 1$ MHz	0	800	25		380		
Reverse transfer capacitance	$C_{rss}$						135		

##### Reverse Diode Static

Diode forward voltage	$V_{SD}$	0		100	25		3,2		V
-----------------------	----------	---	--	-----	----	--	-----	--	---

##### Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)					0,34		K/W
-------------------------------------	---------------	---------------------------------------	--	--	--	--	------	--	-----

##### Dynamic

Turn-on delay time	$t_{d(on)}$				25 125 150		30 29 27		ns
Rise time	$t_r$	$R_{goff} = 1$ Ω $R_{gon} = 1$ Ω			25 125 150		14 15 15		
Turn-off delay time	$t_{d(off)}$		0/16	600	99		83 101 101		
Fall time	$t_f$				25 125 150		9 13 13		
Turn-on energy (per pulse)	$E_{on}$	$Q_{tFWD} = 0,4$ μC $Q_{tFWD} = 0,8$ μC $Q_{tFWD} = 1,4$ μC			25 125 150		1,256 1,436 1,410		
Turn-off energy (per pulse)	$E_{off}$				25 125 150		1,016 1,421 1,482		mWs





### Characteristic Values

Parameter	Symbol	Conditions					Value			Unit
		$V_{GE}$ [V]	$V_{CE}$ [V]	$I_C$ [A]	$T_j$ [°C]	Min	Typ	Max		

#### AC Diode

##### Static

Forward voltage	$V_F$			60	25 125		1,63 2,04	1,7	V
Reverse leakage current	$I_R$		1200		25			1200	$\mu$ A

##### Thermal

Thermal resistance junction to sink	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)					0,52		K/W
-------------------------------------	---------------	------------------------------------	--	--	--	--	------	--	-----

##### Dynamic

Peak recovery current	$I_{RRM}$				25 125 150		59 52 54		A
Reverse recovery time	$t_{rr}$				25 125 150		14 15 51		ns
Recovered charge	$Q_r$	$di/dt = 7141$ A/ $\mu$ s $di/dt = 10501$ A/ $\mu$ s $di/dt = 8639$ A/ $\mu$ s	0/16	600	99	25 125 150	0,432 0,794 1,431		$\mu$ C
Reverse recovered energy	$E_{rec}$				25 125 150		0,068 0,221 0,537		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$				25 125 150		13486 10799 4954		A/ $\mu$ s

#### GS Capacitor

Capacitance	$C$						10		nF
Tolerance							-10	+10	%
Dissipation factor		$f = 1$ kHz				25		0,1	%

#### Thermistor

Rated resistance	$R$				25		22		k $\Omega$
Deviation of $R_{100}$	$\Delta_{R/R}$	$R_{100} = 1484$ $\Omega$			100		-5	5	%
Power dissipation	$P$				25		5		mW
Power dissipation constant					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 1$ %			25		3962		K
B-value	$B_{(25/100)}$	Tol. $\pm 1$ %			25		4000		K
Vincotech NTC Reference								I	




## DC-Link Switch Characteristics

**figure 1.** IGBT

Typical output characteristics

$$I_C = f(V_{GE})$$

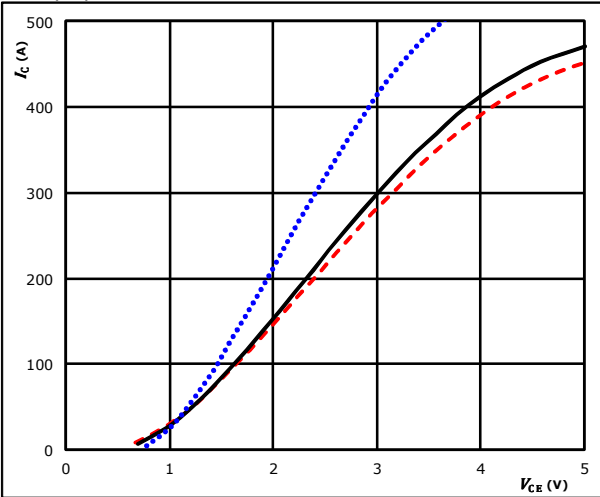


$t_p = 250 \mu s$   
 $V_{GE} = 15 V$   
 $T_j: 25 \text{ }^\circ C$  (dotted blue)  
 $125 \text{ }^\circ C$  (solid black)  
 $150 \text{ }^\circ C$  (dashed red)

**figure 2.** IGBT

Typical output characteristics

$$I_C = f(V_{GE})$$

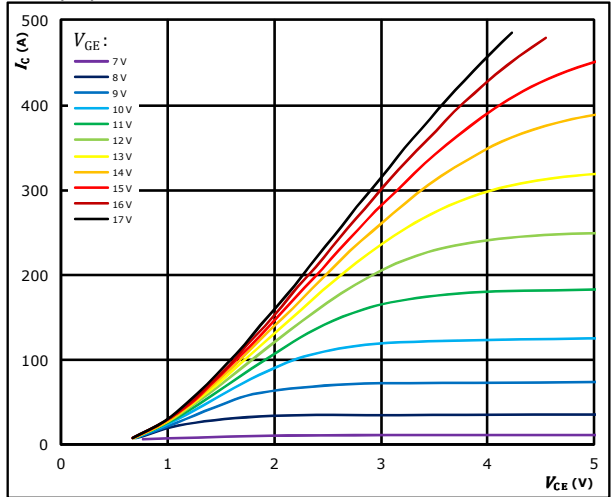


$t_p = 250 \mu s$   
 $T_j = 150 \text{ }^\circ C$   
 $V_{GE}$  from 7 V to 17 V in steps of 1 V

**figure 3.** IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

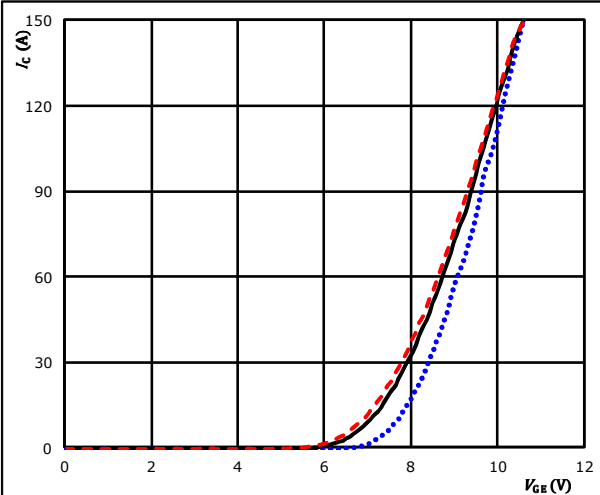


$t_p = 100 \mu s$   
 $V_{CE} = 10 V$   
 $T_j: 25 \text{ }^\circ C$  (dotted blue)  
 $125 \text{ }^\circ C$  (solid black)  
 $150 \text{ }^\circ C$  (dashed red)

**figure 4.** IGBT

Transient thermal impedance as function of pulse duration

$$Z_{th(j-s)} = f(t_p)$$

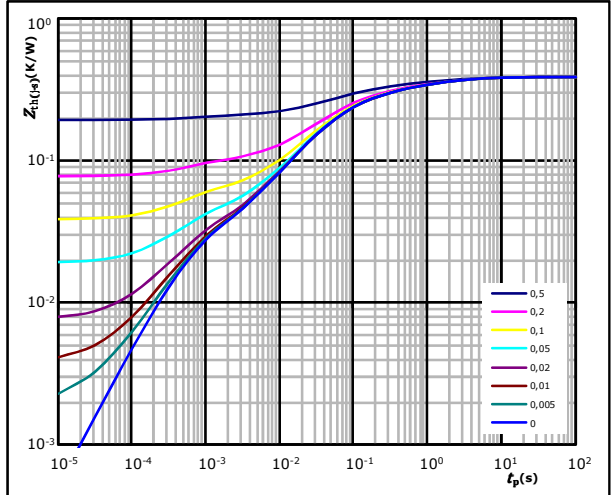

$D = t_p / T$   
 $R_{th(j-s)} = 0,41 \text{ K/W}$   
 IGBT thermal model values

R (K/W)	$\tau$ (s)
4,47E-02	2,80E+00
9,73E-02	5,59E-01
2,47E-01	1,59E-01
3,88E-02	2,12E-02
1,13E-02	5,12E-03
1,42E-02	6,59E-04




### DC-Link Switch Characteristics

**figure 5. IGBT**

Gate voltage vs gate charge


$V_{GE} = f(Q_G)$

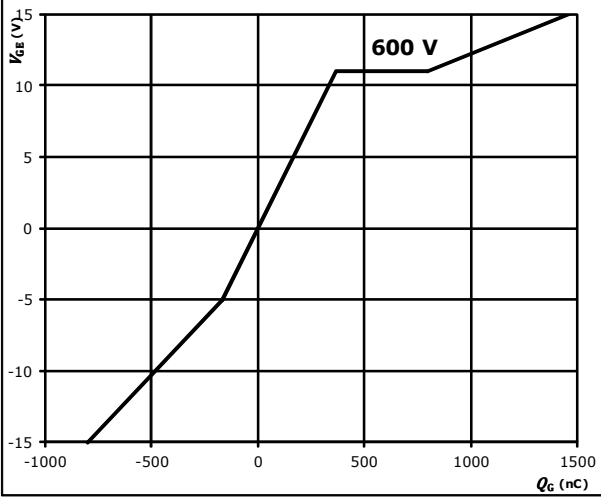

$I_C = 150$  A  
 $V_{GE} = \pm 15$  V  
 $V_{CC} = 600$  V

**figure 6. IGBT**

Safe operating area

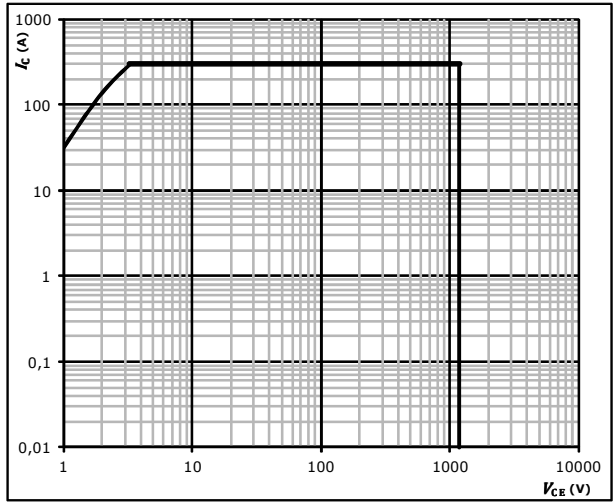

$D =$  single pulse  
 $T_s = 80$  °C  
 $V_{GE} = \pm 15$  V  
 $T_j = T_{jmax}$




### DC-Link Diode Characteristics

**figure 1.** FWD

Typical forward characteristics

$$I_F = f(V_F)$$

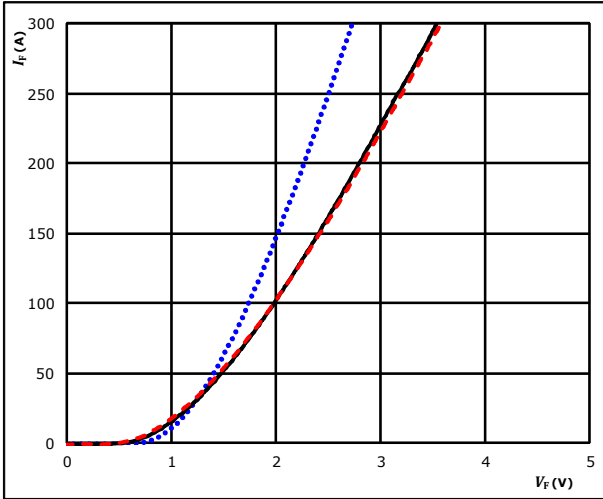


$t_p = 250 \mu s$   
 $T_j$ : 25 °C (blue dotted line)  
 125 °C (black solid line)  
 150 °C (red dashed line)

**figure 2.** FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

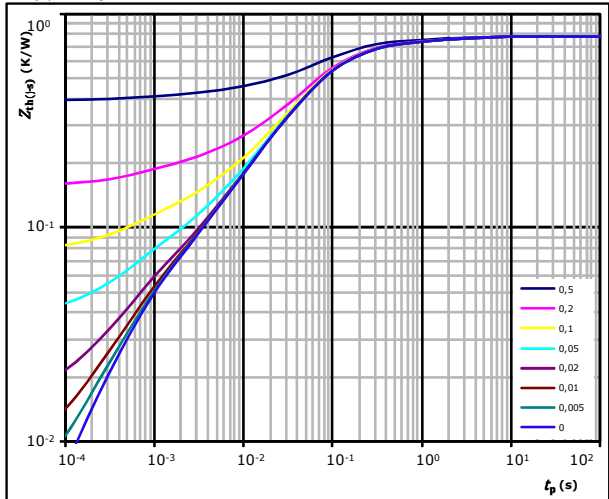

$D = t_p / T$   
 $R_{th(j-s)} = 0,79 \text{ K/W}$   
 FWD thermal model values

$R$ (K/W)	$\tau$ (s)
4,05E-02	3,25E+00
9,02E-02	5,38E-01
3,71E-01	8,95E-02
1,97E-01	3,04E-02
5,23E-02	4,59E-03
3,58E-02	6,26E-04




## DC-Link Switch Inverse Diode Characteristics

**figure 1.** FWD

Typical forward characteristics

$$I_F = f(V_F)$$

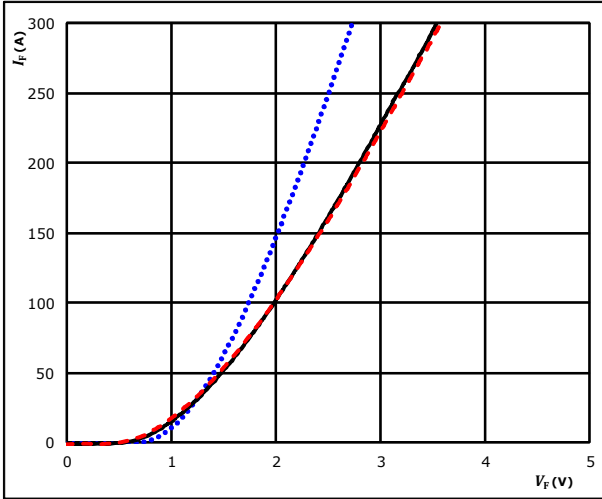


$t_p = 250 \mu s$

$T_j$ : 25 °C (blue dotted line)  
 125 °C (black solid line)  
 150 °C (red dashed line)

**figure 2.** FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

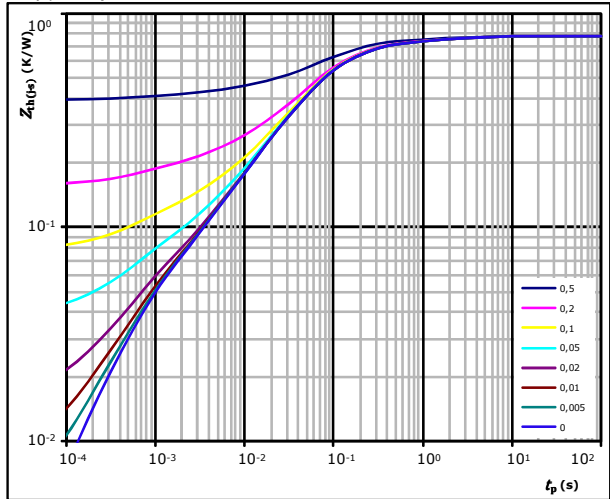

$D = t_p / T$

$R_{th(j-s)} = 0,79 \text{ K/W}$

FWD thermal model values

$R$ (K/W)	$\tau$ (s)
4,05E-02	3,25E+00
9,02E-02	5,38E-01
3,71E-01	8,95E-02
1,97E-01	3,04E-02
5,23E-02	4,59E-03
3,58E-02	6,26E-04



Vincotech


**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

## Neutral Point Switch Characteristics

**figure 1.** IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

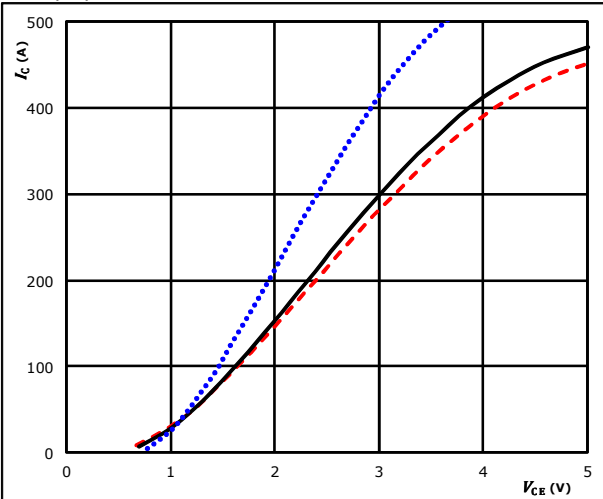


$t_p = 250 \mu\text{s}$   
 $V_{GE} = 15 \text{ V}$   
 $T_j: 25 \text{ }^\circ\text{C}$  (blue dotted line)  
 $125 \text{ }^\circ\text{C}$  (black solid line)  
 $150 \text{ }^\circ\text{C}$  (red dashed line)

**figure 2.** IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

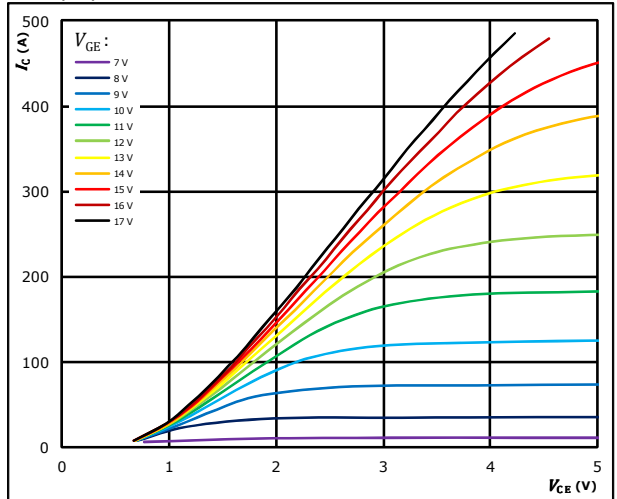


$t_p = 250 \mu\text{s}$   
 $T_j = 150 \text{ }^\circ\text{C}$   
 $V_{GE}$  from 7 V to 17 V in steps of 1 V

**figure 3.** IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

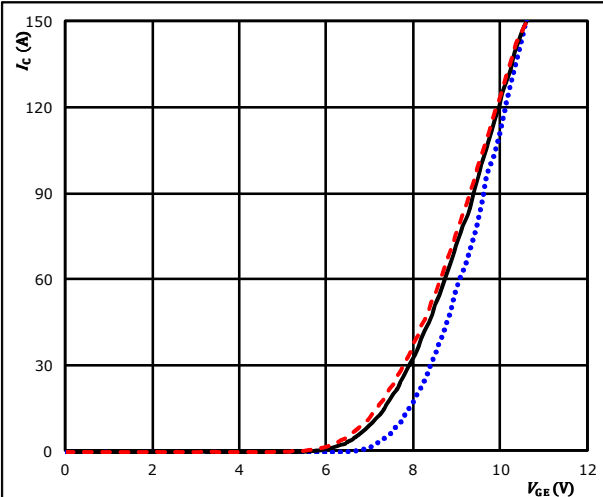


$t_p = 100 \mu\text{s}$   
 $V_{CE} = 10 \text{ V}$   
 $T_j: 25 \text{ }^\circ\text{C}$  (blue dotted line)  
 $125 \text{ }^\circ\text{C}$  (black solid line)  
 $150 \text{ }^\circ\text{C}$  (red dashed line)

**figure 4.** IGBT

Transient thermal impedance as function of pulse duration

$$Z_{th(\theta-s)} = f(t_p)$$

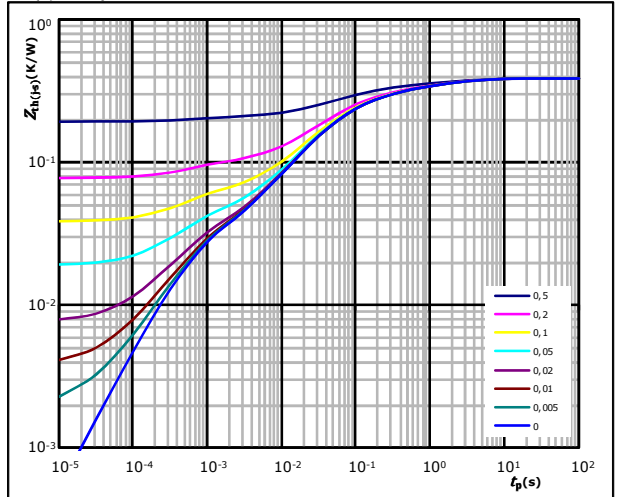

$D = t_p / T$   
 $R_{th(\theta-s)} = 0,41 \text{ K/W}$   
 IGBT thermal model values

R (K/W)	$\tau$ (s)
4,47E-02	2,80E+00
9,73E-02	5,59E-01
2,47E-01	1,59E-01
3,88E-02	2,12E-02
1,13E-02	5,12E-03
1,42E-02	6,59E-04




### Neutral Point Switch Characteristics

**figure 5. IGBT**

Gate voltage vs gate charge


$V_{GE} = f(Q_G)$

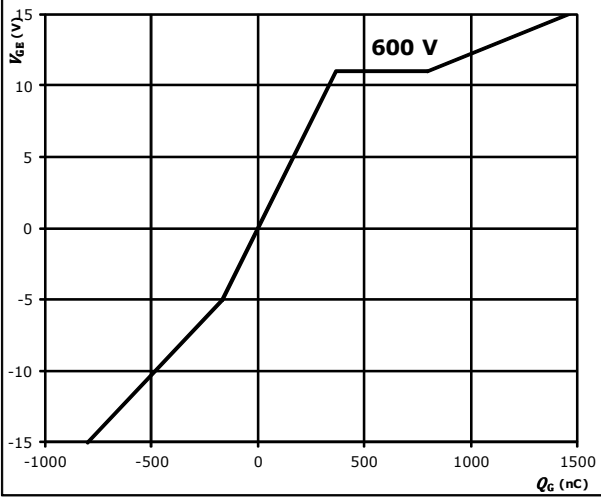

$I_C = 150$  A  
 $V_{GE} = \pm 15$  V  
 $V_{CC} = 600$  V

**figure 6. IGBT**

Safe operating area

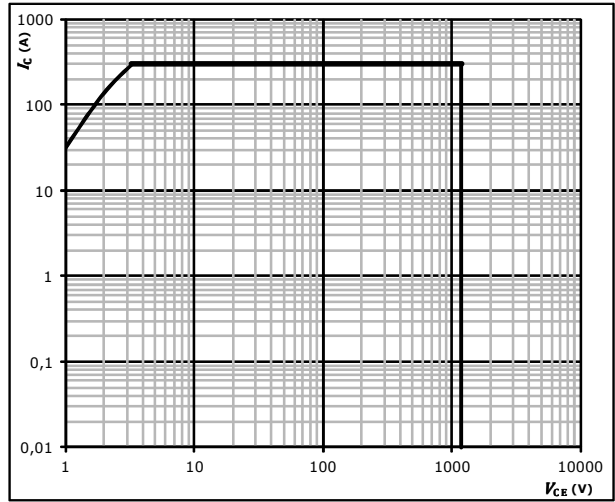

$D =$  single pulse  
 $T_s = 80$  °C  
 $V_{GE} = \pm 15$  V  
 $T_j = T_{jmax}$




### Neutral Point Diode Characteristics

**figure 1.** FWD

Typical forward characteristics

$$I_F = f(V_F)$$

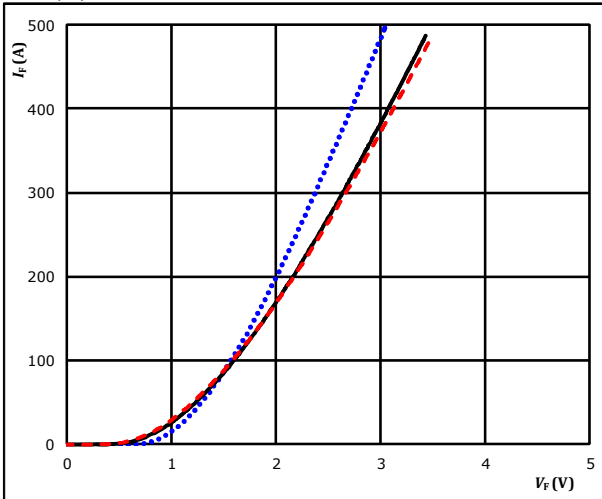


$t_p = 250 \mu s$

$T_j$ : 25 °C (blue dotted line)  
 125 °C (black solid line)  
 150 °C (red dashed line)

**figure 2.** FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

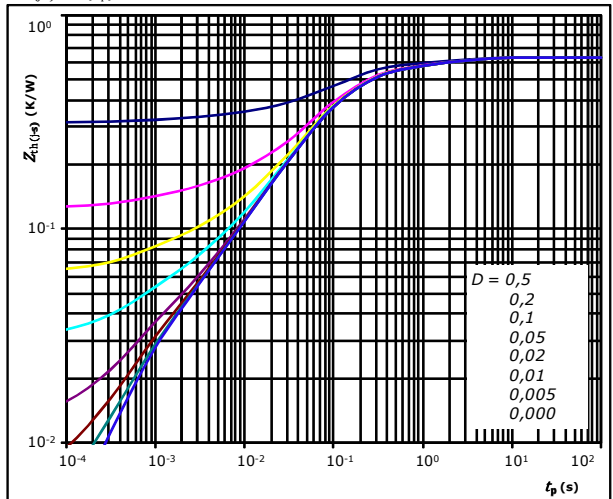

$D = t_p / T$

$R_{th(j-s)} = 0,63 \text{ K/W}$

FWD thermal model values


$R$ (K/W)	$\tau$ (s)
5,76E-02	2,80E+00
9,23E-02	5,30E-01
3,12E-01	1,04E-01
1,04E-01	3,96E-02
4,08E-02	6,94E-03
2,31E-02	8,04E-04






## Neutral Point Switch Prot. Diode Characteristics

**figure 1.** FWD  
**Typical forward characteristics**

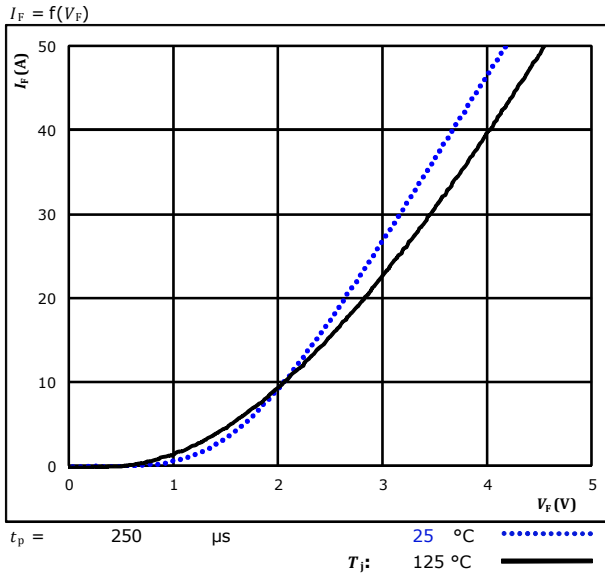

**figure 2.** FWD  
**Transient thermal impedance as a function of pulse width**

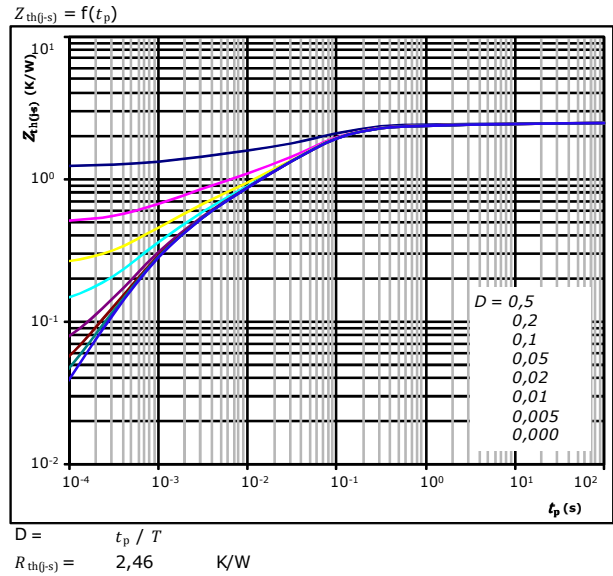

FWD thermal model values

$R$ (K/W)	$\tau$ (s)
8,08E-02	9,59E+00
1,72E-01	5,73E-01
1,10E+00	7,81E-02
5,04E-01	2,68E-02
3,53E-01	4,22E-03
2,53E-01	8,77E-04




### AC Switch Characteristics

**figure 1.** MOSFET

Typical output characteristics

$I_D = f(V_{DS})$

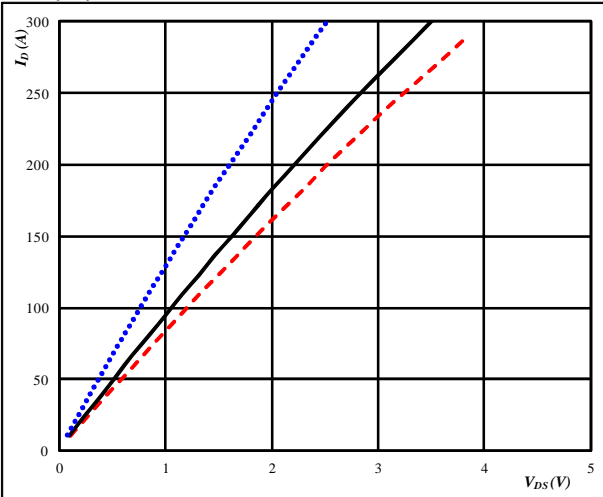


$t_p = 250 \mu s$   
 $V_{GS} = 18 V$   
 $T_j: 25 \text{ } ^\circ C$  (blue dotted line)  
 $125 \text{ } ^\circ C$  (black solid line)  
 $150 \text{ } ^\circ C$  (red dashed line)

**figure 2.** MOSFET

Typical output characteristics

$I_D = f(V_{DS})$

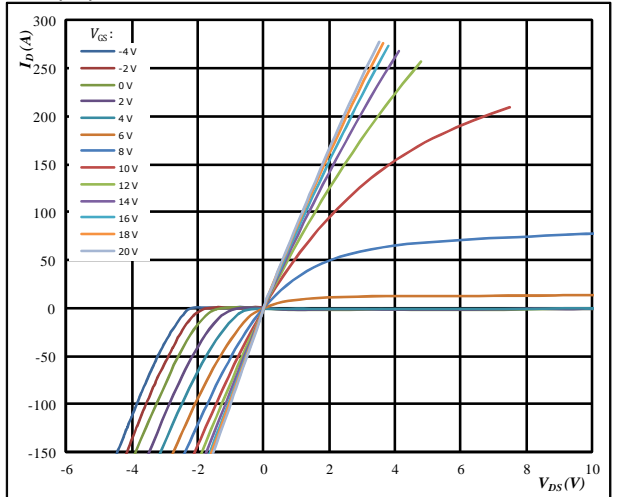


$t_p = 250 \mu s$   
 $T_j = 150 \text{ } ^\circ C$   
 $V_{GS}$  from -4 V to 20 V in steps of 2 V

**figure 3.** MOSFET

Typical transfer characteristics

$I_D = f(V_{GS})$

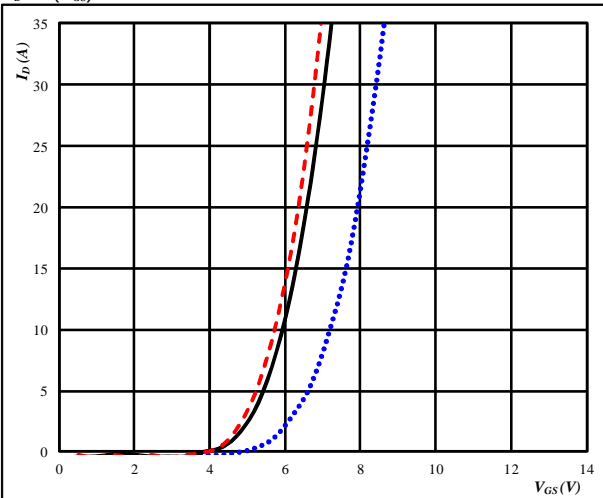


$t_p = 100 \mu s$   
 $V_{DS} = 10 V$   
 $T_j: 25 \text{ } ^\circ C$  (blue dotted line)  
 $125 \text{ } ^\circ C$  (black solid line)  
 $150 \text{ } ^\circ C$  (red dashed line)

**figure 4.** MOSFET

Transient thermal impedance as a function of pulse width

$Z_{th(j-s)} = f(t_p)$

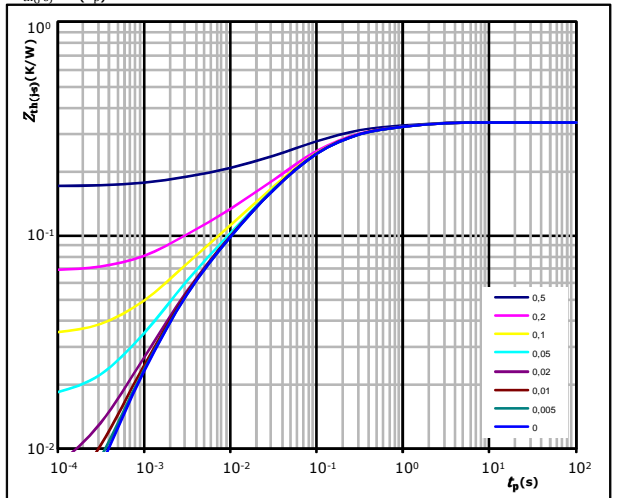

$D = t_p / T$   
 $R_{th(j-s)} = 0,34 \text{ K/W}$   
 MOSFET thermal model values

R (K/W)	$\tau$ (s)
3,91E-02	1,04E+00
1,00E-01	1,44E-01
1,17E-01	4,34E-02
5,18E-02	8,88E-03
3,26E-02	1,76E-03




## AC Diode Characteristics

**figure 1.** FWD

Typical forward characteristics

$$I_F = f(V_F)$$

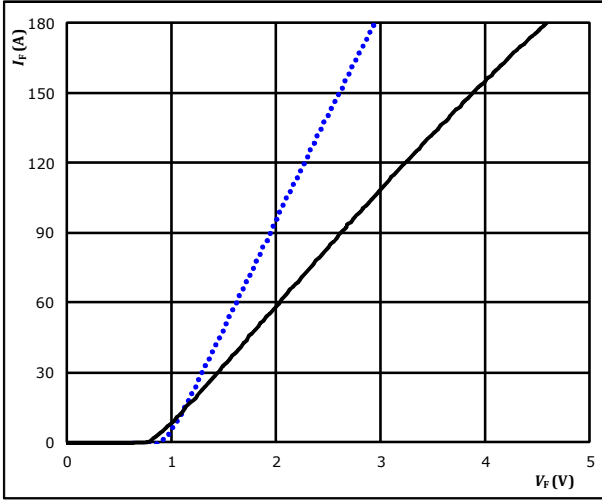


$t_p = 250 \mu s$   $T_j: 25 \text{ }^\circ\text{C}$  (blue dotted line)  $125 \text{ }^\circ\text{C}$  (black solid line)

**figure 2.** FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

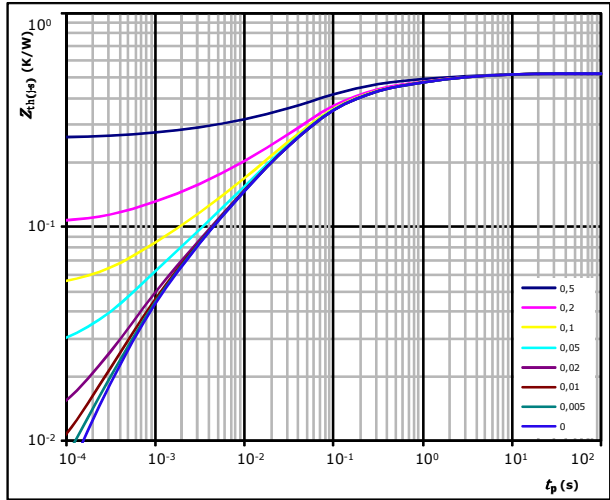

$D = t_p / T$   
 $R_{th(j-s)} = 0,52 \text{ K/W}$

FWD thermal model values


$R$ (K/W)	$\tau$ (s)
2,95E-02	5,33E+00
6,00E-02	9,85E-01
1,02E-01	1,79E-01
1,92E-01	5,14E-02
7,17E-02	1,10E-02
3,93E-02	2,74E-03
2,53E-02	5,68E-04

## Thermistor Characteristics

**figure 1.** Thermistor

Typical NTC characteristic as a function of temperature

$$R = f(T)$$

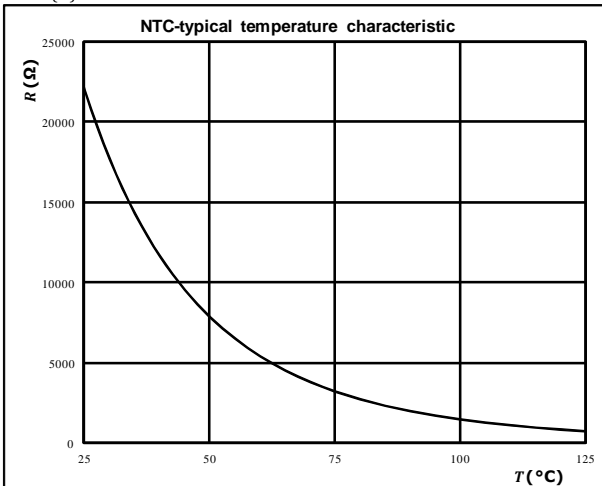




Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

## Neutral Point Switching Characteristics


**figure 1.** IGBT

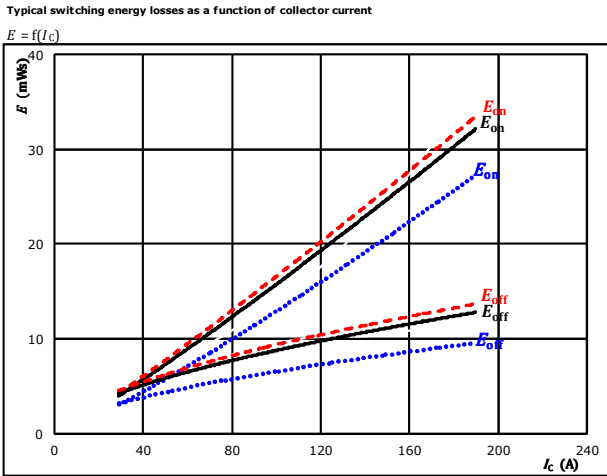

With an inductive load at  
 $V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 4$   $\Omega$   
 $R_{goff} = 4$   $\Omega$

$T_j$ : 25 °C (dotted), 125 °C (solid), 150 °C (dashed)


**figure 2.** IGBT

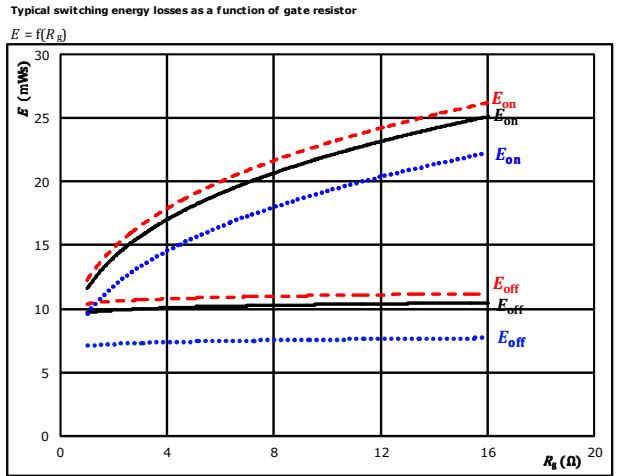

With an inductive load at  
 $V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 110$  A

$T_j$ : 25 °C (dotted), 125 °C (solid), 150 °C (dashed)


**figure 3.** FWD

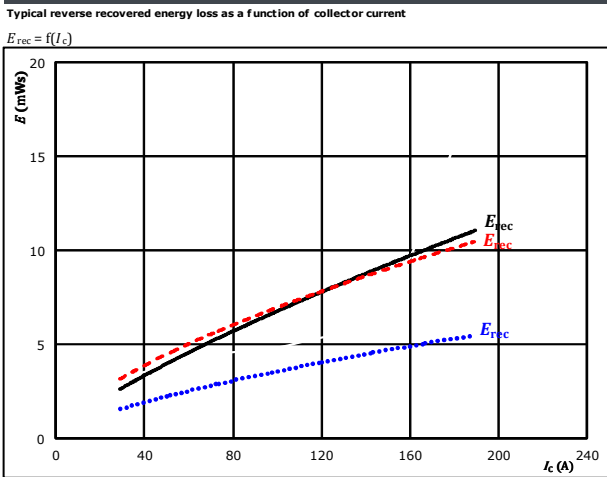

With an inductive load at  
 $V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 4$   $\Omega$

$T_j$ : 25 °C (dotted), 125 °C (solid), 150 °C (dashed)

**figure 4.** FWD

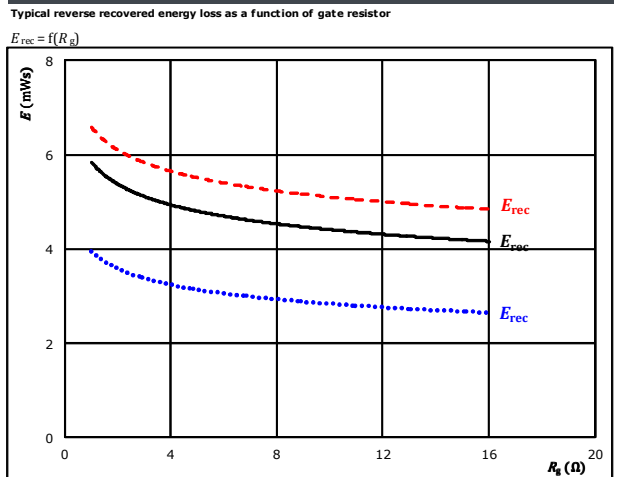

With an inductive load at  
 $V_{CE} = 600$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 110$  A

$T_j$ : 25 °C (dotted), 125 °C (solid), 150 °C (dashed)




## Neutral Point Switching Characteristics

**figure 5.** IGBT

Typical switching times as a function of collector current

$$t = f(I_C)$$

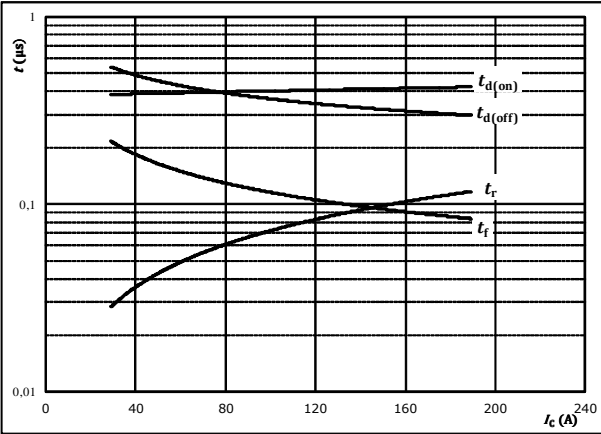


With an inductive load at

$T_j =$	150	°C
$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$R_{gon} =$	4	Ω
$R_{goff} =$	4	Ω

**figure 6.** IGBT

Typical switching times as a function of gate resistor

$$t = f(R_g)$$

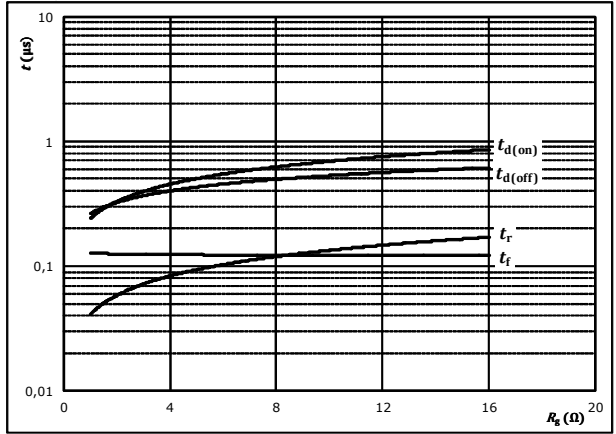


With an inductive load at

$T_j =$	150	°C
$V_{CE} =$	600	V
$V_{GE} =$	±15	V
$I_C =$	110	A

**figure 7.** FWD

Typical reverse recovery time as a function of collector current

$$t_{rr} = f(I_C)$$

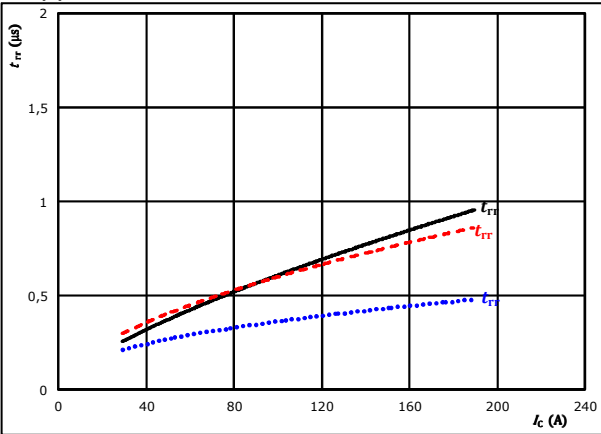


At	$V_{CE} =$	600	V	$T_j:$	25 °C	.....
	$V_{GE} =$	±15	V		125 °C	————
	$R_{gon} =$	4	Ω		150 °C	- - - -

**figure 8.** FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

$$t_{rr} = f(R_{gon})$$

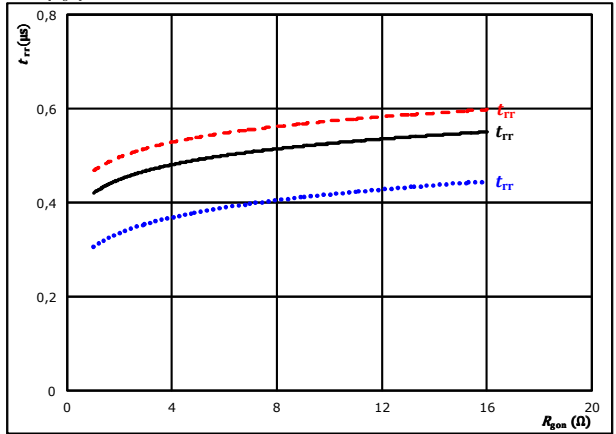

At	$V_{CE} =$	600	V	$T_j:$	25 °C	.....
	$V_{GE} =$	±15	V		125 °C	————
	$I_C =$	110	A		150 °C	- - - -



Vincotech


**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

## Neutral Point Switching Characteristics

**figure 9.** FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

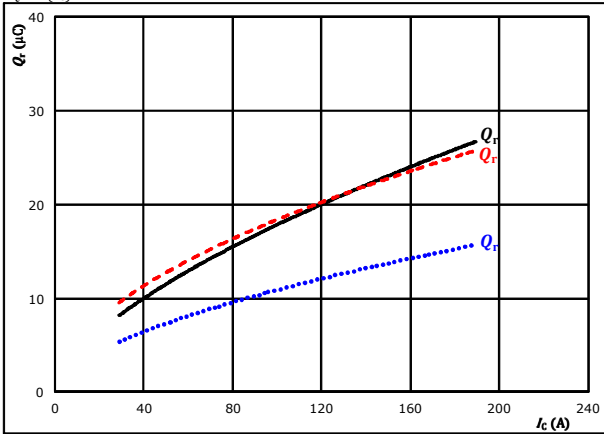


At  $V_{CE} = 600$  V  $T_j = 25$  °C .....  
 $V_{GE} = \pm 15$  V  $T_j = 125$  °C ———  
 $R_{gpn} = 4$  Ω  $T_j = 150$  °C - - - -

**figure 10.** FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gpn})$$

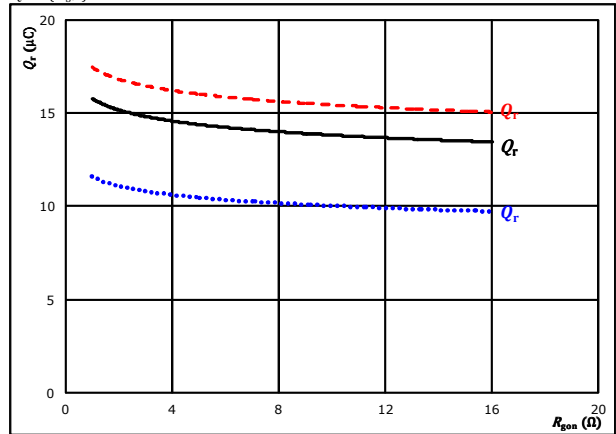


At  $V_{CE} = 600$  V  $T_j = 25$  °C .....  
 $V_{GE} = \pm 15$  V  $T_j = 125$  °C ———  
 $I_c = 110$  A  $T_j = 150$  °C - - - -

**figure 11.** FWD

Typical peak reverse recovery current current as a function of collector current

$$I_{RM} = f(I_c)$$

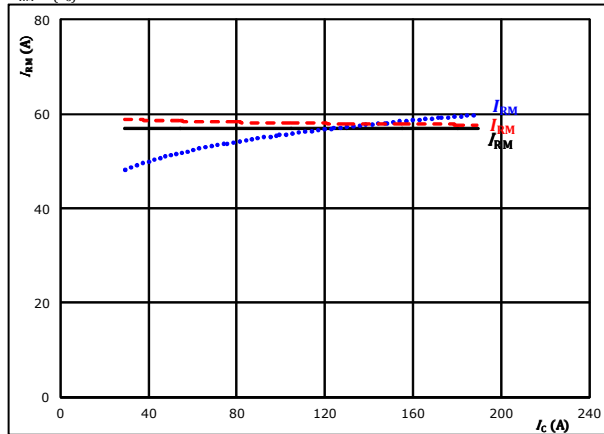


At  $V_{CE} = 600$  V  $T_j = 25$  °C .....  
 $V_{GE} = \pm 15$  V  $T_j = 125$  °C ———  
 $R_{gpn} = 4$  Ω  $T_j = 150$  °C - - - -

**figure 12.** FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gpn})$$

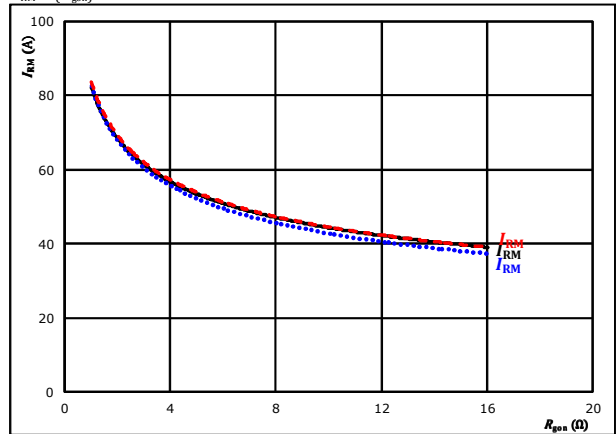

At  $V_{CE} = 600$  V  $T_j = 25$  °C .....  
 $V_{GE} = \pm 15$  V  $T_j = 125$  °C ———  
 $I_c = 110$  A  $T_j = 150$  °C - - - -




Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

## Neutral Point Switching Characteristics

**figure 13.** FWD


Typical rate of fall of forward and reverse recovery current as a function of collector current  
 $di_F/dt, di_{rr}/dt = f(I_C)$

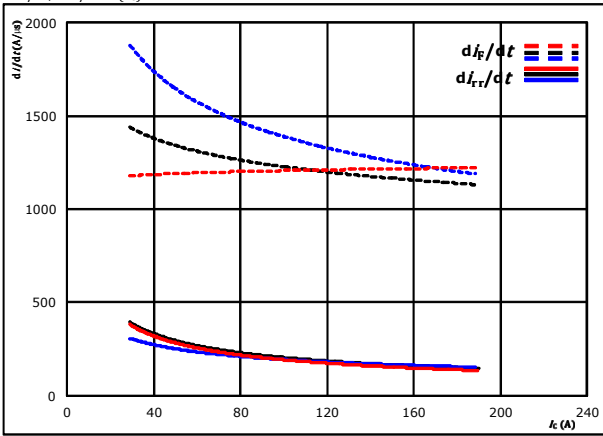

At  $V_{CE} = 600$  V  $T_j = 25$  °C .....  
 $V_{GE} = \pm 15$  V  $T_j = 125$  °C ———  
 $R_{g(on)} = 4$  Ω  $T_j = 150$  °C - - - - -

**figure 14.** FWD


Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor  
 $di_F/dt, di_{rr}/dt = f(R_{g(on)})$

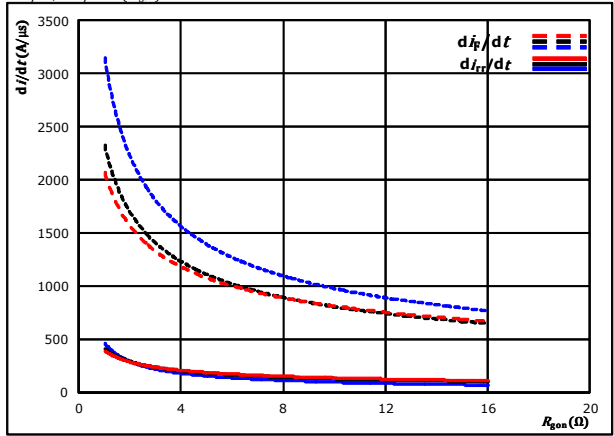

At  $V_{CE} = 600$  V  $T_j = 25$  °C .....  
 $V_{GE} = \pm 15$  V  $T_j = 125$  °C ———  
 $I_C = 110$  A  $T_j = 150$  °C - - - - -

**figure 15.** IGBT

Reverse bias safe operating area  
 $I_C = f(V_{CE})$

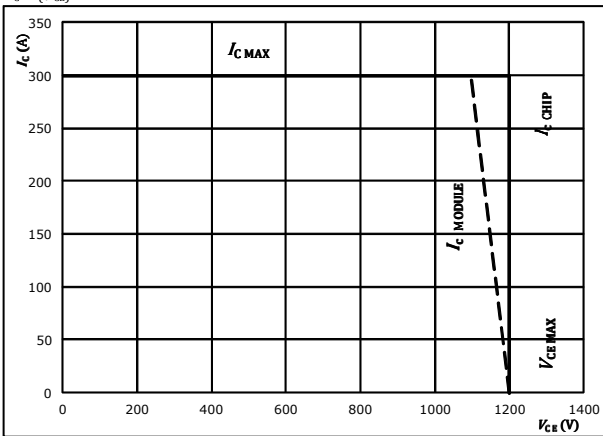

At  $T_j = 175$  °C  
 $R_{g(on)} = 4$  Ω  
 $R_{g(off)} = 4$  Ω



Vincotech


10-PH12NAB008MR02-LC59F38T  
 10-PH12NAC008MR02-LC69F38T  
 target datasheet

## Neutral Point Switching Definitions

### General conditions


$T_j$	=	125 °C
$R_{gon}$	=	4 Ω
$R_{goff}$	=	4 Ω

figure 1. IGBT

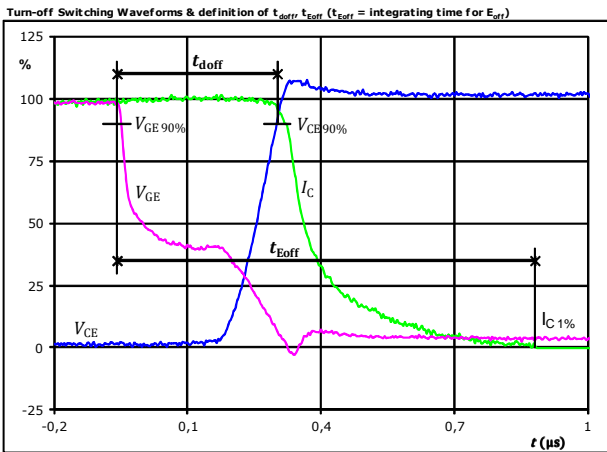


$V_{GE}(0\%) =$	-15	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	110	A
$t_{doff} =$	0,348	μs
$t_{Eoff} =$	0,940	μs

figure 2. IGBT

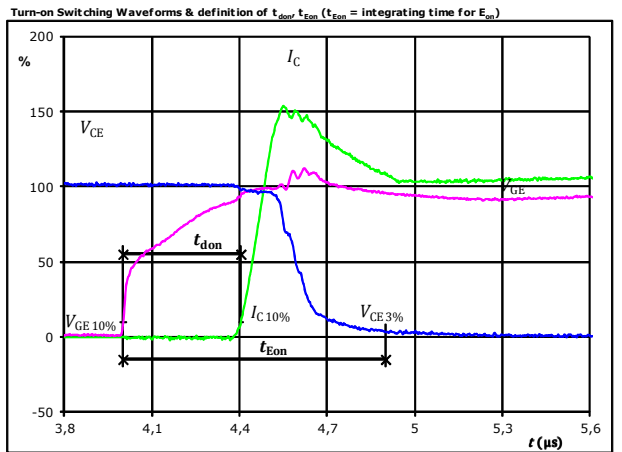


$V_{GE}(0\%) =$	-15	V
$V_{GE}(100\%) =$	15	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	110	A
$t_{don} =$	0,403	μs
$t_{Eon} =$	0,899	μs

figure 3. IGBT

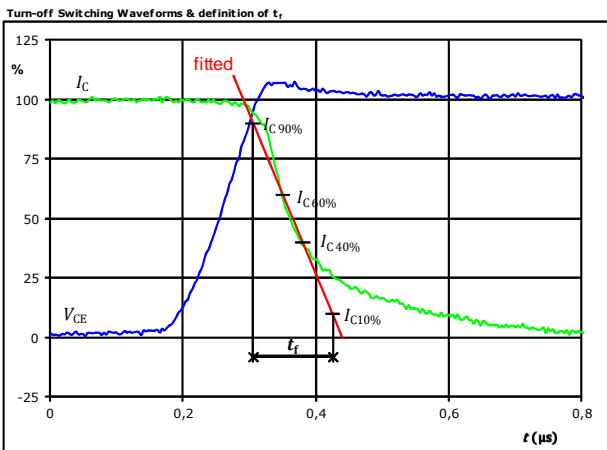

$V_C(100\%) =$	600	V
$I_C(100\%) =$	110	A
$t_f =$	0,119	μs

figure 4. IGBT

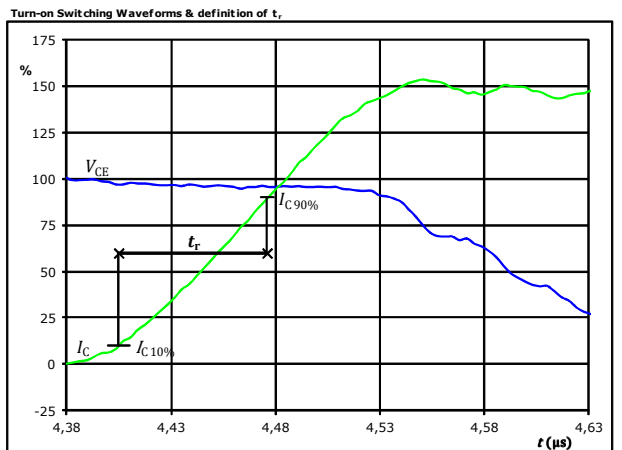

$V_C(100\%) =$	600	V
$I_C(100\%) =$	110	A
$t_r =$	0,071	μs






Vincotech

10-PH12NAB008MR02-LC59F38T  
 10-PH12NAC008MR02-LC69F38T  
 target datasheet


## Neutral Point Switching Characteristics

figure 5. IGBT

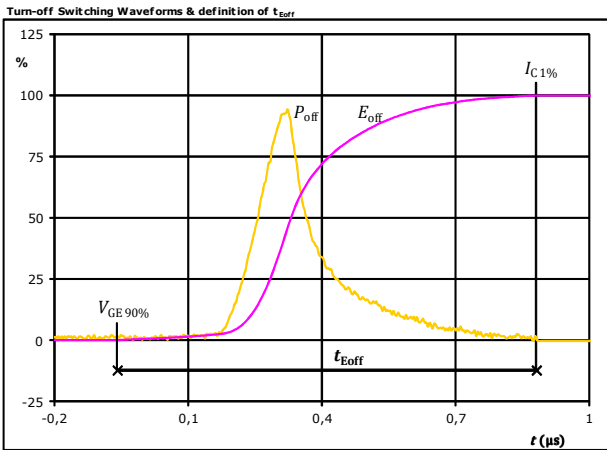


$P_{off}(100\%) = 66,19$  kW  
 $E_{off}(100\%) = 9,98$  mJ  
 $t_{Eoff} = 0,94$  µs

figure 6. IGBT

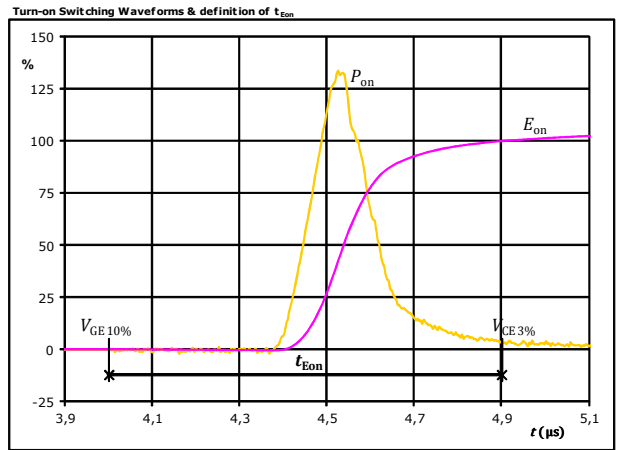

$P_{on}(100\%) = 66,19$  kW  
 $E_{on}(100\%) = 15,74$  mJ  
 $t_{Eon} = 0,90$  µs

figure 7. FWD

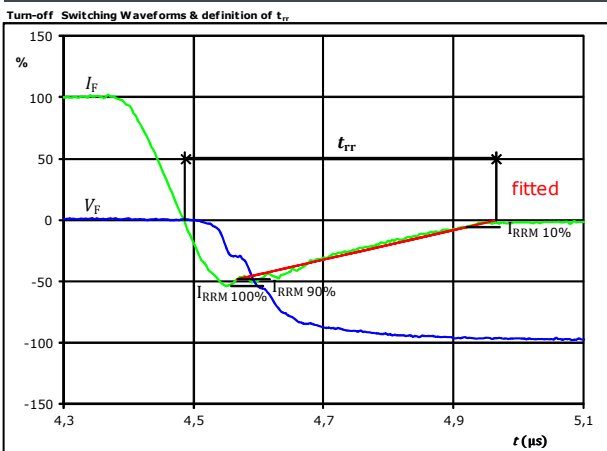

$V_F(100\%) = 600$  V  
 $I_F(100\%) = 110$  A  
 $I_{RRM}(100\%) = -61$  A  
 $t_{rr} = 0,471$  µs




Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet


## Neutral Point Switching Characteristics

**figure 8.** FWD

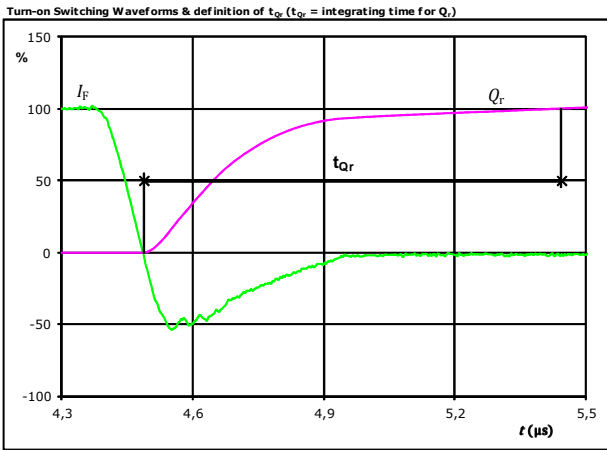

$I_F$ (100%) =	110	A
$Q_r$ (100%) =	14,82	$\mu\text{C}$
$t_{Qr}$ =	0,96	$\mu\text{s}$

**figure 9.** FWD

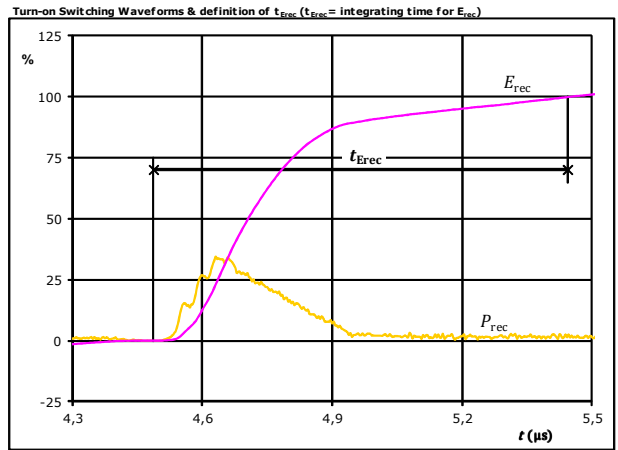


$P_{rec}$ (100%) =	66,19	kW
$E_{rec}$ (100%) =	5,16	mJ
$t_{Erec}$ =	0,96	$\mu\text{s}$



### AC Switching Characteristics


**figure 1.** IGBT

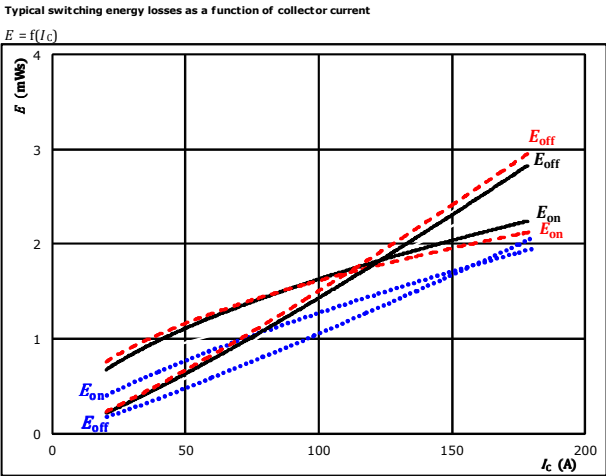

With an inductive load at

$V_{CE} = 600$ V	$T_j: 25$ °C	.....
$V_{GE} = 0/16$ V	$125$ °C	————
$R_{gon} = 1$ Ω	$150$ °C	- - - -
$R_{goff} = 1$ Ω		


**figure 2.** IGBT

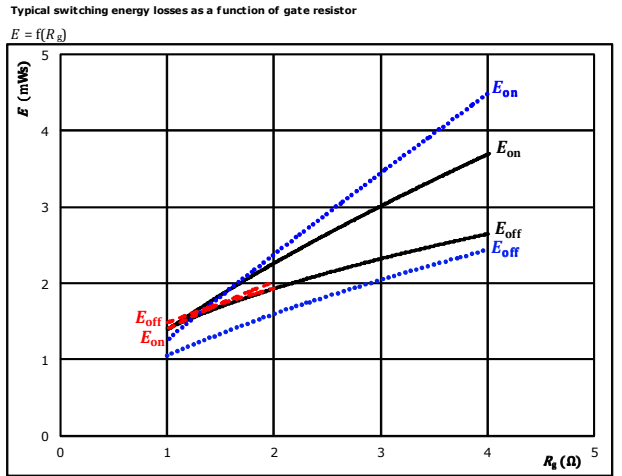

With an inductive load at

$V_{CE} = 600$ V	$T_j: 25$ °C	.....
$V_{GE} = 0/16$ V	$125$ °C	————
$I_C = 99$ A	$150$ °C	- - - -


**figure 3.** FWD

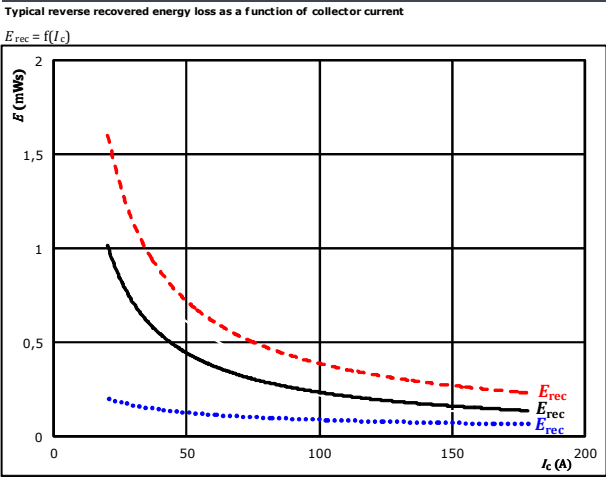

With an inductive load at

$V_{CE} = 600$ V	$T_j: 25$ °C	.....
$V_{GE} = 0/16$ V	$125$ °C	————
$R_{gon} = 1$ Ω	$150$ °C	- - - -

**figure 4.** FWD

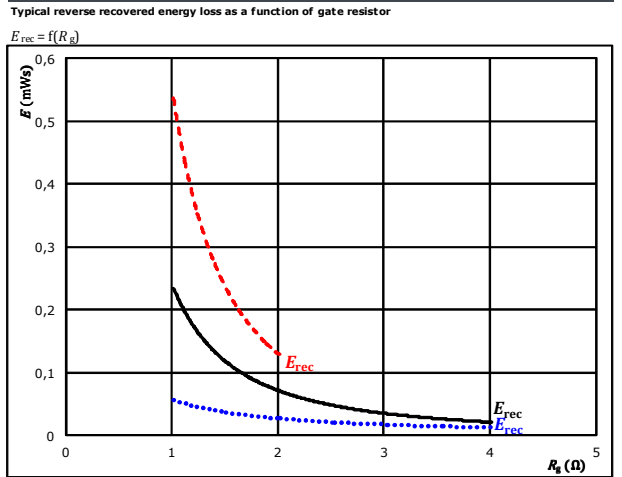

With an inductive load at

$V_{CE} = 600$ V	$T_j: 25$ °C	.....
$V_{GE} = 0/16$ V	$125$ °C	————
$I_C = 99$ A	$150$ °C	- - - -




Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

## AC Switching Characteristics

**figure 5.** IGBT

Typical switching times as a function of collector current

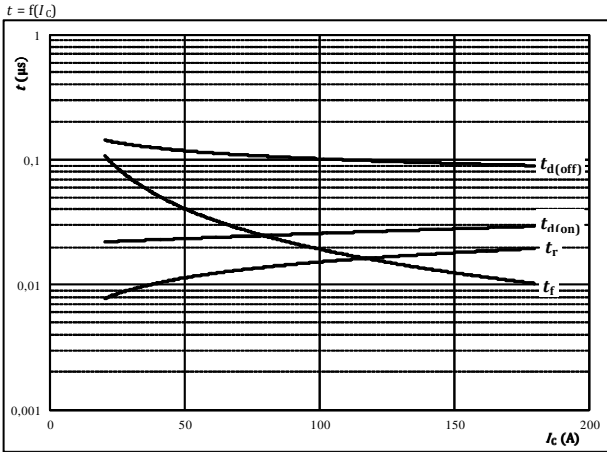


With an inductive load at

$T_j = 150$  °C  
 $V_{CE} = 600$  V  
 $V_{GE} = 0/16$  V  
 $R_{gon} = 1$  Ω  
 $R_{goff} = 1$  Ω

**figure 6.** IGBT

Typical switching times as a function of gate resistor

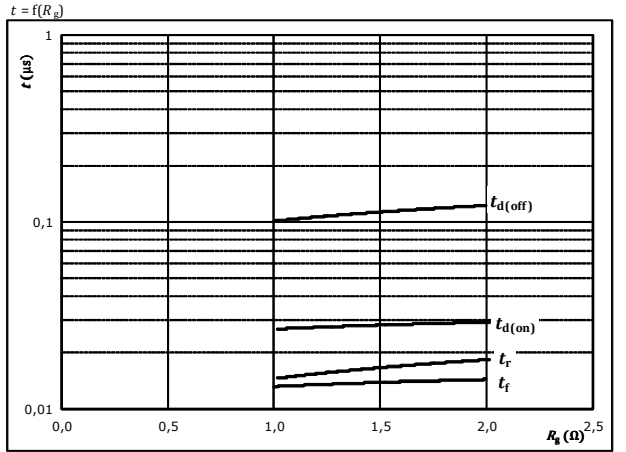


With an inductive load at

$T_j = 150$  °C  
 $V_{CE} = 600$  V  
 $V_{GE} = 0/16$  V  
 $I_c = 99$  A

**figure 7.** FWD

Typical reverse recovery time as a function of collector current

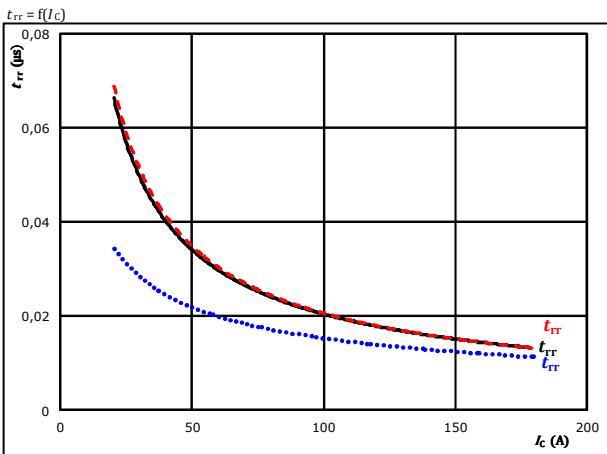


At  $V_{CE} = 600$  V  
 $V_{GE} = 0/16$  V  
 $R_{gon} = 1$  Ω

$T_j:$  25 °C (dotted blue)  
 125 °C (solid black)  
 150 °C (dashed red)

**figure 8.** FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor

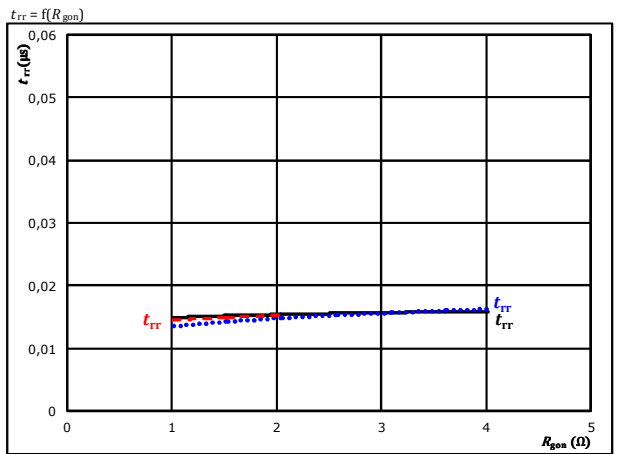

At  $V_{CE} = 600$  V  
 $V_{GE} = 0/16$  V  
 $I_c = 99$  A

$T_j:$  25 °C (dotted blue)  
 125 °C (solid black)  
 150 °C (dashed red)



Vincotech


**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

## AC Switching Characteristics

**figure 9.** FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

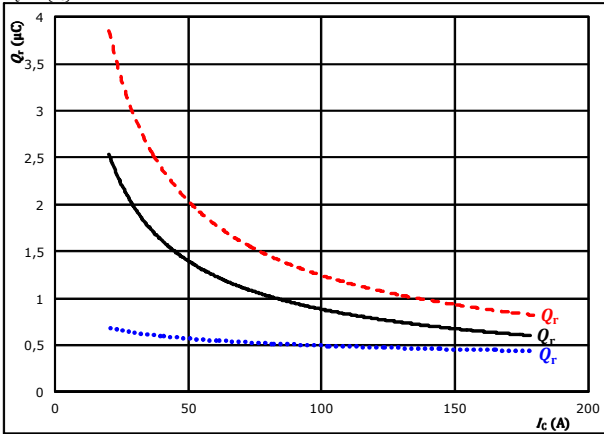


At  $V_{CE} = 600$  V  $T_j = 25$  °C .....  
 $V_{GE} = 0/16$  V  $T_j = 125$  °C ———  
 $R_{gpn} = 1$   $\Omega$   $T_j = 150$  °C - - - -

**figure 10.** FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gpn})$$

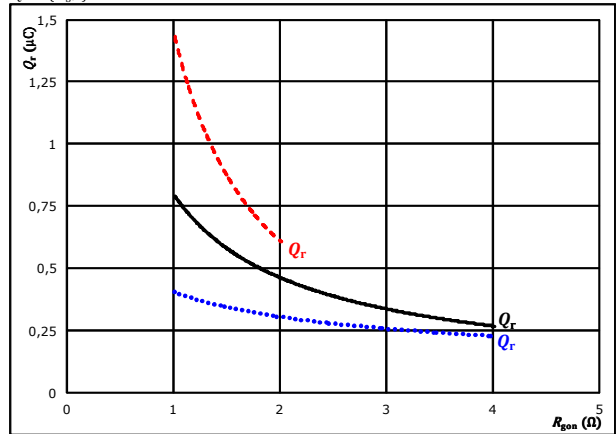


At  $V_{CE} = 600$  V  $T_j = 25$  °C .....  
 $V_{GE} = 0/16$  V  $T_j = 125$  °C ———  
 $I_c = 99$  A  $T_j = 150$  °C - - - -

**figure 11.** FWD

Typical peak reverse recovery current current as a function of collector current

$$I_{RM} = f(I_c)$$

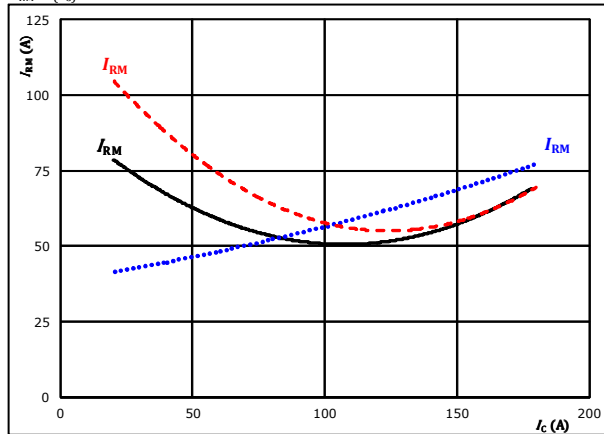


At  $V_{CE} = 600$  V  $T_j = 25$  °C .....  
 $V_{GE} = 0/16$  V  $T_j = 125$  °C ———  
 $R_{gpn} = 1$   $\Omega$   $T_j = 150$  °C - - - -

**figure 12.** FWD

Typical peak reverse recovery current current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gpn})$$

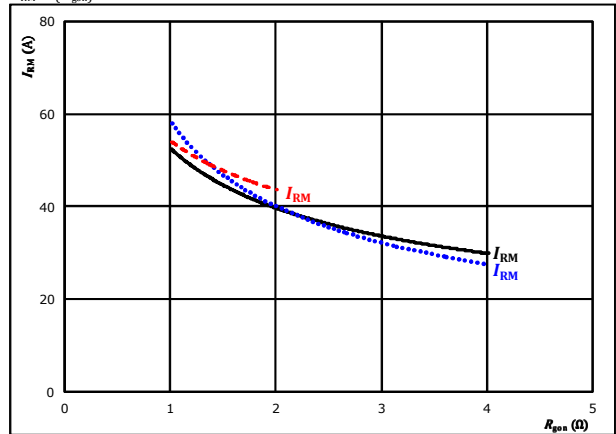


At  $V_{CE} = 600$  V  $T_j = 25$  °C .....  
 $V_{GE} = 0/16$  V  $T_j = 125$  °C ———  
 $I_c = 99$  A  $T_j = 150$  °C - - - -



### AC Switching Characteristics

**figure 13.** FWD


Typical rate of fall of forward and reverse recovery current as a function of collector current  
 $di_f/dt, di_{rr}/dt = f(I_c)$

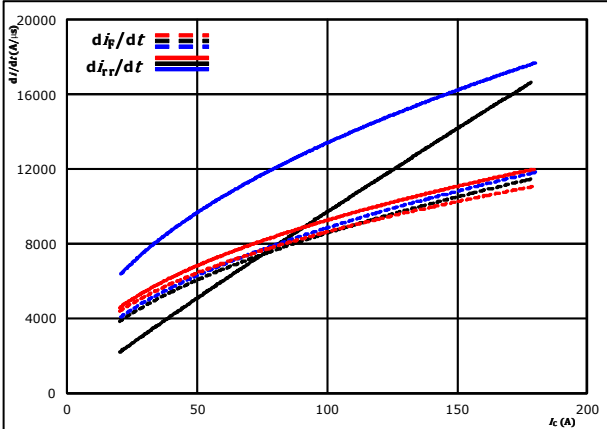

At  $V_{CE} = 600$  V  
 $V_{GE} = 0/16$  V  
 $R_{g(on)} = 1$   $\Omega$   
 $T_j = 25$  °C  
 $125$  °C  
 $150$  °C

**figure 14.** FWD

Typical rate of fall of forward and reverse recovery current as a function of IGBT turn on gate resistor  
 $di_f/dt, di_{rr}/dt = f(R_{g(on)})$

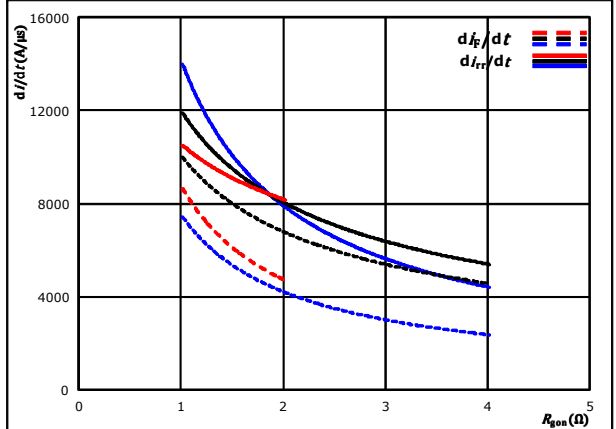


At  $V_{CE} = 600$  V  
 $V_{GE} = 0/16$  V  
 $I_c = 99$  A  
 $T_j = 25$  °C  
 $125$  °C  
 $150$  °C

**figure 15.** IGBT

Reverse bias safe operating area

$I_c = f(V_{CE})$

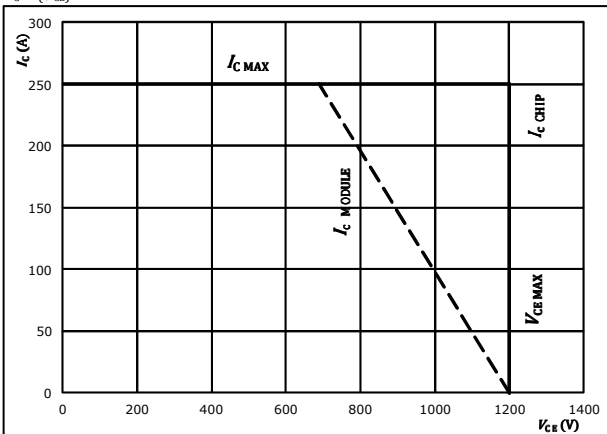

At  $T_j = 175$  °C  
 $R_{g(on)} = 1$   $\Omega$   
 $R_{g(off)} = 1$   $\Omega$




## AC Switching Definitions

**General conditions**

$T_j$	=	125 °C
$R_{gon}$	=	1 $\Omega$
$R_{goff}$	=	1 $\Omega$

**figure 1.** IGBT


Turn-off Switching Waveforms & definition of  $t_{doff}$ ,  $t_{Eoff}$  ( $t_{Eoff}$  = integrating time for  $E_{off}$ )

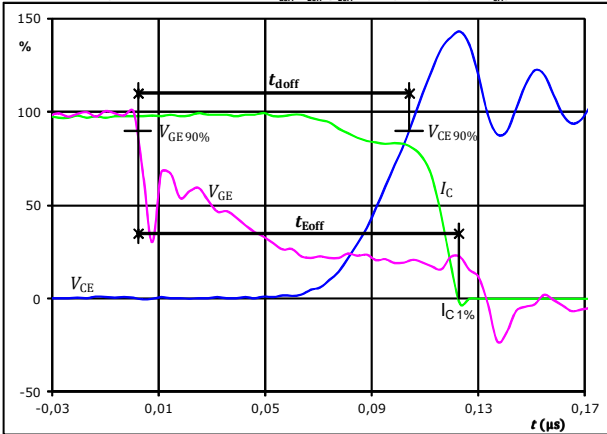

$V_{GE}(0\%) =$	0	V
$V_{GE}(100\%) =$	16	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	100	A
$t_{doff} =$	0,101	$\mu$ s
$t_{Eoff} =$	0,120	$\mu$ s

**figure 2.** IGBT


Turn-on Switching Waveforms & definition of  $t_{don}$ ,  $t_{Eon}$  ( $t_{Eon}$  = integrating time for  $E_{on}$ )

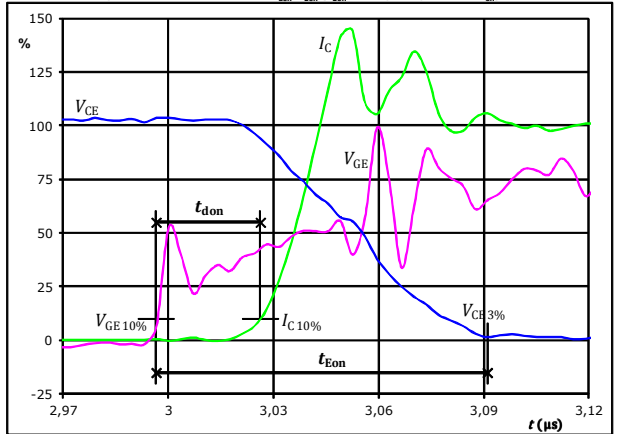

$V_{GE}(0\%) =$	0	V
$V_{GE}(100\%) =$	16	V
$V_C(100\%) =$	600	V
$I_C(100\%) =$	100	A
$t_{don} =$	0,029	$\mu$ s
$t_{Eon} =$	0,094	$\mu$ s

**figure 3.** IGBT


Turn-off Switching Waveforms & definition of  $t_f$

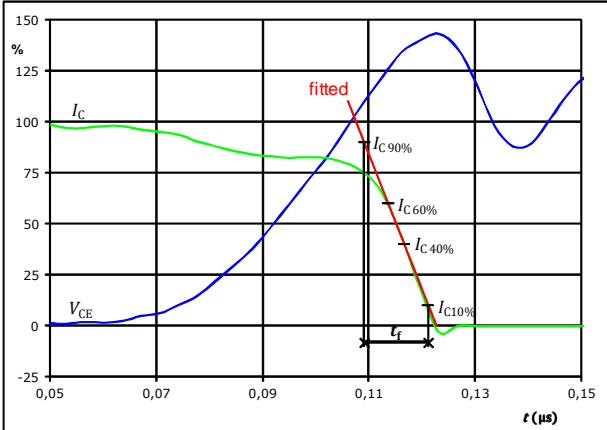

$V_C(100\%) =$	600	V
$I_C(100\%) =$	100	A
$t_f =$	0,013	$\mu$ s

**figure 4.** IGBT

Turn-on Switching Waveforms & definition of  $t_r$

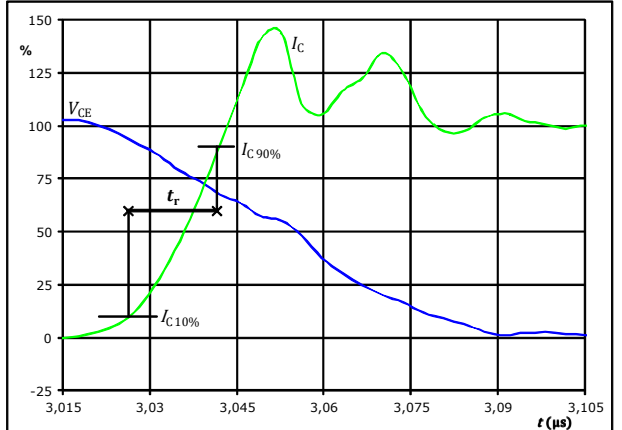

$V_C(100\%) =$	600	V
$I_C(100\%) =$	100	A
$t_r =$	0,015	$\mu$ s




Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet


## AC Switching Characteristics

figure 5. IGBT

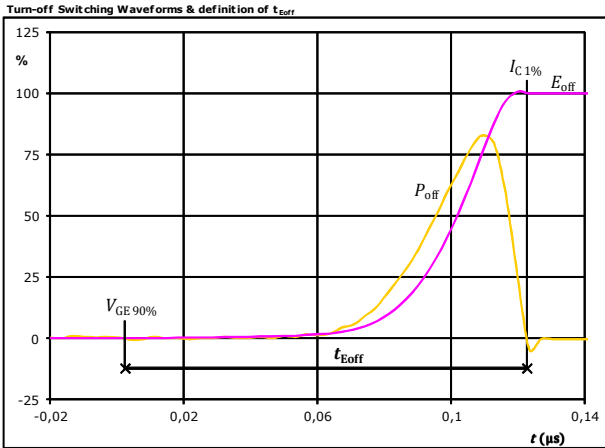


$P_{off}(100\%) = 60,18$  kW  
 $E_{off}(100\%) = 1,42$  mJ  
 $t_{Eoff} = 0,12$  µs

figure 6. IGBT

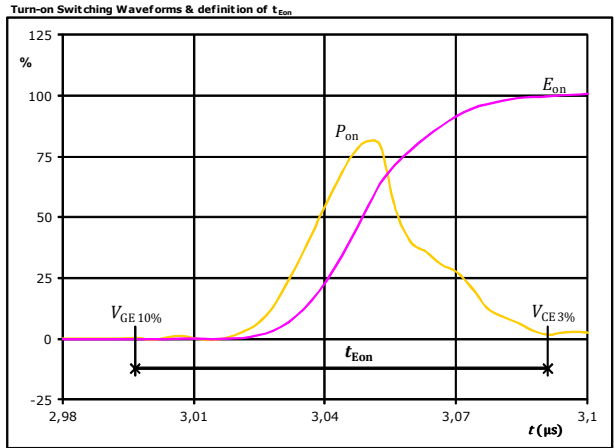

$P_{on}(100\%) = 60,18$  kW  
 $E_{on}(100\%) = 1,44$  mJ  
 $t_{Eon} = 0,09$  µs

figure 7. FWD

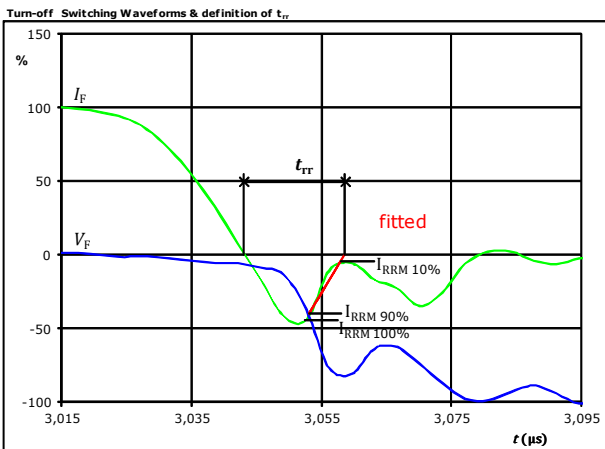

$V_F(100\%) = 600$  V  
 $I_F(100\%) = 100$  A  
 $I_{RRM}(100\%) = -51$  A  
 $t_{rr} = 0,015$  µs






Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet


## AC Switching Characteristics

figure 8. FWD

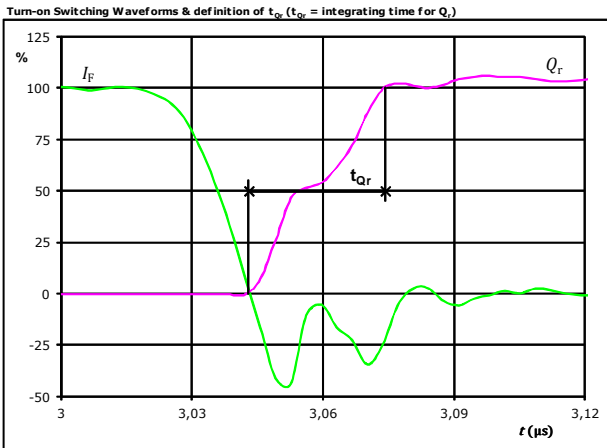

$I_F$ (100%) =	100	A
$Q_r$ (100%) =	0,79	$\mu\text{C}$
$t_{Qr}$ =	0,03	$\mu\text{s}$

figure 9. FWD

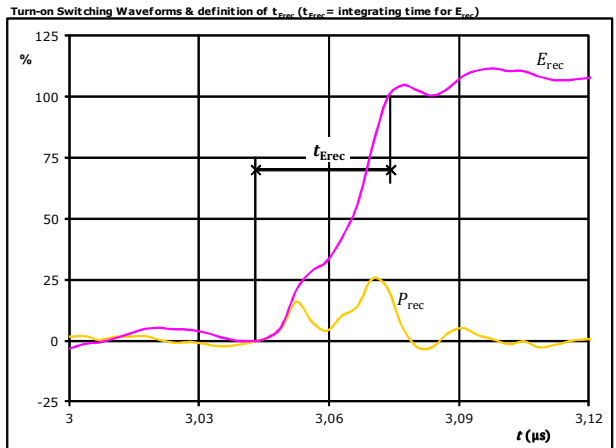

$P_{rec}$ (100%) =	60,18	kW
$E_{rec}$ (100%) =	0,22	mJ
$t_{Erec}$ =	0,03	$\mu\text{s}$



Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

**10-PH12NAB008MR02-LC59F38T**

Ordering Code & Marking																																
Version				Ordering Code																												
without thermal paste 12 mm housing with press-fit pins				10-PH12NAB008MR02-LC59F38T																												
<table border="1"> <thead> <tr> <th rowspan="2">Text</th> <th colspan="2">Name</th> <th>Date code</th> <th>UL &amp; VIN</th> <th>Lot</th> <th>Serial</th> </tr> <tr> <td colspan="2">NN-NNNNNNNNNNNNNN-TTTTTWW</td> <td>WWYY</td> <td>UL VIN</td> <td>LLLLL</td> <td>SSSS</td> </tr> </thead> <tbody> <tr> <td rowspan="2">Datamatrix</td> <td>Type&amp;Ver</td> <td>Lot number</td> <td>Serial</td> <td>Date code</td> <td></td> <td></td> </tr> <tr> <td>TTTTTWW</td> <td>LLLLL</td> <td>SSSS</td> <td>WWYY</td> <td></td> <td></td> </tr> </tbody> </table>							Text	Name		Date code	UL & VIN	Lot	Serial	NN-NNNNNNNNNNNNNN-TTTTTWW		WWYY	UL VIN	LLLLL	SSSS	Datamatrix	Type&Ver	Lot number	Serial	Date code			TTTTTWW	LLLLL	SSSS	WWYY		
Text	Name		Date code	UL & VIN	Lot	Serial																										
	NN-NNNNNNNNNNNNNN-TTTTTWW		WWYY	UL VIN	LLLLL	SSSS																										
Datamatrix	Type&Ver	Lot number	Serial	Date code																												
	TTTTTWW	LLLLL	SSSS	WWYY																												

Pin table			
Pin	X	Y	Function
1			Not assembled
2	52,9	3	DC-1
3	49,9	3	DC-1
4	52,9	0	DC-1
5	49,9	0	DC-1
6			Not assembled
7	40	0	GND1
8	37	0	GND1
9			Not assembled
10			Not assembled
11	21,8	0	GND1
12	18,9	0	GND1
13			Not assembled
14	9	0	DC+1
15	6	0	DC+1
16	3	0	DC+1
17	0	0	DC+1
18	0	9,5	G11
19	0	12,5	S11
20	12,45	17,45	G13
21	15,45	18,45	S13
22	0	28,9	Therm11
23	3	28,9	Therm12
24			Not assembled
25			Not assembled
26			Not assembled
27			Not assembled
28			Not assembled
29			Not assembled
30			Not assembled
31			Not assembled
32	40,9	28,9	Ph1
33	43,9	28,9	Ph1
34	46,9	28,9	Ph1
35	49,9	28,9	Ph1
36	52,9	28,9	Ph1
37	44,3	17,9	N1
38	41,2	14,7	S15
39	38,2	14,7	G15
40	37,95	17,9	N1
41			Not assembled
42			Not assembled
43	29,35	18,5	P1
44	26,9	15,6	P1
45			Not assembled
46			Not assembled
47			Not assembled
48			Not assembled

**Outline**

center of press-fit pinhead  
for connection parameter see the handling instruction

13.23 ± 0.1  
16.4 ± 0.5

14.45  
26.41


Tolerance of pinpositions: ±0.5mm at the end of pins  
Dimension of coordinate axis is only offset without tolerance



Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

**10-PH12NAB008MR02-LC59F38T**

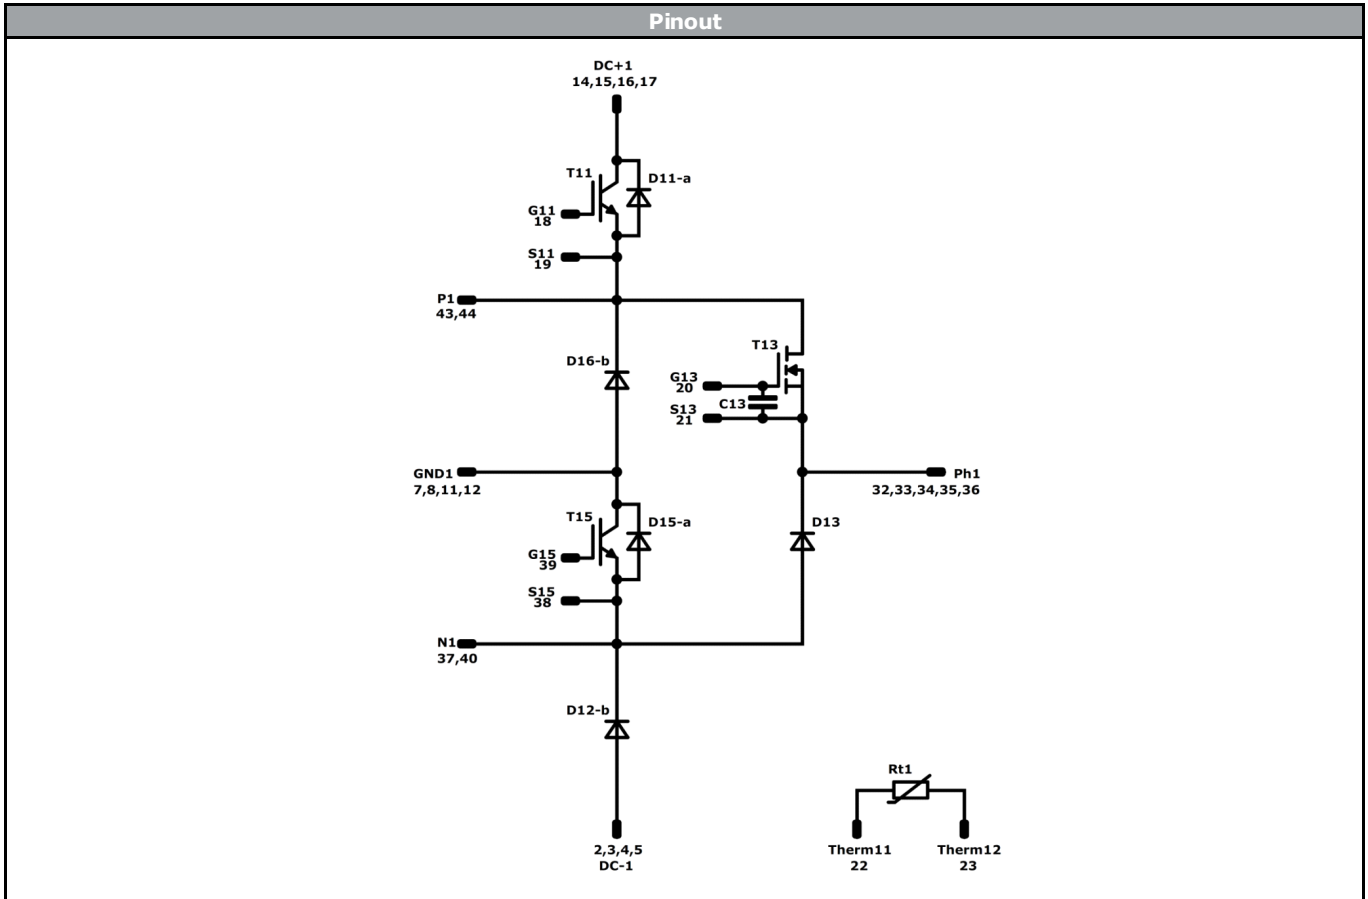

**Identification**


ID	Component	Voltage	Current	Function	Comment
T11	IGBT	1200 V	150 A	DC-Link Switch	
D12-b	FWD	1200 V	100 A	DC-Link Diode	
D11-a	FWD	1200 V	100 A	DC-Link Switch Inverse Diode	
T15	IGBT	1200 V	150 A	Neutral Point Switch	
D16-b	FWD	1200 V	150 A	Neutral Point Diode	
D15-a	FWD	1200 V	15 A	Neutral Point Switch Prot. Diode	
T13	MOSFET	1200 V	8 mΩ	AC Switch	
D13	FWD	1200 V	60 A	AC Diode	
C13	Capacitor	25 V		GS Capacitor	
Rt1	NTC			Thermistor	




Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

**10-PH12NAC008MR02-LC69F38T**

Ordering Code & Marking						
Version				Ordering Code		
without thermal paste 12 mm housing with press-fit pins				10-PH12NAC008MR02-LC69F38T		
						
Text	Name		Date code	UL & VIN	Lot	Serial
	NN-NNNNNNNNNNNNNN-TTTTTTVV		WWYY	UL VIN	LLLLL	SSSS
Datamatrix	Type&Ver	Lot number	Serial	Date code		
	TTTTTTVV	LLLLL	SSSS	WWYY		

Pin table				Outline	
Pin	X	Y	Function		
1	52,9	6	Ph2		
2	52,9	3	Ph2		
3	49,9	3	Ph2		
4	52,9	0	Ph2		
5	49,9	0	Ph2		
6	Not assembled				
7	Not assembled				
8	Not assembled				
9	31,5	0	S14		
10	28,5	1	G14		
11	Not assembled				
12	Not assembled				
13	Not assembled				
14	Not assembled				
15	Not assembled				
16	3	0	Therm21		
17	0	0	Therm22		
18	0	9,5	S16		
19	0	12,5	G16		
20	Not assembled				
21	Not assembled				
22	0	28,9	DC+2		
23	3	28,9	DC+2		
24	6	28,9	DC+2		
25	9	28,9	DC+2		
26	Not assembled				
27	18,9	28,9	GND2		
28	21,8	28,9	GND2		
29	31	28,9	GND2		
30	34	28,9	GND2		
31	Not assembled				
32	Not assembled				
33	43,9	28,9	DC-2		
34	46,9	28,9	DC-2		
35	49,9	28,9	DC-2		
36	52,9	28,9	DC-2		
37	Not assembled				
38	Not assembled				
39	Not assembled				
40	Not assembled				
41	35,9	14,9	G12		
42	35,35	17,9	S12		
43	Not assembled				
44	26,9	15,6	N2		
45	26,9	13	N2		
46	Not assembled				
47	17,8	12,3	P2		
48	15,2	12,3	P2		

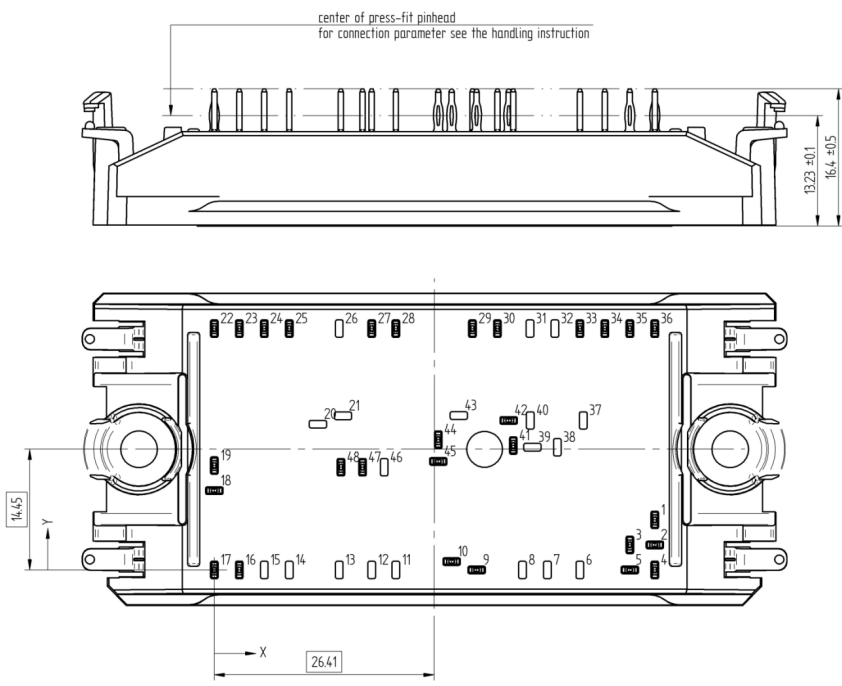center of press-fit pinhead  
for connection parameter see the handling instruction

14,45  
26,41  
19,23 ±0,1  
16,4 ±0,5


Tolerance of pinpositions: ±0,5mm at the end of pins  
Dimension of coordinate axis is only offset without tolerance



Vincotech

**10-PH12NAB008MR02-LC59F38T**  
**10-PH12NAC008MR02-LC69F38T**  
 target datasheet

**10-PH12NAC008MR02-LC69F38T**

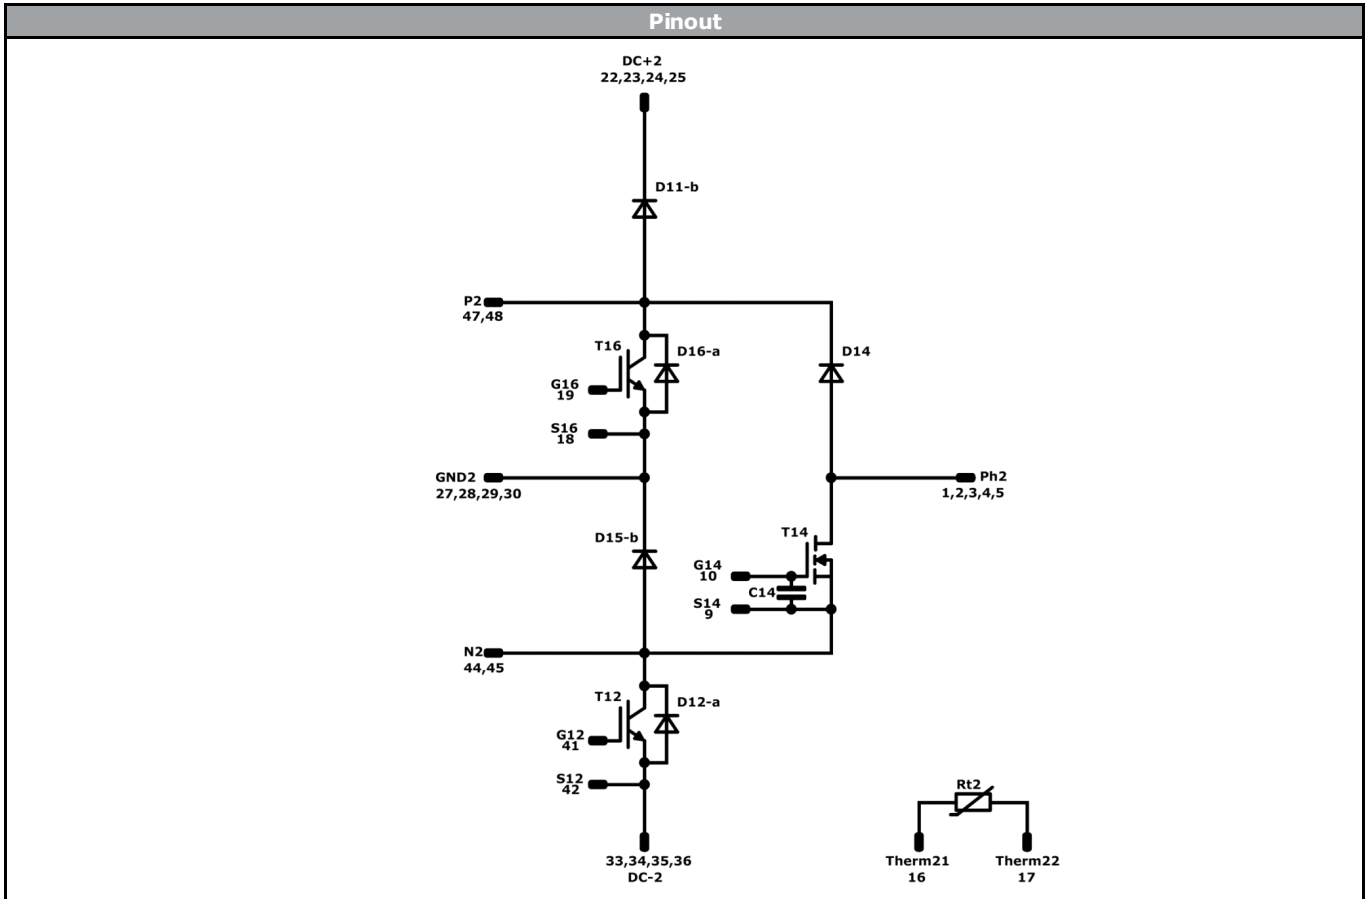

**Identification**

ID	Component	Voltage	Current	Function	Comment
T12	IGBT	1200 V	150 A	DC-Link Switch	
D11-b	FWD	1200 V	100 A	DC-Link Diode	
D12-a	FWD	1200 V	100 A	DC-Link Switch Inverse Diode	
T16	IGBT	1200 V	150 A	Neutral Point Switch	
D15-b	FWD	1200 V	150 A	Neutral Point Diode	
D16-a	FWD	1200 V	15 A	Neutral Point Switch Prot. Diode	
T14	MOSFET	1200 V	8 mΩ	AC Switch	
D14	FWD	1200 V	60 A	AC Diode	
C14	Capacitor	25 V		GS Capacitor	
Rt2	NTC			Thermistor	




Vincotech

Packaging instruction			
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ Sample

Handling instruction
Handling instructions for <i>flow 1</i> packages see vincotech.com website.

Package data
Package data for <i>flow 1</i> packages see vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. 

Document No.:	Date:	Modification:	Pages
10-PH12NAX008MR02-LCx9F38T-T2-14	19 Oct. 2017		

Product status definition		
Datasheet Status	Product Status	Definition
Target	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. The data contained is exclusively intended for technically trained staff.

**DISCLAIMER**

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

**LIFE SUPPORT POLICY**

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Vincotech\(威科\)](#)