
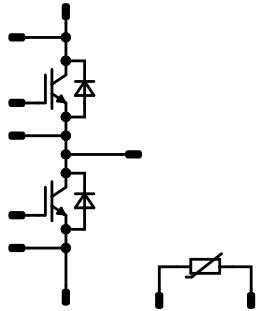




VINcoDUAL E3	1200 V / 450 A
<p data-bbox="124 443 724 474" style="text-align: center;">Features</p> <ul data-bbox="134 497 715 622" style="list-style-type: none">• IGBT Mitsubishi gen 7 technology with low V CEsat• and improved EMC behavior• New SoLid Cover Technology for higher reliability• Industry standard housing• Press-fit pin and pre-applied phase-change• Thermal Interface Material available	<p data-bbox="852 443 1452 474" style="text-align: center;">VINco E3s 17 mm housing</p> 
<p data-bbox="124 862 724 893" style="text-align: center;">Target applications</p> <ul data-bbox="134 916 715 981" style="list-style-type: none">• Industrial Drives• Power Supply• UPS	<p data-bbox="852 828 1452 860" style="text-align: center;">Schematic</p> 
<p data-bbox="124 1037 724 1068" style="text-align: center;">Types</p> <ul data-bbox="134 1090 715 1113" style="list-style-type: none">• A0-VS122PA450M7-L758F70	



Vincotech

A0-VS122PA450M7-L758F70
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Half-Bridge Switch				
Collector-emitter voltage	V_{CES}		1200	V
Collector current (DC current)	I_C	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	422	A
Repetitive peak collector current	I_{CRM}	t_p limited by T_{jmax}	900	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	792	W
Gate-emitter voltage	V_{GES}		± 20	V
Short circuit ratings	t_{SC}	$V_{GE} = 15\text{ V}$, $V_{CC} = 800\text{ V}$ $T_j = 150\text{ °C}$	9,5	μs
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$

Half-Bridge Diode

Peak repetitive reverse voltage	V_{RRM}		1200	V
Forward current (DC current)	I_F	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	346	A
Repetitive peak forward current	I_{FRM}	t_p limited by T_{jmax}	900	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	613	W
Maximum junction temperature	T_{jmax}		175	$^{\circ}\text{C}$

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	$^{\circ}\text{C}$
Operation temperature under switching condition	T_{jop}		-40...+($T_{jmax} - 25$)	$^{\circ}\text{C}$

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Isolation voltage	V'_{isol}	AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			18,1	mm
Clearance			16,2	mm
Comparative Tracking Index	CTI		≥ 200	

*100 % tested in production



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GS} [V]	V_{GE} [V]	V_{DS} [V]	I_D [A]	T_j [°C]	Min	Typ	Max	

Half-Bridge Switch

Static

Gate-emitter threshold voltage	$V_{GE(th)}$			10	0,045	25	5,4	6	6,6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		450	25 125 150		1,53 1,78 1,86	1,85 ⁽¹⁾	V
Collector-emitter cut-off current	I_{CES}		0	1200		25			300	μA
Gate-emitter leakage current	I_{GES}		20	0		25			1500	nA
Internal gate resistance	r_g							1		Ω
Input capacitance	C_{ies}							90000		pF
Output capacitance	C_{oes}		0	10		25		2640		pF
Reverse transfer capacitance	C_{res}							960		pF
Gate charge	Q_g	$V_{CC} = 600$ V	15		450	25		3000		nC

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,12		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

Dynamic

Turn-on delay time	$t_{d(on)}$					25 125 150		408 421 418		ns
Rise time	t_r					25 125 150		57 67 73		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		342 379 389		ns
Fall time	t_f					25 125 150		66,09 94,9 122,54		ns
Turn-on energy (per pulse)	E_{on}	$Q_{tFWD}=40,86$ μC $Q_{tFWD}=64,23$ μC $Q_{tFWD}=80,75$ μC				25 125 150		32,95 46,12 57,96		mWs
Turn-off energy (per pulse)	E_{off}					25 125 150		31,59 42,45 55,6		mWs



Vincotech

A0-VS122PA450M7-L758F70
datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max		
Half-Bridge Diode										
Static										
Forward voltage	V_F			450	25 125 150		1,67 1,89 1,9	2,1 ⁽¹⁾		V
Reverse leakage current	I_R	$V_T = 1200$ V			25			120		μA
Thermal										
Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)					0,16			K/W
Dynamic										
Peak recovery current	I_{RRM}				25 125 150		347,35 372,81 412,54			A
Reverse recovery time	t_{rr}				25 125 150		263,47 430,04 433,06			ns
Recovered charge	Q_r	$di/dt=8123$ A/μs $di/dt=6768$ A/μs $di/dt=9620$ A/μs	±15	600	450	25 125 150	40,86 64,23 80,75			μC
Reverse recovered energy	E_{rec}				25 125 150		15,88 24,81 31,62			mWs
Peak rate of fall of recovery current	$(di_r/dt)_{max}$				25 125 150		3020 2564 3852			A/μs



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GS} [V]	V_{GE} [V]	V_{DS} [V]	V_{CE} [V]	T_j [°C]	Min	Typ	Max	

Thermistor

Static

Rated resistance	R					25		5		kΩ
Deviation of R_{100}	$A_{R/R}$	$R_{100} = 493 \Omega$				100	-5		5	%
Power dissipation	P							245		mW
Power dissipation constant	d					25		1,4		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 2 \%$						3375		K
B-value	$B_{(25/100)}$	Tol. $\pm 2 \%$						3437		K
Vincotech Thermistor Reference									K	

⁽¹⁾ Value at chip level

⁽²⁾ Only valid with pre-applied Vincotech thermal interface material.




Half-Bridge Switch Characteristics

figure 1. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

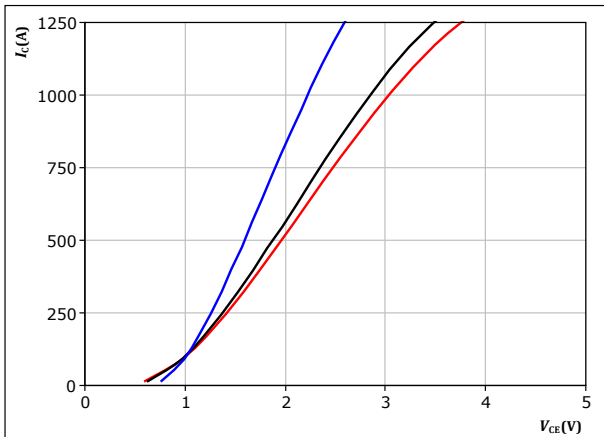


$t_p = 250 \mu s$
 $V_{GE} = 15 V$

$T_j:$ — 25 °C
— 125 °C
— 150 °C

figure 2. IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

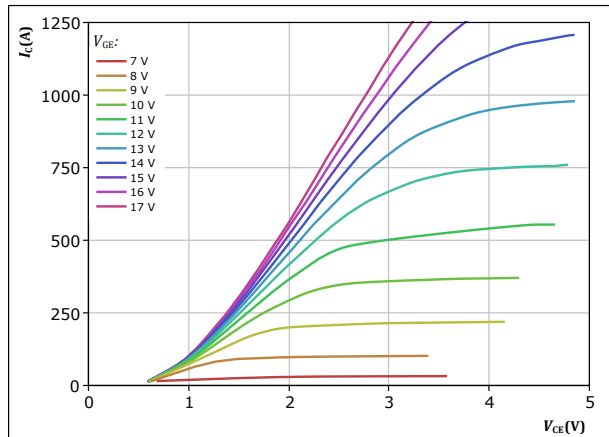


$t_p = 250 \mu s$
 $T_j = 150 \text{ °C}$
 V_{GE} from 7 V to 17 V in steps of 1 V

figure 3. IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

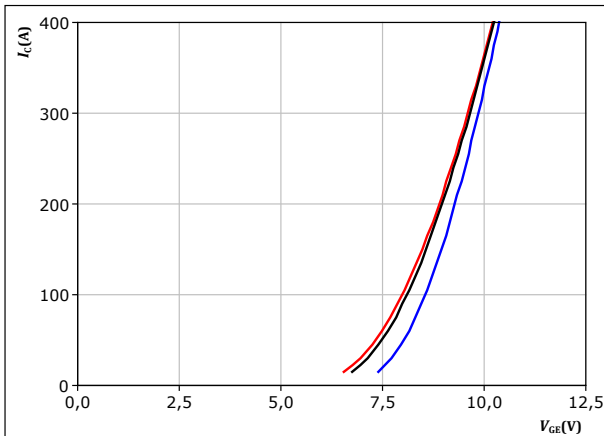


$t_p = 250 \mu s$
 $V_{CE} = 10 V$

$T_j:$ — 25 °C
— 125 °C
— 150 °C

figure 4. IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

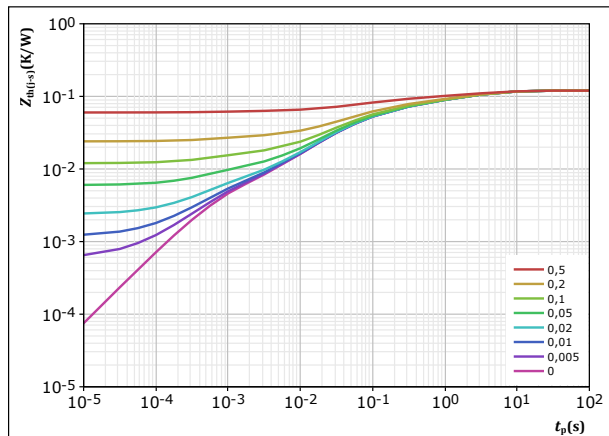

$D = t_p / T$
 $R_{th(j-s)} = 0,12 \text{ K/W}$

IGBT thermal model values

R (K/W)	τ (s)
2,37E-02	4,78E+00
2,54E-02	1,20E+00
2,85E-02	1,98E-01
2,95E-02	4,71E-02
8,84E-03	1,33E-02
4,12E-03	6,77E-04




Vincotech

Half-Bridge Switch Characteristics

figure 5. IGBT

Safe operating area

$$I_C = f(V_{CE})$$

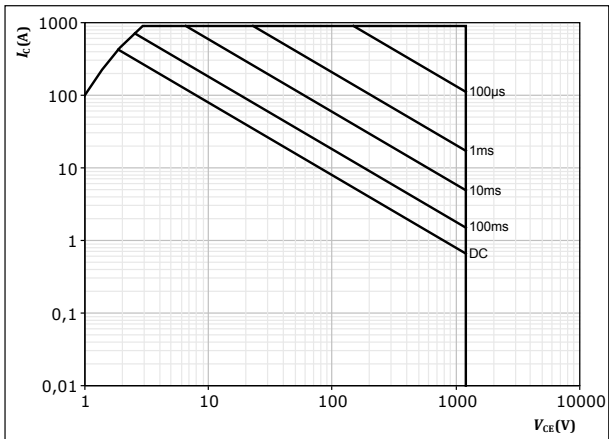

$D =$ single pulse

$T_s = 80 \text{ } ^\circ\text{C}$

$V_{CE} = 15 \text{ V}$

$T_j = T_{jmax}$



Half-Bridge Diode Characteristics

figure 6. FWD

Typical forward characteristics

$$I_F = f(V_F)$$


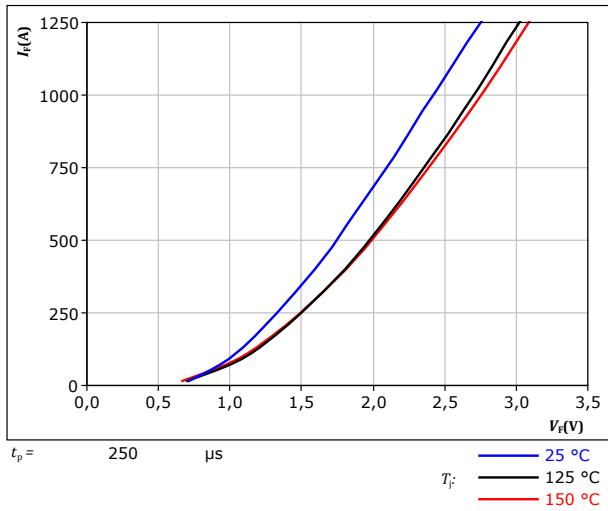


figure 7. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

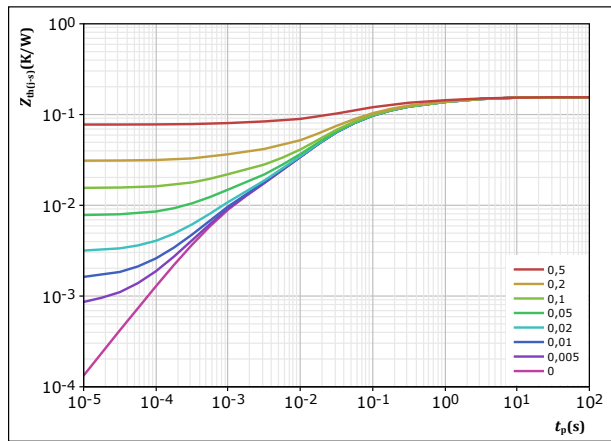

$D = t_p / T$
 $R_{th(j-s)} = 0,155$ K/W
 FWD thermal model values

R (K/W)	τ (s)
1,07E-02	4,93E+00
2,30E-02	1,02E+00
4,13E-02	1,62E-01
4,89E-02	4,06E-02
2,30E-02	1,26E-02
8,01E-03	7,94E-04




Thermistor Characteristics

figure 8. Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

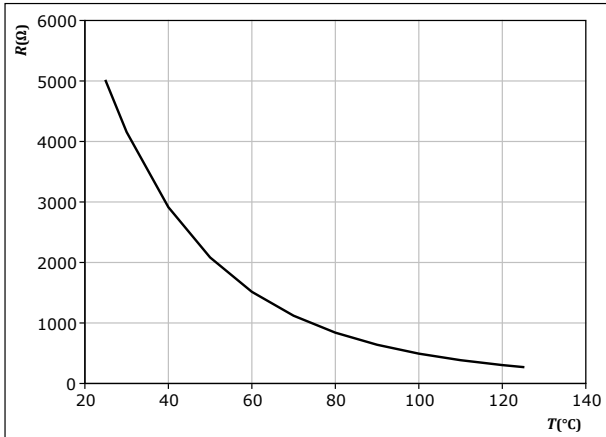




Half-Bridge Switching Characteristics

figure 9. IGBT


Typical switching energy losses as a function of collector current
 $E = f(I_c)$

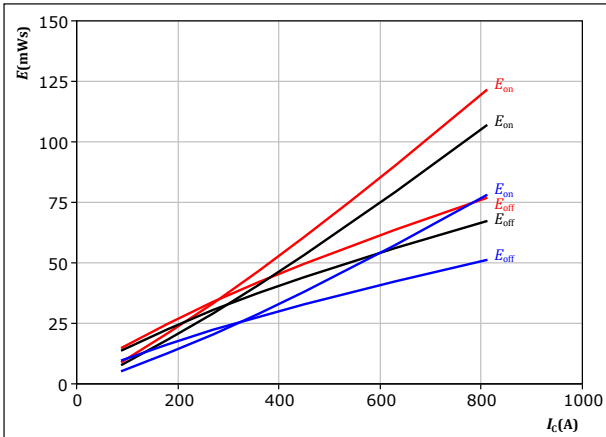

With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 1$ Ω
 $R_{goff} = 1$ Ω
 T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 10. IGBT


Typical switching energy losses as a function of gate resistor
 $E = f(R_g)$

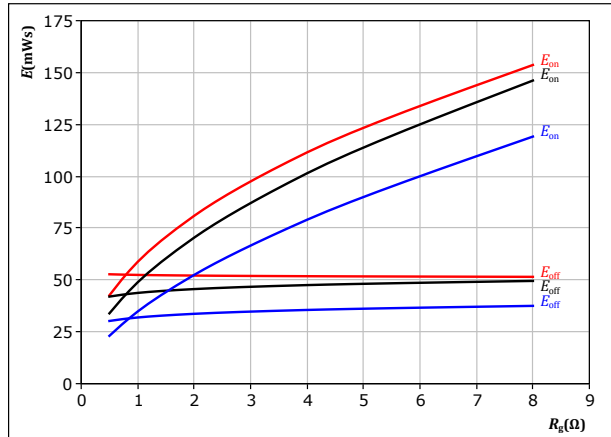

With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 450$ A
 T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 11. FWD


Typical reverse recovered energy loss as a function of collector current
 $E_{rec} = f(I_c)$

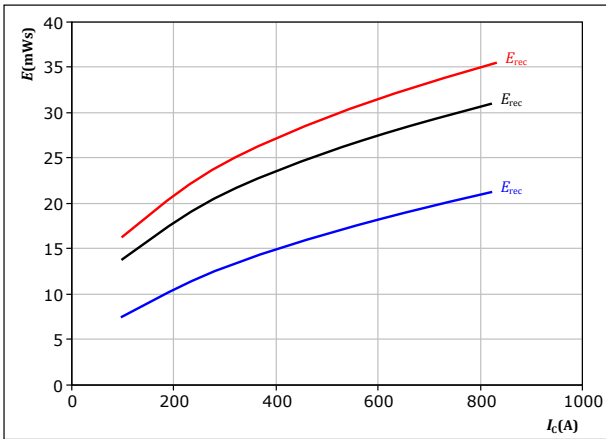

With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{gon} = 1$ Ω
 T_j : 25 °C (blue), 125 °C (black), 150 °C (red)

figure 12. FWD

Typical reverse recovered energy loss as a function of gate resistor
 $E_{rec} = f(R_g)$

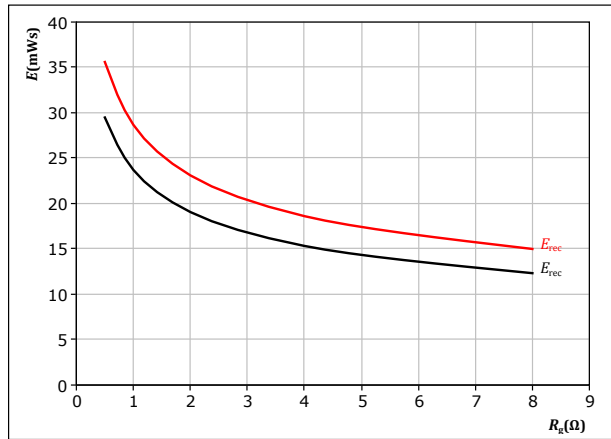


With an inductive load at
 $V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_c = 450$ A
 T_j : 125 °C (black), 150 °C (red)



Half-Bridge Switching Characteristics

figure 13. IGBT


Typical switching times as a function of collector current
 $t = f(I_c)$

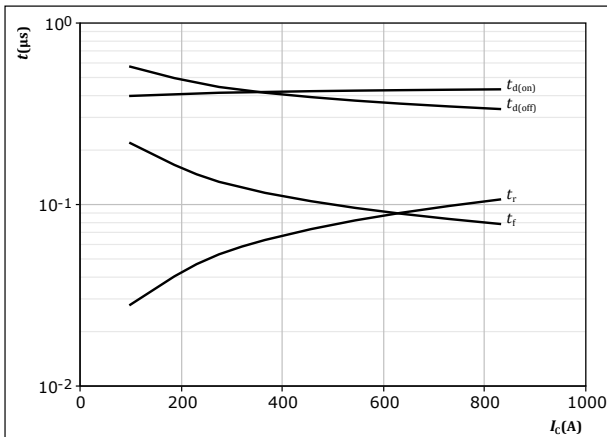

With an inductive load at
 $T_j = 150 \text{ }^\circ\text{C}$
 $V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{g(on)} = 1 \text{ } \Omega$
 $R_{g(off)} = 1 \text{ } \Omega$

figure 14. IGBT


Typical switching times as a function of gate resistor
 $t = f(R_g)$

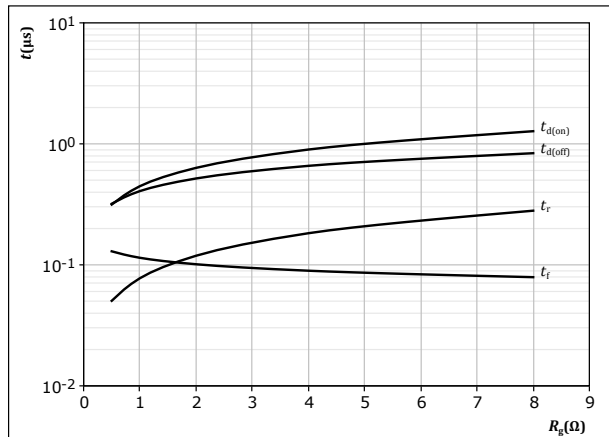

With an inductive load at
 $T_j = 150 \text{ }^\circ\text{C}$
 $V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_c = 450 \text{ A}$

figure 15. FWD


Typical reverse recovery time as a function of collector current
 $t_{rr} = f(I_c)$

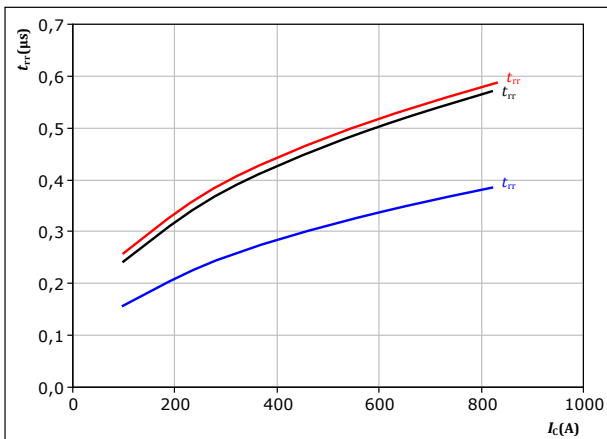

With an inductive load at
 $V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{g(on)} = 1 \text{ } \Omega$
 $T_j:$ — 25 °C
 — 125 °C
 — 150 °C

figure 16. FWD

Typical reverse recovery time as a function of IGBT turn off gate resistor
 $t_{rr} = f(R_{g(off)})$

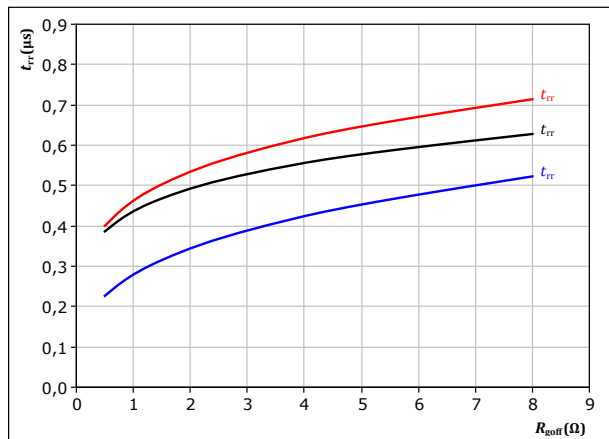

With an inductive load at
 $V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_c = 450 \text{ A}$
 $T_j:$ — 25 °C
 — 125 °C
 — 150 °C




Half-Bridge Switching Characteristics

figure 17. FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

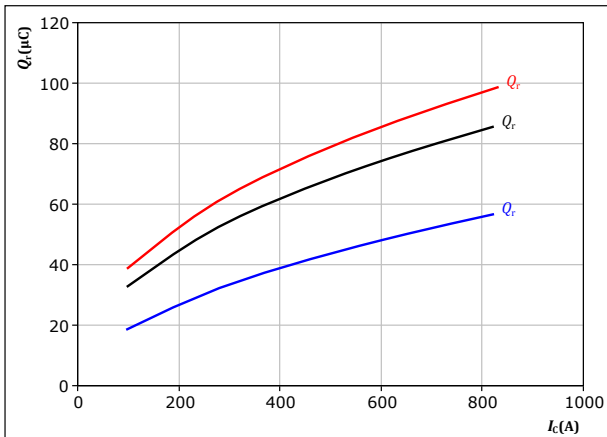

With an inductive load at


$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{goff} = 1 \ \Omega$

T_j : — 25 °C
— 125 °C
— 150 °C

figure 18. FWD

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

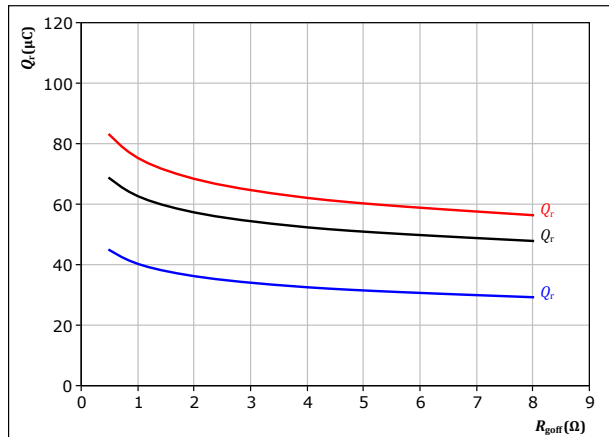

With an inductive load at


$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_c = 450 \text{ A}$

T_j : — 25 °C
— 125 °C
— 150 °C

figure 19. FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

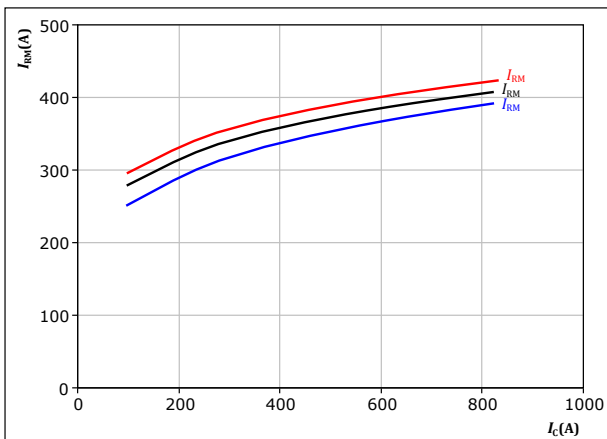

With an inductive load at


$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $R_{goff} = 1 \ \Omega$

T_j : — 25 °C
— 125 °C
— 150 °C

figure 20. FWD

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

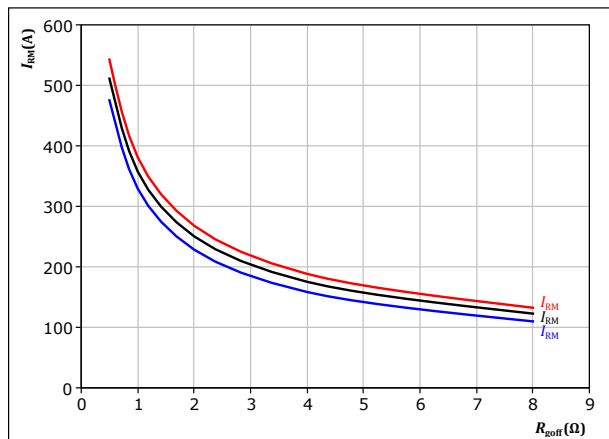

With an inductive load at

$V_{CE} = 600 \text{ V}$
 $V_{GE} = \pm 15 \text{ V}$
 $I_c = 450 \text{ A}$


T_j : — 25 °C
— 125 °C
— 150 °C



Half-Bridge Switching Characteristics

figure 21. FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current
 $di_f/dt, di_{rr}/dt = f(I_C)$

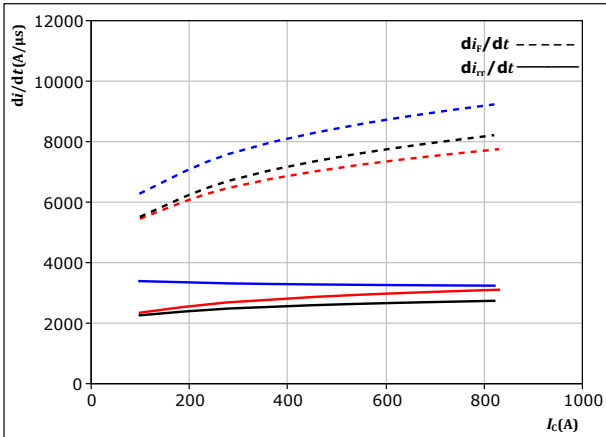


With an inductive load at

$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $R_{goff} = 1$ Ω

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 22. FWD

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor
 $di_f/dt, di_{rr}/dt = f(R_{goff})$

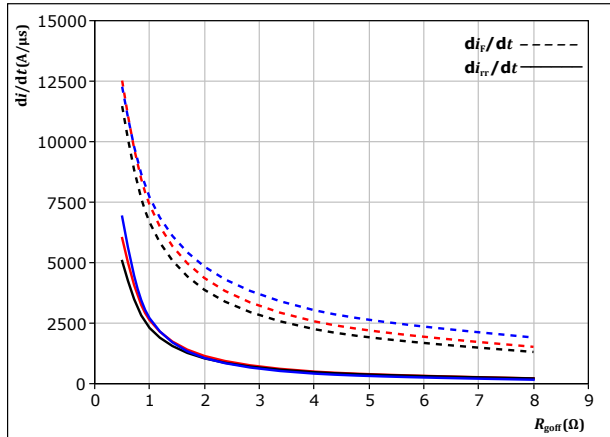

With an inductive load at


$V_{CE} = 600$ V
 $V_{GE} = \pm 15$ V
 $I_C = 450$ A

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 23. IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

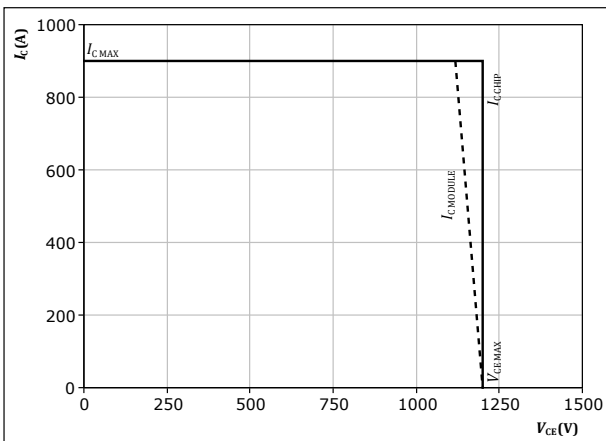

At $T_j = 150$ °C
 $R_{goff} = 1$ Ω
 $R_{goff} = 1$ Ω



Half-Bridge Switching Definitions

figure 24. IGBT

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

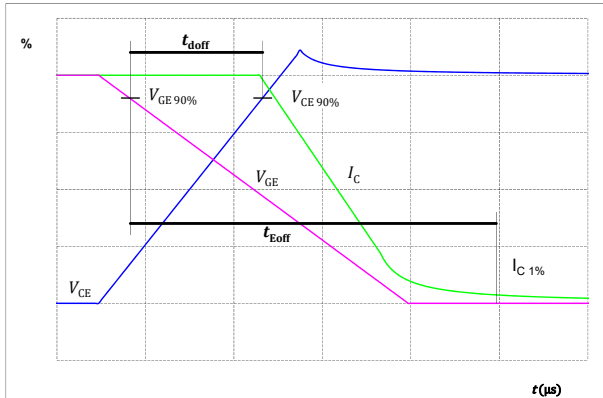


figure 25. IGBT

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

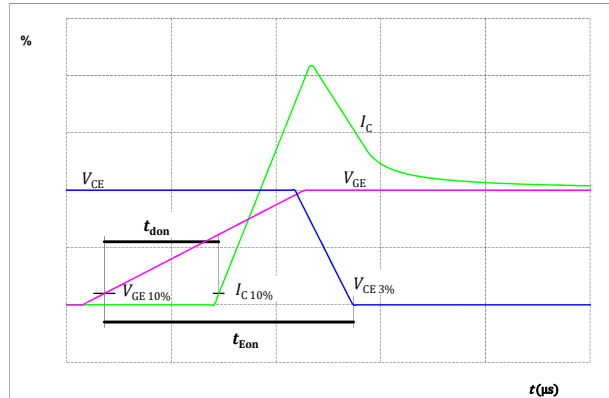


figure 26. IGBT

Turn-off Switching Waveforms & definition of t_f


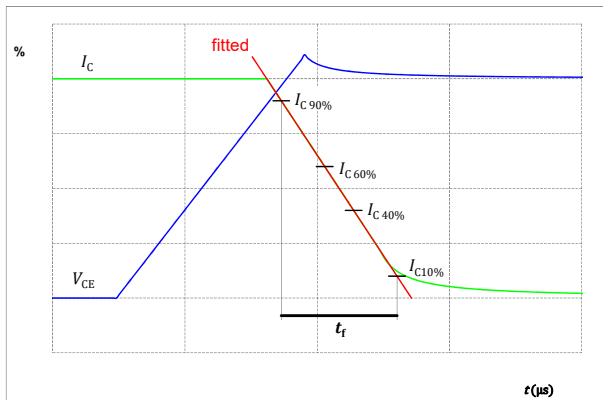


figure 27. IGBT

Turn-on Switching Waveforms & definition of t_r



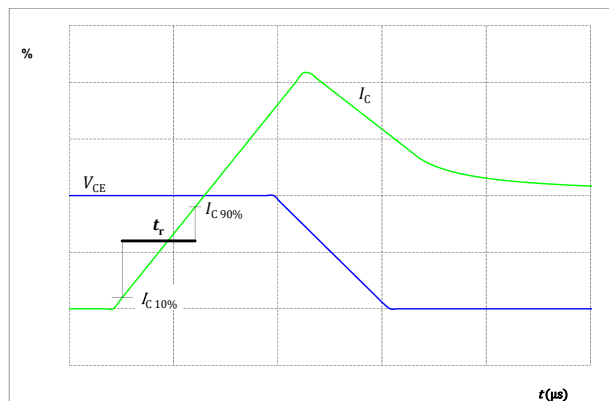

Half-Bridge Switching Definitions


figure 28. FWD

Turn-off Switching Waveforms & definition of t_{rr}



figure 29. FWD

Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)

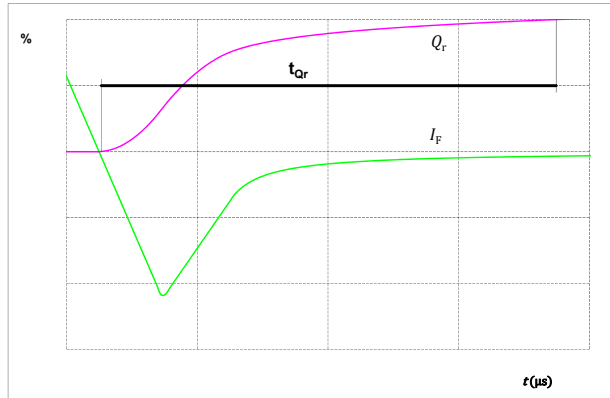




Vincotech

Ordering Code	
Version	Ordering Code
Without thermal paste	A0-VS122PA450M7-L758F70
With thermal paste (3,4 W/mK, PSX-P7)	A0-VS122PA450M7-L758F70-/3/


Marking						
	Text	Name NN-NNNNNNNNNNNNNN- TTTTTVV	VIN VIN	Date code WWYY	Lot LLLLL	Serial SSSS
	Datamatrix	Type&Ver TTTTTVV	Lot number LLLLL	Serial SSSS	Date code WWYY	

Outline				
Pin table [mm]				
Pin	X	Y	Function	
1	7,24	-0,45	Therm1	
2	11,06	-0,45	Therm2	
3	60,58	-0,45	G12	
4	64,4	-0,45	S12	
5	87,26	-0,45	C12	
6	-	-	Ph	
7	-	-	Ph	
8	37,72	57,95	G11	
9	33,92	57,95	S11	
10	-	-	DC-	
11	-	-	DC+	
12	not assembled			
13	not assembled			
14	not assembled			
15	not assembled			
16	not assembled			
17	not assembled			
18	not assembled			
19	not assembled			
20	not assembled			
21	not assembled			
22	not assembled			
23	not assembled			
24	not assembled			
25	not assembled			
26	not assembled			
27	not assembled			
28	not assembled			
29	not assembled			
30	not assembled			
31	not assembled			
32	not assembled			

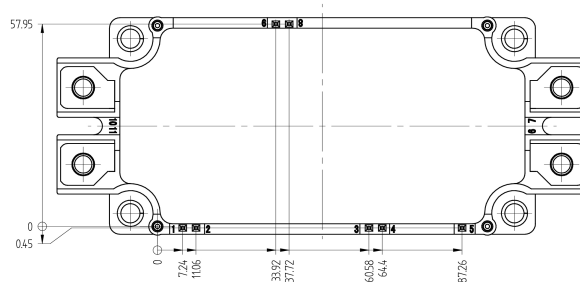



Vincotech

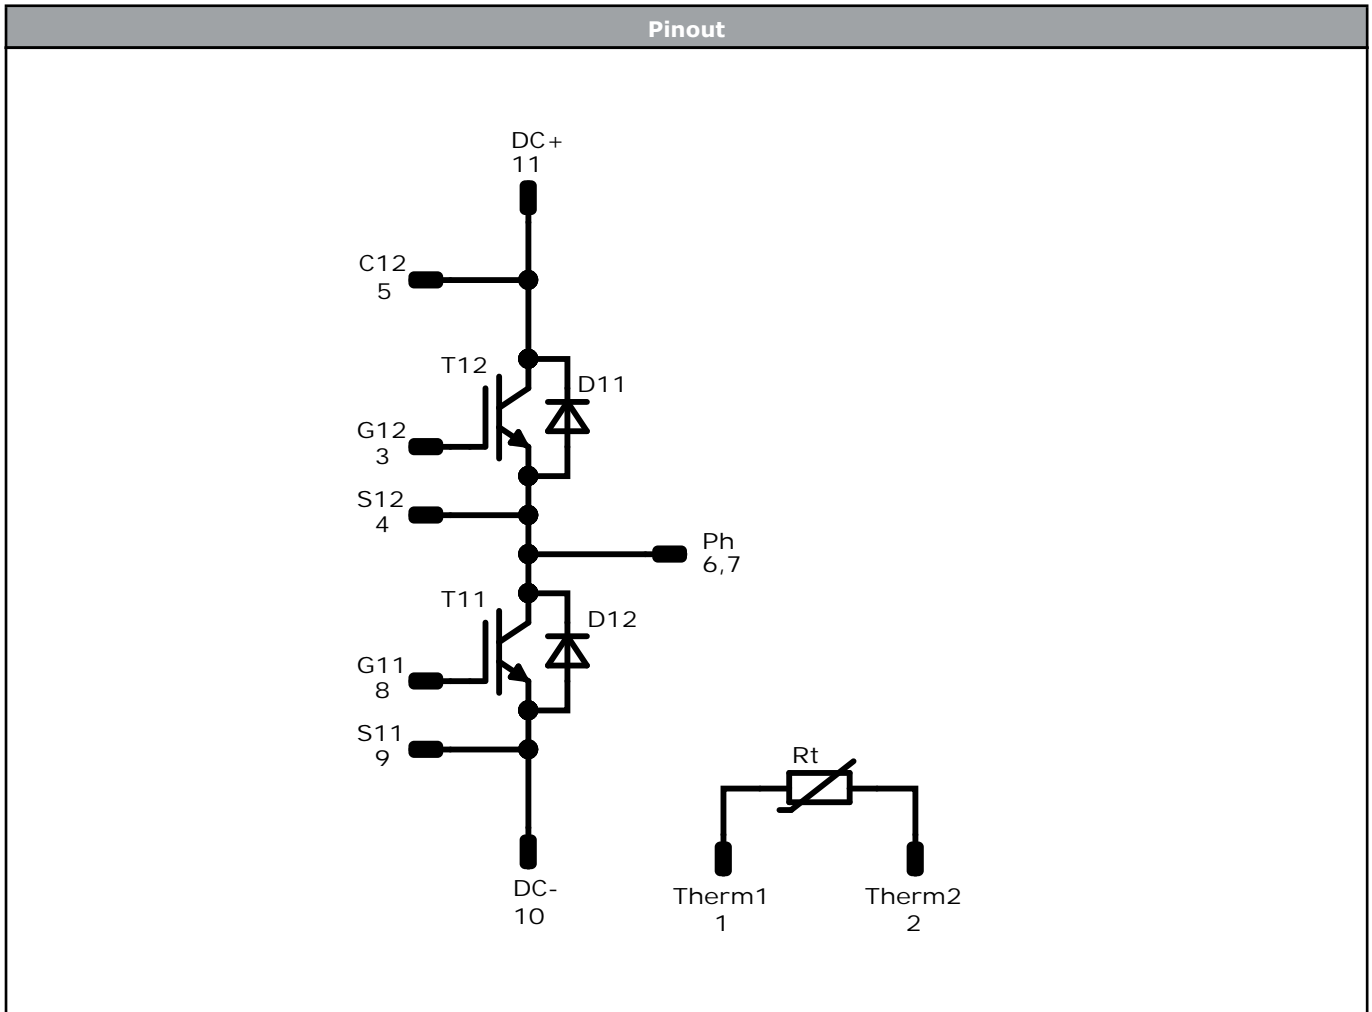

Identification					
ID	Component	Voltage	Current	Function	Comment
T11, T12	IGBT	1200 V	450 A	Half-Bridge Switch	
D11, D12	FWD	1200 V	450 A	Half-Bridge Diode	
Rt	NTC			Thermistor	




Packaging instruction				
Standard packaging quantity (SPQ) 24	>SPQ	Standard	<SPQ	Sample

Handling instruction
Handling instructions for VINco E3s packages see vincotech.com website.

Package data
Package data for VINco E3s packages see vincotech.com website.

Vincotech thermistor reference
See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. 

Document No.:	Date:	Modification:	Pages
A0-VS122PA450M7-L758F70-D5-14	27 Sep. 2021	Static characteristics of the Diode is updated R Tau pairs are updated Separated datasheet for press-fit version New datasheet format, module is unchanged	

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Vincotech\(威科\)](#)