


Features


- Reduced RFI and EMI
- Reduced Snubbing
- Extensive Characterization of Recovery Parameters

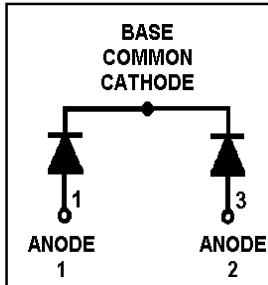

$V_R = 600V$
$V_F(\text{typ.})^{\circledcirc} = 1.2V$
$I_F(\text{AV}) = 70A$
$Q_{rr} (\text{typ.}) = 210nC$
$I_{RRM} (\text{typ.}) = 6A$
$t_{rr} (\text{typ.}) = 30ns$
$di(\text{rec})/dt (\text{typ.})^{\circledcirc} = 180A/\mu s$

Description

HEXFRED™ diodes are optimized to reduce losses and EMI/RFI in high frequency power conditioning systems. An extensive characterization of the recovery behavior for different values of current, temperature and di/dt simplifies the calculations of losses in the operating conditions. The softness of the recovery eliminates the need for a snubber in most applications. These devices are ideally suited for power converters, motors drives and other applications where switching losses are significant portion of the total losses.



SLD-61-8

Absolute Maximum Ratings (per Leg)

	Parameter	Max.	Units
V_R	Cathode-to-Anode Voltage	600	V
$I_F @ T_C = 25^\circ C$	Continuous Forward Current	56	A
$I_F @ T_C = 100^\circ C$	Continuous Forward Current	27	
I_{FSM}	Single Pulse Forward Current $\textcircled{1}$	200	μJ
E_{AS}	Non-Repetitive Avalanche Energy $\textcircled{2}$	220	
$P_D @ T_C = 25^\circ C$	Maximum Power Dissipation	150	W
$P_D @ T_C = 100^\circ C$	Maximum Power Dissipation	59	
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to +150	$^\circ C$
	Soldering Temperature, for 10 sec.	300 (0.063 in. (1.6mm) from case)	

Thermal - Mechanical Characteristics

	Parameter	Min.	Typ.	Max.	Units
R_{thJC}	Junction-to-Case, Single Leg Conducting	—	—	0.85	$^\circ C/W$
	Junction-to-Case, Both Legs Conducting	—	—	0.42	K/W
Wt	Weight	—	4.3 (0.15)	—	g (oz)

Note: $\textcircled{1}$ Limited by junction temperature

$\textcircled{2}$ $L = 100\mu H$, duty cycle limited by max T_J


$\textcircled{3}$ $125^\circ C$

Electrical Characteristics (per Leg) @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Parameter		Min.	Typ.	Max.	Units	Test Conditions	
V_{BR}	Cathode Anode Breakdown Voltage	600	—	—	V	$I_R = 100\mu\text{A}$	
V_{FM}	Max Forward Voltage	—	1.3	1.5	V	$I_F = 35\text{A}$	
		—	1.5	1.7		$I_F = 70\text{A}$	See Fig. 1
		—	1.2	1.4		$I_F = 35\text{A}, T_J = 125^\circ\text{C}$	
I_{RM}	Max Reverse Leakage Current	—	2.0	10	μA	$V_R = V_R \text{ Rated}$	
		—	0.50	2.0	mA	$T_J = 125^\circ\text{C}, V_R = 480\text{V}$	See Fig. 2
C_T	Junction Capacitance	—	68	100	pF	$V_R = 200\text{V}$	See Fig. 3
L_s	Series Inductance	—	5.5	—	nH	Lead to lead 5mm from package body	

Dynamic Recovery Characteristics (per Leg) @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Parameter		Min.	Typ.	Max.	Units	Test Conditions	
t_{rr}	Reverse Recovery Time	—	30	—	ns	$I_F = 1.0\text{A}, dI/dt = 200\text{A}/\mu\text{s}, V_R = 30\text{V}$	
t_{rr1}	—	—	70	110		$T_J = 25^\circ\text{C}$	See Fig. 5
t_{rr2}	—	—	115	180		$T_J = 125^\circ\text{C}$	
I_{RRM1}	Peak Recovery Current	—	6.0	11	A	$T_J = 25^\circ\text{C}$	$I_F = 35\text{A}$ $V_R = 200\text{V}$
		—	9.0	16		$T_J = 125^\circ\text{C}$	
Q_{rr1}	Reverse Recovery Charge	—	210	580	nC	$T_J = 25^\circ\text{C}$	
		—	520	1400		$T_J = 125^\circ\text{C}$	
$dI_{(rec)M}/dt_1$	Peak Rate of Fall of Recovery Current	—	280	—	A/ μs	$T_J = 25^\circ\text{C}$	See Fig. 6
		—	180	—		$T_J = 125^\circ\text{C}$	

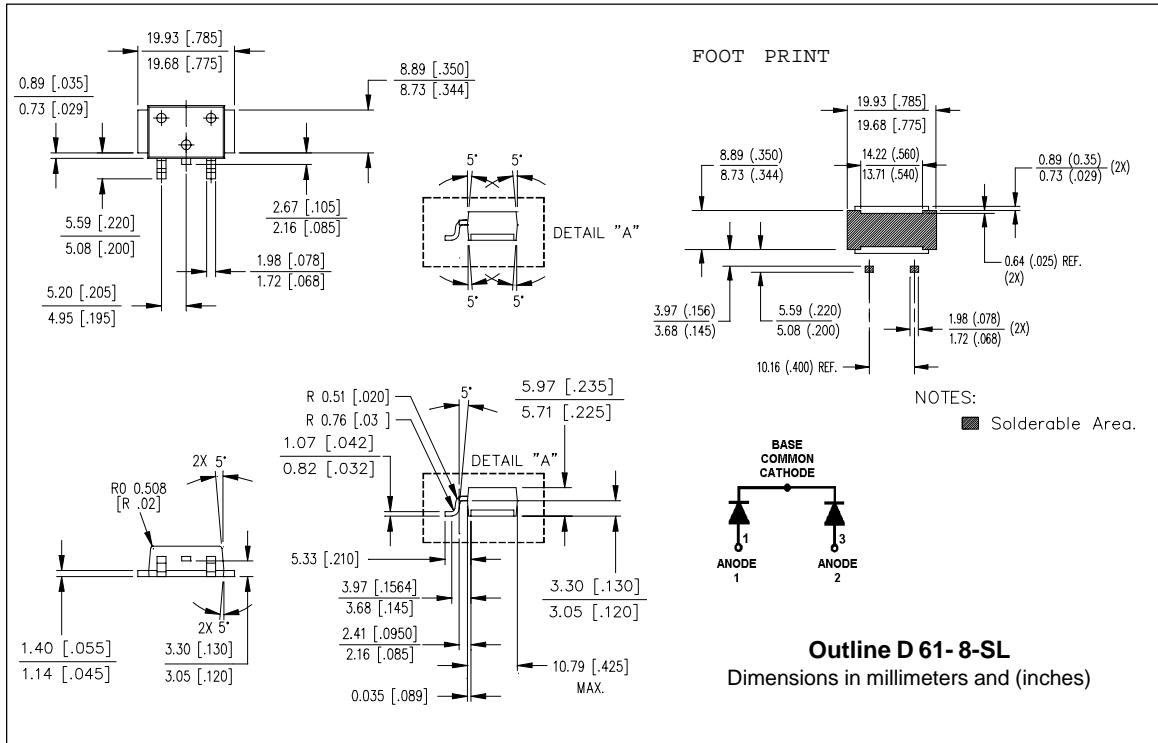

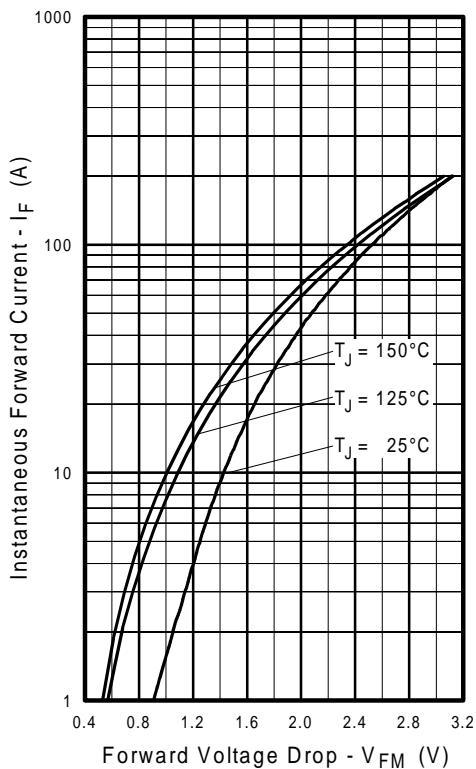


Fig. 1 - Maximum Forward Voltage Drop vs. Instantaneous Forward Current, (per Leg)

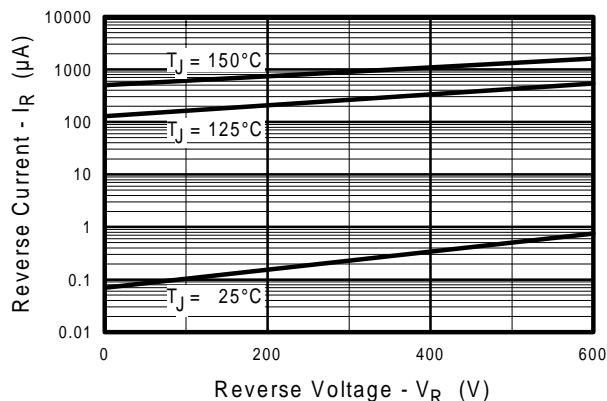


Fig. 2 - Typical Reverse Current vs. Reverse Voltage, (per Leg)

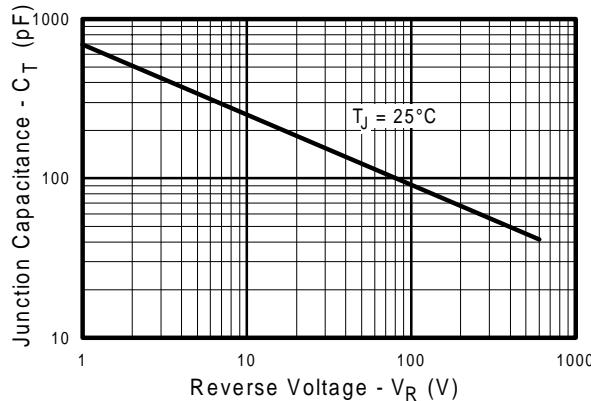


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage, (per Leg)

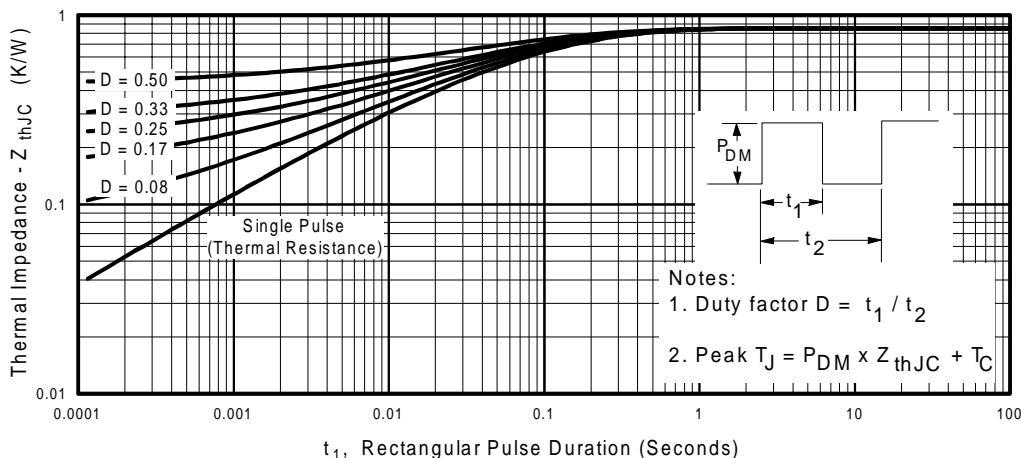


Fig. 4 - Maximum Thermal Impedance Z_{thjc} Characteristics, (per Leg)

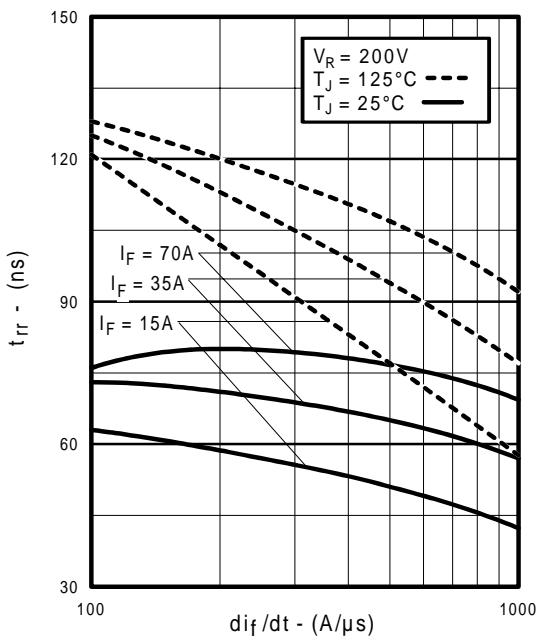


Fig. 5 - Typical Reverse Recovery vs. di_f/dt , (per Leg)

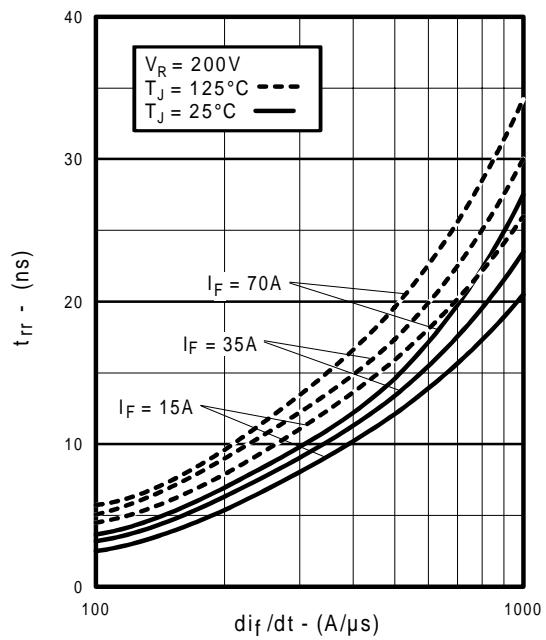


Fig. 6 - Typical Recovery Current vs. di_f/dt , (per Leg)

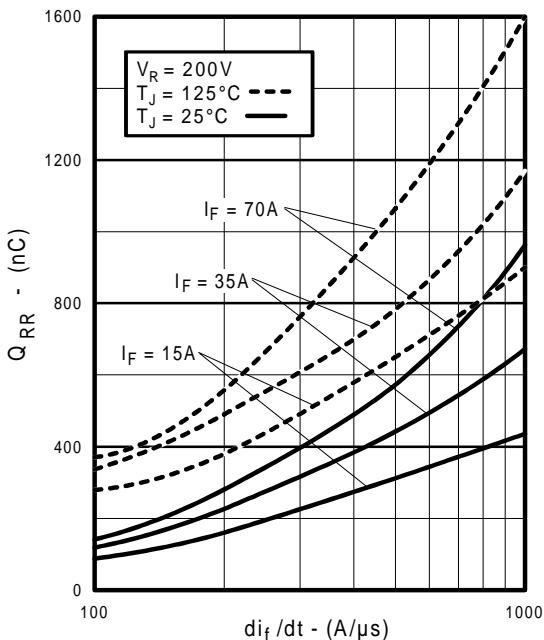


Fig. 7 - Typical Stored Charge vs. di_f/dt , (per Leg)



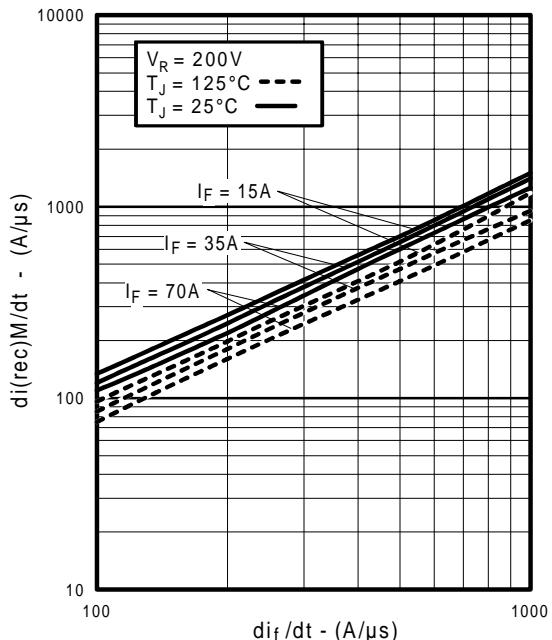


Fig. 8 - Typical $di_{(rec)M}/dt$ vs. di_f/dt , (per Leg)

REVERSE RECOVERY CIRCUIT

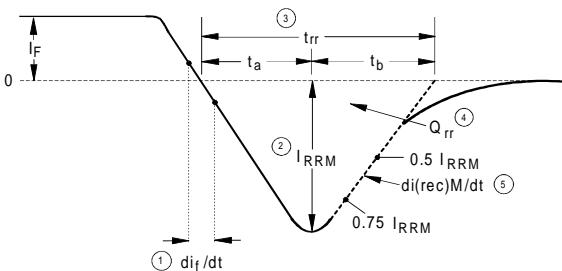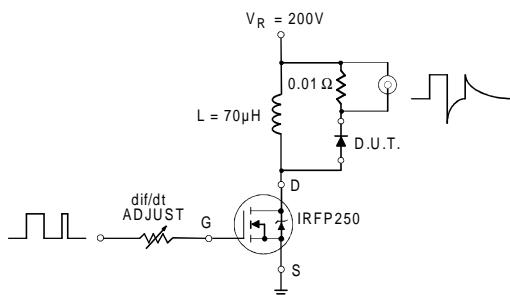

1. $\frac{di}{dt}$ - Rate of change of current through zero crossing
 2. I_{RRM} - Peak reverse recovery current
 3. t_{rr} - Reverse recovery time measured from zero crossing point of negative going I_F to point where a line passing through $0.75 I_{RRM}$ and $0.50 I_{RRM}$ extrapolated to zero current
 4. Q_{rr} - Area under curve defined by t_{rr} and I_{RRM}
 5. $\frac{dI_{(rec)}M}{dt}$ - Peak rate of change of current during t_b portion of t_{rr}
- $$Q_{rr} = \frac{t_{rr} \times I_{RRM}}{2}$$

Fig. 9 - Reverse Recovery Parameter Test Circuit

Fig. 10 - Reverse Recovery Waveform and Definitions

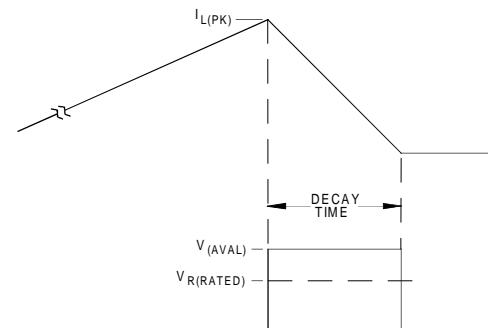
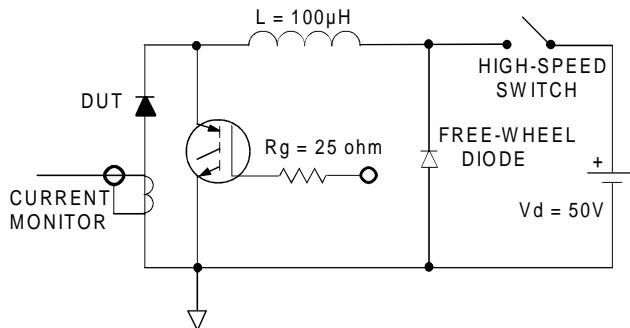


Fig. 11 - Avalanche Test Circuit and Waveforms

International
IR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.

IR CANADA: 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.

IR GERMANY: Saalburgstrasse 157, 61350 Bad Honnef. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.

IR ITALY: Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.

IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.

IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.

IR TAIWAN: 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Vishay \(威世\)](#)