# **DBZ 012058**



www.vishay.com

**Vishay Draloric** 

## **RF Power Feed-Through Capacitors** with Screw Terminals, Class 1 Ceramic



QUICK REFERENCE DATA				
DESCRIPTION	VALUE			
Ceramic Class	1			
Ceramic Dielectric	R85			
Туре	DBZ 012058			
Voltage (V <sub>p</sub> )	7500			
Min. Capacitance (pF)	200			
Max. Capacitance (pF)	200			
Mounting	Screw terminal			

### MATERIAL

Capacitor elements made from class 1 ceramic dielectric with noble metal electrodes.

Connection terminals: thread terminal, copper / brass, silver plated Allowable torque: 3.5 Nm (13 lbf in)

### FINISH

Capacitor body completely protective lacquered.

### MARKING

Type designator, capacitance value and tolerance, rated peak voltage, ceramic material code, production date code, manufacturer logo

### **FEATURES**

- Small size
- · Geometry minimizes inductance

#### **APPLICATIONS**

Filtering purposes in industrial and medical RF power equipment.

### **CAPACITANCE RANGE**

200 pF

#### **CAPACITANCE TOLERANCE**

- 10 % + 20 %

#### **CERAMIC DIELECTRICS**

R85 (TCC - 750 ppm/K)

### **RATED VOLTAGE**

 $7.5 \, \text{kV}_{p}$ 

#### **DIELECTRIC STRENGTH TEST**

12.5 kV<sub>DC</sub>, 1 minute

#### **DISSIPATION FACTOR**

Max. 0.05 % (1 MHz)

### INSULATION RESISTANCE

Min. 100 000 MΩ (at 25 °C)

### **OPERATING TEMPERATURE RANGE**

-55 °C to +100 °C

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFI Downloaded From Oneyac.com w.vishay.com/doc?91000




### Vishay Draloric

SAP PART NUMBER AND ELECTRICAL DATA							
PART NUMBER	CERAMIC	CAP. VALUES (pF)	RATED VOLTAGE (kV <sub>P</sub> )	RATED POWER <sup>(1)</sup> (kvar)	RATED CURRENT (A <sub>RMS</sub> )	FEED-THROUGH CURRENT <sup>(2)</sup> (A)	
DBZ12058VZ20172BJ1	R85	200	7.5	5.0	4.0	7.0	


#### Notes

<sup>(1)</sup> The surface temperature during operation must not exceed +100 °C

<sup>(2)</sup> DC or low frequency RMS current (< 20 kHz)

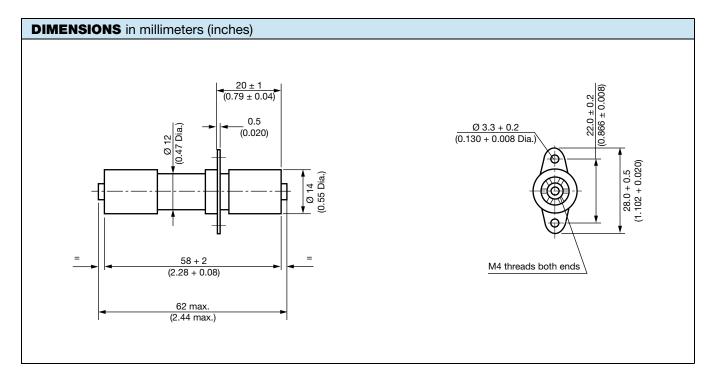

#### **DERATING DIAGRAM**

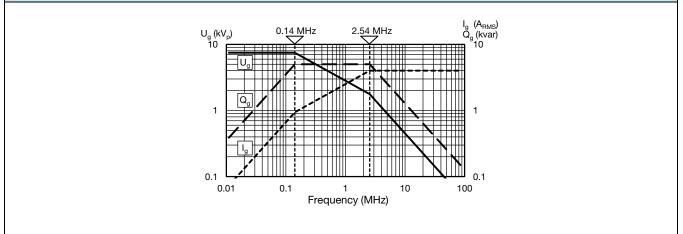

#### **RELATED DOCUMENTS** General Information www.vishav.com/doc?22071

Revision: 02-Sep-15

2

Document Number: 22101

For technical questions, contact: <a href="mailto:powcap@vishay.com">powcap@vishay.com</a> THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFI Downloaded From Oneyac.com w.vishay.com/doc?91000



Vishay

## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

单击下面可查看定价,库存,交付和生命周期等信息

>>Vishay(威世)