


## Fusible Thin Film Chip Resistors



M25SI fusible thin film chip resistors are designed for overload protection in modern professional electronics. Typical applications include automotive, telecommunication and industrial equipment.

### FEATURES

- Metal film on high quality ceramic
- Special protective top coat
- Flame retardant
- Sn solder contacts on Ni barrier layer
- Fusible resistor for constant voltage
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT

| TECHNICAL SPECIFICATIONS  |                           |
|---|---------------------------|
| DESCRIPTION   | M25SI                     |
| Imperial size   | 1206                      |
| Metric size code  | RR3216M                   |
| Resistance range  | 5 Ω to 3.9 kΩ             |
| Resistance tolerance  | ± 5 % <sup>(2)</sup>      |
| Temperature coefficient   | ± 100 ppm/K               |
| Rated dissipation, $P_{70}$ <sup>(1)</sup>                            | 0.250 W                   |
| Operating voltage, $U_{max}$ . AC <sub>RMS</sub> /DC                  | $\sqrt{P \times R}$       |
| Permissible film temperature, $\vartheta_{F max}$ . <sup>(1)</sup>    | 125 °C                    |
| Operating temperature range <sup>(1)</sup>                            | -55 °C to 125 °C          |
| Permissible voltage against ambient (insulation):<br>1 min; $U_{ins}$ | > 300 V                   |
| Failure rate: FIT <sub>observed</sub>                                 | ≤ 1 x 10 <sup>-9</sup> /h |

### Notes

- (1) Please refer to APPLICATION INFORMATION below.  
 (2) Tolerance 1 % on request.

### APPLICATION INFORMATION

When the resistor dissipates power, a temperature rise above the ambient temperature occurs, dependent on the thermal resistance of the assembled resistor together with the printed circuit board. The rated dissipation applies only if the permitted film temperature is not exceeded.

These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.

| PULSE TEST DATA            |                 |                 |
|----------------------------|-----------------|-----------------|
| Pulse power (square pulse) | 0.9 W           | 0.3 W           |
| Pulse duration $t_i$       | 100 μs          | 100 ms          |
| Pulse pause $t_p$          | 100 ms          | 1 s             |
| Number of pulses           | 10 <sup>5</sup> | 10 <sup>5</sup> |
| Drift after pulse test     | < 0.1 %         | < 0.1 %         |



| MAXIMUM RESISTANCE CHANGE AT RATED DISSIPATION                                 |           |                              |
|--|-----------|------------------------------|
| OPERATION MODE   |           | STANDARD                     |
| Rated dissipation, $P_{70}$  | M25SI1206 | 0.250 W                      |
| Operating temperature range  |           | -55 °C to 125 °C             |
| Permissible film temperature, $\vartheta_f$ max.                               |           | 125 °C                       |
| Max. resistance change at $P_{70}$ for resistance range, $ \Delta R/R $ after: | M25SI1206 | 5 $\Omega$ to 3.9 k $\Omega$ |
|  | 1000 h    | $\leq 1 \%$                  |

Note

- A suitable low thermal resistance of the circuit board assembly must be safeguarded in order to maintain the film temperature of the resistors within the specified limits. Please consider the application note "Thermal Management in Surface-Mounted Resistor Applications" ([www.vishay.com/doc?28844](http://www.vishay.com/doc?28844)) for information on the general nature of thermal resistance.

| TEMPERATURE COEFFICIENT AND RESISTANCE RANGE |                 |            |                              |          |
|--|-----------------|------------|------------------------------|----------|
| TYPE / SIZE                                  | TCR             | TOLERANCE  | RESISTANCE                   | E-SERIES |
| M25SI1206                                    | $\pm 100$ ppm/K | $\pm 5 \%$ | 5 $\Omega$ to 3.9 k $\Omega$ | E24      |

| PACKAGING   |      |          |                                     |       |       |                           |
|-------------|------|----------|-------------------------------------|-------|-------|---------------------------|
| TYPE / SIZE | CODE | QUANTITY | PACKAGING STYLE                     | WIDTH | PITCH | PACKAGING DIMENSIONS      |
| M25SI1206   | P5   | 5000     | Paper Tape acc. IEC 60286-3 Type 1a | 8 mm  | 4 mm  | $\varnothing$ 180 mm / 7" |

| PART NUMBER AND PRODUCT DESCRIPTION   |   |   |                 |   |   |                     |   |                                     |            |   |                |           |           |   |   |   |   |
|---|---|---|-----------------|---|---|---------------------|---|-------------------------------------|------------|---|----------------|-----------|-----------|---|---|---|---|
| Part Number: M251206BB9109JP500   |   |   |                 |   |   |                     |   |                                     |            |   |                |           |           |   |   |   |   |
| M   | 2 | 5 | 1               | 2 | 0 | 6                   | B | B                                   | 9          | 1 | 0              | 9         | J         | P | 5 | 0 | 0 |
| TYPE / SIZE   |   |   | VERSION         |   |   | TCR                 |   | RESISTANCE                          |            |   | TOLERANCE      |           | PACKAGING |   |   |   |   |
| M251206   |   |   | B = SI          |   |   | B = $\pm 100$ ppm/K |   | 3 digit value<br>1 digit multiplier |            |   | J = $\pm 5 \%$ |           | P5        |   |   |   |   |
| <b>Multiplier</b><br>8 = $\ast 10^{-2}$<br>9 = $\ast 10^{-1}$<br>0 = $\ast 10^0$<br>1 = $\ast 10^1$ |   |   |                 |   |   |                     |   |                                     |            |   |                |           |           |   |   |   |   |
| Product Description: M25SI 100 91R 5 % P5   |   |   |                 |   |   |                     |   |                                     |            |   |                |           |           |   |   |   |   |
| M25SI   |   |   | 100             |   |   | 91R                 |   |                                     | 5 %        |   |                | P5        |           |   |   |   |   |
| TYPE  |   |   | TCR             |   |   | RESISTANCE          |   |                                     | TOLERANCE  |   |                | PACKAGING |           |   |   |   |   |
| M25SI   |   |   | $\pm 100$ ppm/K |   |   | 91R = 91 $\Omega$   |   |                                     | $\pm 5 \%$ |   |                | P5        |           |   |   |   |   |

Note

- Products can be ordered using either the PART NUMBER or PRODUCT DESCRIPTION.



## DESCRIPTION

Production is strictly controlled and follows an extensive set of instructions established for reproducibility. A homogeneous film of metal alloy is deposited on a high grade ceramic substrate  $Al_2O_3$ . Specially designed inner contacts are deposited on both sides. A special laser is used to achieve the target value by smoothly cutting a meander groove in the resistive layer without damaging the ceramics. The resistor elements are covered by a protective coating designed for electrical, mechanical and climatic protection. The terminations receive a final pure tin on nickel plating.

The result of the determined production is verified by an extensive testing procedure. Only accepted products are laid directly into the paper tape in accordance with **IEC 60286-3 Type 1a** <sup>(1)</sup>.

## ASSEMBLY

The resistors are suitable for processing on automatic SMD assembly systems. They are suitable for automatic soldering using wave, reflow or vapor phase as shown in **IEC 61760-1** <sup>(1)</sup>. The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions. The use of conformal coating is not permitted. The resistors are RoHS-compliant; the pure tin plating provides compatibility with lead (Pb)-free and lead-containing soldering processes. Solderability is specified for 2 years after production or requalification. The permitted storage time is 20 years. The immunity of the plating against tin whisker growth has been proven under extensive testing.

## MATERIALS

Vishay acknowledges the following systems for the regulation of hazardous substances:

- IEC 62474, Material Declaration for Products of and for the Electrotechnical Industry, with the list of declarable substances given therein <sup>(2)</sup>
- The Global Automotive Declarable Substance List (GADSL) <sup>(3)</sup>
- The REACH regulation (1907/2006/EC) and the related list of substances with very high concern (SVHC) <sup>(4)</sup> for its supply chain

The products do not contain any of the banned substances as per IEC 62474, GADSL, or the SVHC list, see [www.vishay.com/how/leadfree](http://www.vishay.com/how/leadfree).

Hence the products fully comply with the following directives:

- 2000/53/EC End-of-Life Vehicle Directive (ELV) and Annex II (ELV II)
- 2011/65/EU Restriction of the Use of Hazardous Substances Directive (RoHS) with amendment 2015/863/EU
- 2012/19/EU Waste Electrical and Electronic Equipment Directive (WEEE)



Vishay pursues the elimination of conflict minerals from its supply chain, see the Conflict Minerals Policy at [www.vishay.com/doc?49037](http://www.vishay.com/doc?49037).

## Notes

- <sup>(1)</sup> The quoted IEC standards are also released as EN standards with the same number and identical contents.
- <sup>(2)</sup> The IEC 62474 list of declarable substances is maintained in a dedicated database, which is available at <http://std.iec.ch/iec62474>.
- <sup>(3)</sup> The Global Automotive Declarable Substance List (GADSL) is maintained by the American Chemistry Council and available at [www.gadsl.org](http://www.gadsl.org).
- <sup>(4)</sup> The SVHC list is maintained by the European Chemical Agency (ECHA) and available at <http://echa.europa.eu/candidate-list-table>.




FUNCTIONAL PERFORMANCE

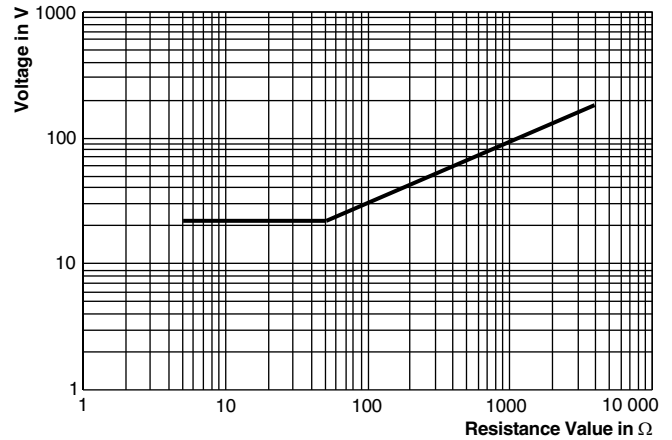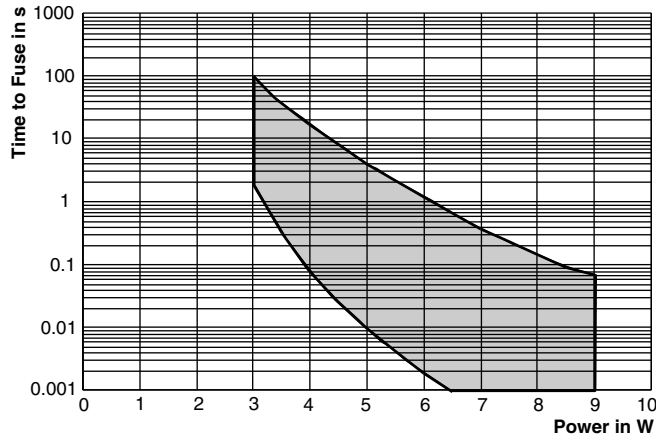


Fusing Performance

Maximum Applicable Voltage after Fusing

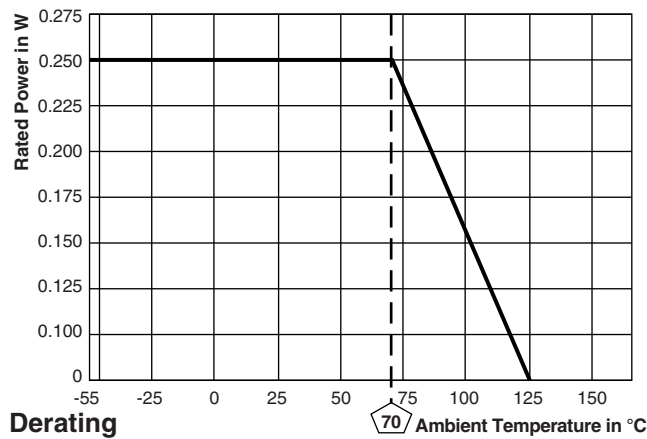

Derating

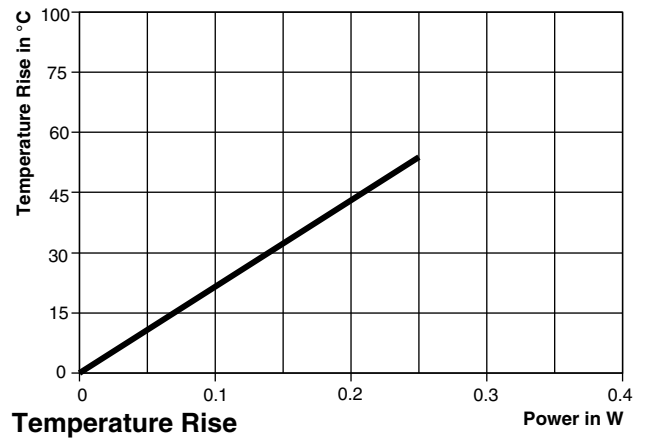

Temperature Rise



TESTS AND REQUIREMENTS

All tests are carried out in accordance with the following specifications:

EN 60115-1, generic specification

EN 60115-8 (successor of EN 140400), sectional specification

IEC 60068-2-xx, test methods

The table presents only the most important tests, for the full test schedule refer to the documents listed above. However, some additional tests and a number of improvements against those minimum requirements have been included.

The testing also covers most of the requirements specified by EIA/ECA-703 and JIS-C-5201-1.

The tests are carried out under standard atmospheric conditions in accordance with IEC 60068-1, 4.3, whereupon the following values are applied:

Temperature: 15 °C to 35 °C

Relative humidity: 25 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).


A climatic category LCT / UCT / 56 is applied, defined by the lower category temperature (LCT), the upper category temperature (UCT), and the duration of exposure in the damp heat, steady state test (56 days).

The components are mounted for testing on printed circuit boards in accordance with EN 60115-8, 2.4.2, unless otherwise specified.

| TEST PROCEDURES AND REQUIREMENTS |                             |   |  |                                      |
|----------------------------------|-----------------------------|---|--|--------------------------------------|
| EN 60115-1 CLAUSE                | IEC 60068-2 (1) TEST METHOD | TEST  | PROCEDURE  | REQUIREMENTS PERMISSIBLE CHANGE (ΔR) |
|                                  |                             |   | Stability for product types:   |                                      |
|                                  |                             |   | M25SI1206  | 5 Ω to 3.9 kΩ                        |
| 4.5                              | -                           | Resistance                                  | -  | ± 5 % R                              |
| 4.8                              | -                           | Temperature coefficient                     | At (20 / -55 / 20) °C and (20 / 125 / 20) °C   | ± 100 ppm/K                          |
| 4.25.1                           | -                           | Endurance at 70 °C: standard operation mode | $U = \sqrt{P_{70} \times R} \leq U_{max.};$ whichever is the less severe; 1.5 h on; 0.5 h off; 70 °C; 1000 h | ≤ ± 1 % R                            |
| 4.25.3                           | -                           | Endurance at upper category temperature     | 125 °C; 1000 h   | ≤ ± 1 % R                            |
| 4.24                             | 78 (Cab)                    | Damp heat, steady state                     | (40 ± 2) °C; 56 days; (93 ± 3) % RH  | ≤ ± 0.5 % R                          |
| 4.19                             | 14 (Na)                     | Rapid change of temperature                 | 30 min at LCT; 30 min at UCT; LCT = -55 °C; UCT = 125 °C   | ≤ ± 0.2 % R                          |
| 4.18                             | 58 (Td)                     | Resistance to soldering heat                | Solder bath method; (260 ± 5) °C; (10 ± 1) s   | ≤ ± 0.2 % R                          |

Note


(1) The quoted IEC standards are also released as EN standards with the same number and identical contents.

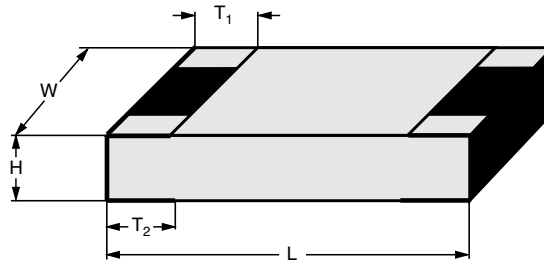**DIMENSIONS**


| DIMENSIONS AND MASS |             |                      |             |                     |                     |           |
|---------------------|-------------|----------------------|-------------|---------------------|---------------------|-----------|
| TYPE / SIZE         | H (mm)      | L (mm)               | W (mm)      | T <sub>1</sub> (mm) | T <sub>2</sub> (mm) | MASS (mg) |
| M25SI1206           | 0.55 ± 0.05 | 3.20 + 0.10 / - 0.20 | 1.60 ± 0.15 | 0.45 ± 0.20         | 0.40 ± 0.20         | 10        |

**Note**

- Resistors M25SI are marked using the three-character code system of IEC 60062 <sup>(1)</sup>, 4.2.2. on their beige protective coating.

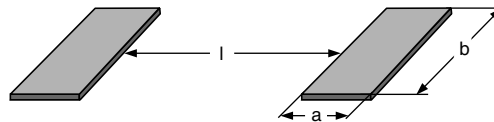**SOLDER PAD DIMENSIONS**


| RECOMMENDED SOLDER PAD DIMENSIONS |                |        |        |                  |        |        |
|-----------------------------------|----------------|--------|--------|------------------|--------|--------|
| TYPE / SIZE                       | WAVE SOLDERING |        |        | REFLOW SOLDERING |        |        |
|                                   | a (mm)         | b (mm) | l (mm) | a (mm)           | b (mm) | l (mm) |
| M25SI1206                         | 0.90           | 1.70   | 2.00   | 1.10             | 1.70   | 2.30   |

**Notes**

- The given solder pad dimensions reflect the considerations for board design and assembly as outlined e.g. in standards IEC 61188-5-x <sup>(1)</sup>, or in publication IPC-7351.

<sup>(1)</sup> The quoted IEC standards are also released as EN standards with the same number and identical contents.



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Vishay\(威世\)](#)