


Ultra High Precision Bulk Metal® Z-Foil Surface Mount Voltage Divider TCR Tracking of <0.1 ppm/°C, PCR of ±5 ppm at Rated Power and Stability of ±0.005% (50 ppm)

FEATURES

- Temperature coefficient of resistance (TCR):
Absolute: ±0.05 ppm/°C typ. (0°C to +60°C)
±0.2 ppm/°C typ. (-55°C to +125°C, +25°C Ref.)
Tracking: 0.1 ppm/°C typical
- Power coefficient tracking
- “ΔR due to self heating”: ±5 ppm at rated power
- Power rating at 70°C: entire package: 0.1 W,
each resistor: 0.05 W
- Tolerance: absolute: ±0.02%; match: 0.01%
- Ratio stability: 0.005% (0.05 W at 70°C, 2000 h)
- Resistance range: 100 Ω to 10 kΩ per resistor
- Large variety of resistance ratios: 1:100
- Foil resistors are not restricted to standard values/
ratios; specific “as required” values/ratios can be
supplied at no extra cost or delivery
(e.g., 1K234/2K345 vs. 1K/2K)
- Electrostatic discharge (ESD) up to 25 000 V
- Short time overload ≤0.005%
- Non-inductive, non-capacitive design
- Rise time: 1 ns effectively no ringing
- Current noise: <-40 dB
- Thermal EMF: 0.05 μV/°C typical
- Voltage coefficient: <0.1 ppm/V
- Non inductive: <0.08 μH
- Non hot spot design
- Terminals: silver coated copper alloy
- Compliant to RoHS directive 2002/95/EC
- Prototype quantities available in just 5 working days
or sooner. For more information, please contact:
foil@vpgsensors.com
- For better performances, please contact:
application engineering

APPLICATIONS

- Instrumentation amplifiers
- Bridge networks
- Differential amplifiers
- Ratio arms in bridge circuits
- Medical and test equipment
- Military
- Airborne, etc.



Note

* This datasheet provides information about parts that are RoHS-compliant and/or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS compliant. Please see the information/tables in this datasheet for details.



INTRODUCTION

Bulk Metal® Z-Foil technology out-performs all other resistor technologies available today for applications that require ultra-high precision and ultra-high stability.

The Z-Foil technology provides a significant reduction of the resistive element's sensitivity to ambient temperature variations (TCR) and to self heating when power is applied (power coefficient).

The DSMZ offers low TCR (both absolute and tracking), low PCR, excellent load life stability, tight tolerance match, excellent ratio stability, low thermal EMF, and low current noise – all in one package.

The DSMZ surface mount divider provides a matched pair of Bulk Metal® Z-Foil resistors in a small epoxy molded package. The electrical specification of this integrated construction offers improved performance and better real estate utilization over discrete resistors and matched pairs. Our application engineering department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us.

Figure 1 – Schematic

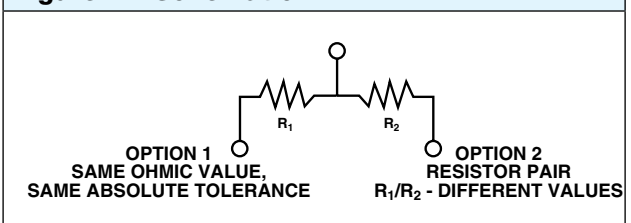


Table 1 - Model DSMZ Specifications⁽¹⁾

Resistance Values	Absolute TCR (- 55 °C to +125 °C, +25 °C Ref.) typical + max. spread	Resistance Ratio	TCR Tracking	Tolerance	
				Absolute	Match
100 Ω to 10 kΩ per resistor ⁽²⁾	±0.2 ppm/°C ±2.0 ppm/°C	R1/R2 = 1	0.5 ppm/°C	±0.02 %	0.01 %
		1 < R1/R2 ≤ 10	1.0 ppm/°C	±0.05 %	0.02 %
		10 < R1/R2 ≤ 100	2.0 ppm/°C	±0.1 %	0.05 %

Note

- ⁽¹⁾ Tighter performances are available
- ⁽²⁾ For resistance values above 10 kΩ per resistor, please contact application engineering

Figure 2 - Power Derating Curve

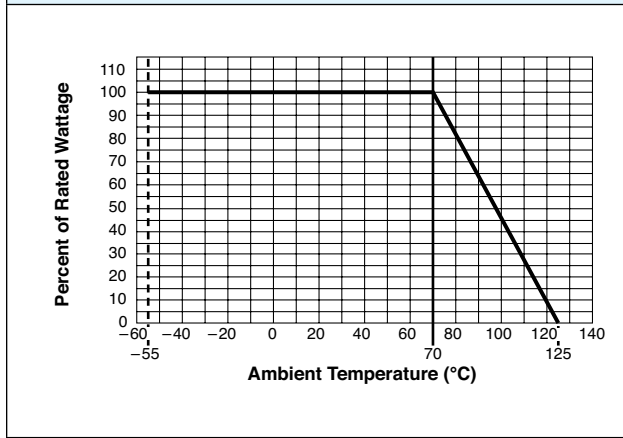


Figure 3 - Typical Resistance/Temperature Curve (for more details, see table 1)

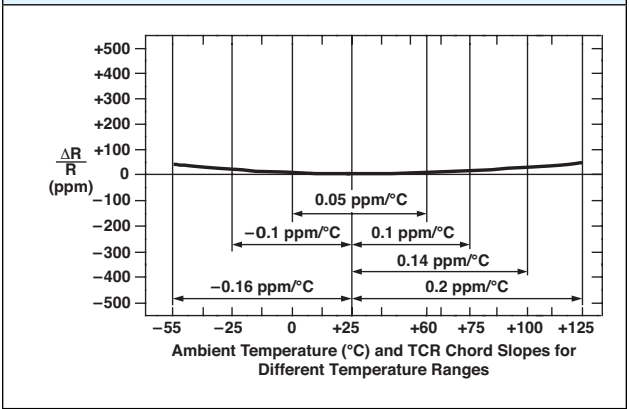


Figure 4 - Trimming to Values

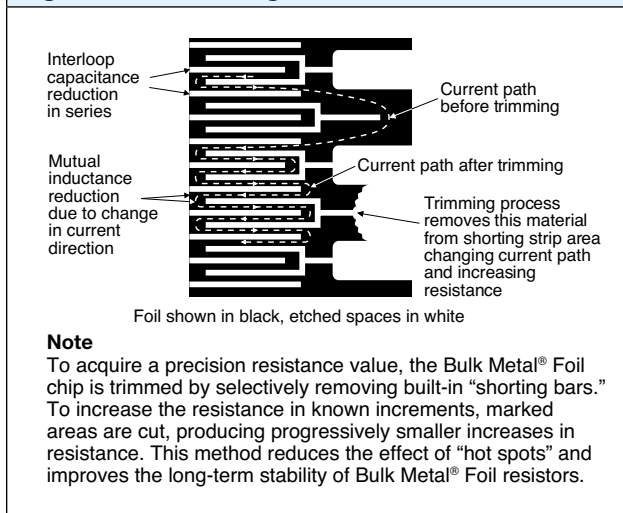


Figure 5 - Recommended Land Pattern


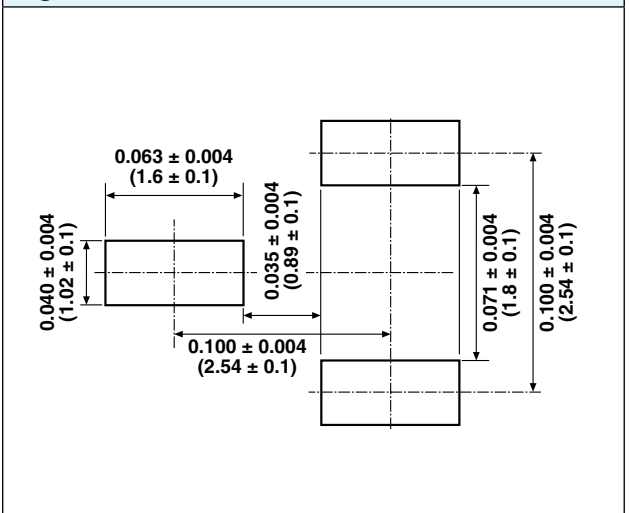


Figure 6 – Dimensions and Imprinting

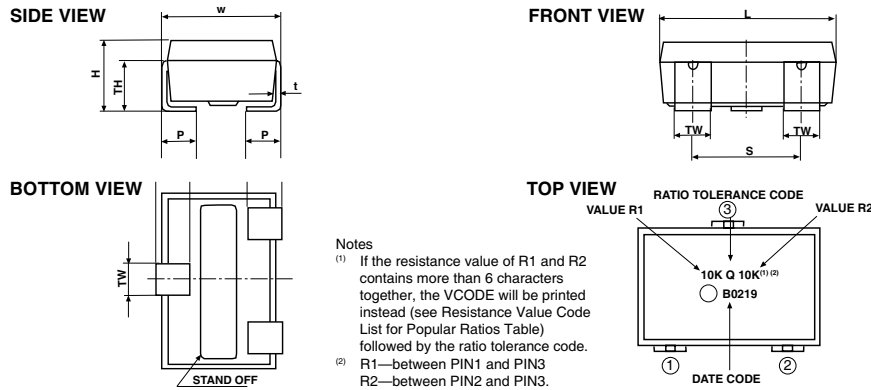


DIMENSIONS	L	W	H	P	TW	TH	S	t
INCHES	0.160±0.008	0.106±0.008	0.063±0.008	0.031±0.005	0.031±0.004	0.043±0.008	0.100±0.008	0.005±0.002
MILLIMETERS	4.06±0.20	2.69±0.20	1.60±0.20	0.79±0.13	0.79±0.10	1.09±0.20	2.54±0.20	0.13±0.05

Table 2 – Performance Specifications (test method per mil-prf-914)

SPECIFICATIONS	TYPICAL LIMITS
Power rating at 70°C	Entire package: 0.1 W Each resistor: 0.05 W
Maximum Working Voltage (each resistor)	25 V
Working Temperature Range	-65°C to +125°C
Thermal Shock 25 × (-65°C to +125°C)	ΔR = 0.01% (100 ppm) ΔRatio = 0.005% (50 ppm)
Thermal Shock 5 × (-65°C to +125°C) and Power Conditioning 1.5 rated power at 25°C, 100 hours	ΔR = 0.015% (150 ppm) ΔRatio = 0.01% (100 ppm)
DWV atmospheric pressure, 200 VAC, 1 minute	Successfully passed
Insulation Resistance 100 VDC, 1 minute	>10 ⁴ MΩ
Resistance to Soldering Heat +245°C ±5°C for 30 sec ±5 sec	ΔR = 0.01% (100 ppm) ΔRatio = 0.005% (50 ppm)
Moisture Resistance +65°C to -10°C; 90% to 98% RH; 0.1 × rated power, 240 hours	ΔR = 0.02% (200 ppm) ΔRatio = 0.005% (50 ppm)
Shock (Specified Pulse) 100 G	ΔR = 0.005% (50 ppm) ΔRatio = 0.0025% (25 ppm)
Vibration, High Frequency (10 Hz -2000 Hz), 20 G	ΔR = 0.01% (100 ppm) ΔRatio = 0.005% (50 ppm)
High Temperature Exposure 100 hours at 125°C	ΔR = 0.01% (100 ppm) ΔRatio = 0.005% (50 ppm)
Low Temperature Storage 24 hours at -65°C	ΔR = 0.005% (50 ppm) ΔRatio = 0.005% (50 ppm)
Load Life Stability 2000 hours at +70°C; rated power	ΔR = 0.005% (50 ppm) ΔRatio = 0.005% (50 ppm)
Short Time Overload 6.25 × Rated Power; 5 seconds	ΔR = 0.005% (50 ppm) ΔRatio = 0.0025% (25 ppm)
Low Temperature Operation -65°C, 45 min at P _{nom}	ΔR = 0.005% (50 ppm) ΔRatio = 0.0025% (25 ppm)
Weight	0.04 g

Table 3 – Global Part Number Information⁽¹⁾

NEW GLOBAL PART NUMBER: Y4485V0001QT9W (preferred part number format)

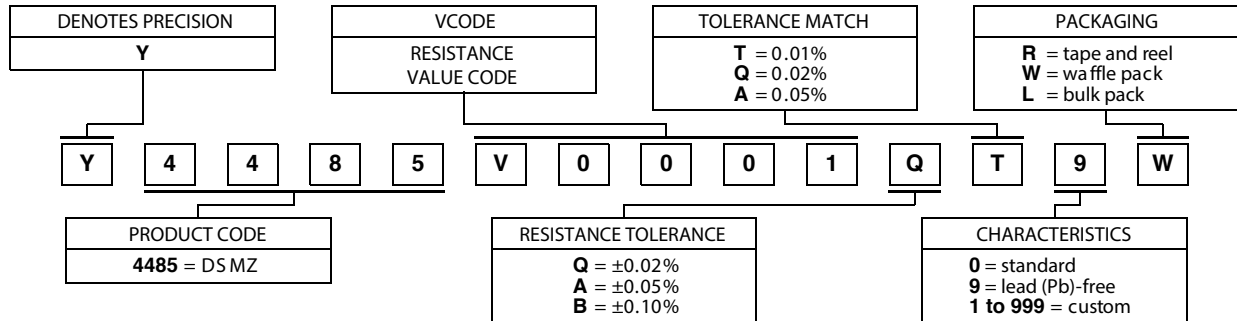

FOR EXAMPLE: ABOVE GLOBAL ORDER Y4485 V0001 Q T 9 W:
 TYPE: DSMZ
 VALUES: 10K/10K
 ABSOLUTE TOLERANCE: ± 0.02%
 TOLERANCE MATCH: 0.01%
 TERMINATION: lead (Pb)-free
 PACKAGING: waffle pack

HISTORICAL PART NUMBER: DSMZ 10K 10K TCR0.2 Q T S W (will continue to be used)

DSMZ	10K 10K	TCR0.2	Q	T	S	W
MODEL	OHMIC VALUE	TCR CHARACTERISTIC	ABSOLUTE TOLERANCE	TOLERANCE MATCH	TERMINATION	PACKAGING
	R ₁ = 10 kΩ R ₂ = 10 kΩ		Q = ±0.02% A = ±0.05% B = ±0.10%	T = 0.01% Q = 0.02% A = 0.05%	S = lead (Pb)-free B = tin/lead	T = tape and reel W = waffle pack B = bulk pack

Note

⁽¹⁾ For non-standard requests or additional values, please contact application engineering.

Table 4 – Resistance Value Code List for Popular Ratios⁽¹⁾

VCODES	R1/R2 RATIO	R1	R2	VCODES	R1/R2 RATIO	R1	R2	
V0052	100	10K	100R	V0080	2.5	1K	400R	
V0065	50	10K	200R	V0081		500R	200R	
V0066		5K	100R	V0082	2	10K	5K	
V0067	25	10K	400R	V0083		2K	1K	
V0068		5K	200R	V0084		1K	500R	
V0069	20	10K	500R	V0085		400R	200R	
V0070		2K	100R	V0086		200R	100R	
V0071	10	10K	1K	V0087	1.25	500R	400R	
V0072		2K	200R	V0001	1	10K	10K	
V0073		1K	100R			V0002	5K	5K
V0074	5	5K	1K			V0059	2K	2K
V0075		2K	400R			V0004	1K	1K
V0076		1K	200R			V0091	500R	500R
V0077		500R	100R			V0090	400R	400R
V0246		4	10K			2K5	V0089	200R
V0078	2K		500R			V0088	100R	100R
V0079	400R		100R					

Note

⁽¹⁾ Other values available upon request.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Vishay\(威世\)](#)