

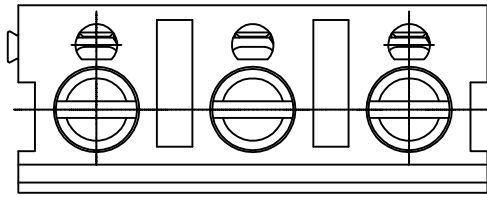


SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

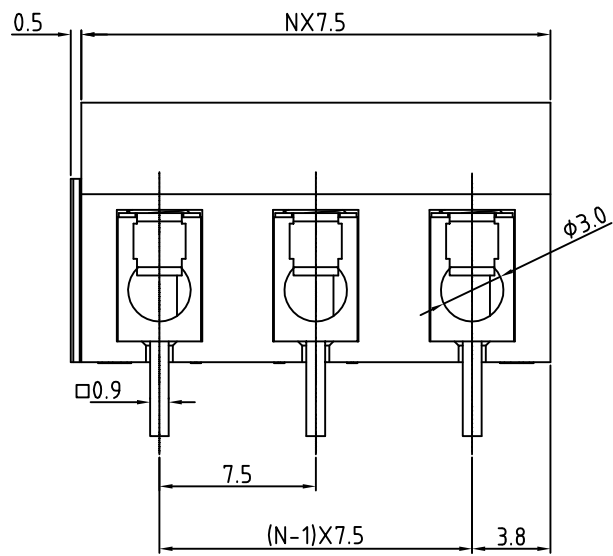


- Material**
- Terminal body
 - (metal housing): Brass(CuZn)
 - Terminal screw: Steel Zinc plating "-" slot type
 - Wire guard: Stainless steel
 - Surface of solder tail: Tin plated
 - Insulator (housing): Thermoplastic (UL94V-0)

- Electrical cULus**
- Voltage rating: 300VAC
 - Current rating: 15A
 - Wire range:
 - Solid wire(AWG): 14-22
 - Stranded wire(AWG): 14-22
 - Torque(Lb-in): 3.5
 - Screw: M3
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 2KV
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety approval: cULus
- RoHS Compliant

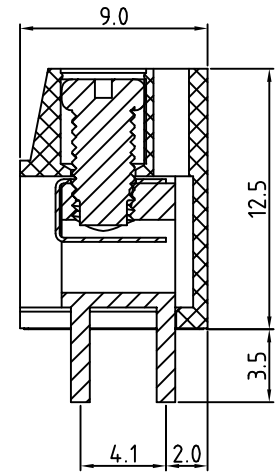

N=Number of poles

P.C.B. LAYOUT

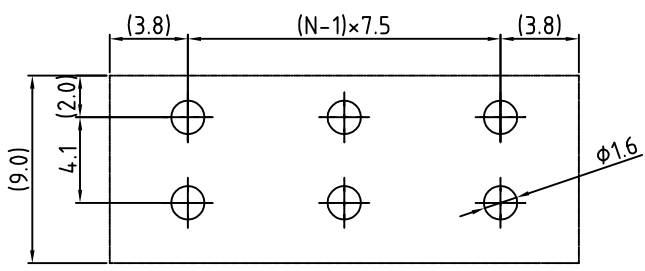

PART NUMBER:

OSTVAXX2160

↓	↓	↓
No. of Poles		COLOR
02 2 Poles		0: Black
03 3 Poles		5: Green
...		6: Blue (Standard)
12 12 Poles		8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTVA -7.5mm Series		DWG NO.		OSTVAXX2160.DWG	
PART NO.		OSTVAXX2160		DWG NO.		OSTVAXX2160.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
Shi Jun 2006.10.19	Shi Jun 2006.10.19	xionghaitao 2006.10.19	xionghaitao 2006.10.19		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
					REV: D	X.XX	±0.10
						X°	±1°

单击下面可查看定价，库存，交付和生命周期等信息

[>>VIVA\(昱盛電子\)](#)