

APPROVAL SHEET

WR02X(W)_J

±5%, ±1%

Thick Film General purpose chip resistors
Automotive AEC Q-200 compliant
Size 0201

*Contents in this sheet are subject to change without prior notice.

FEATURE

1. Automotive grade AEC Q-200 compliant with 100% CCD visual inspection
2. High reliability and stability
3. Reduced size of final equipment
4. Suitable for high density print circuit board assembly
5. Higher component and equipment reliability
6. Lead free product

APPLICATION

- Automotive
- Mobile phone
- PDA
- Camcorders
- Palmtop computers
- Hybrid module

DESCRIPTION

The resistors are constructed in a high grade ceramic body (aluminum oxide). Internal metal electrodes are added at each end and connected by a resistive paste that is applied to the top surface of the substrate. The composition of the paste is adjusted to give the approximate resistance required and the value is trimmed to nominated value within tolerance which controlled by laser trimming of this resistive layer.

The resistive layer is covered with a protective coat. Finally, the two external end terminations are added. For ease of soldering the outer layer of these end terminations is a pure Tin.

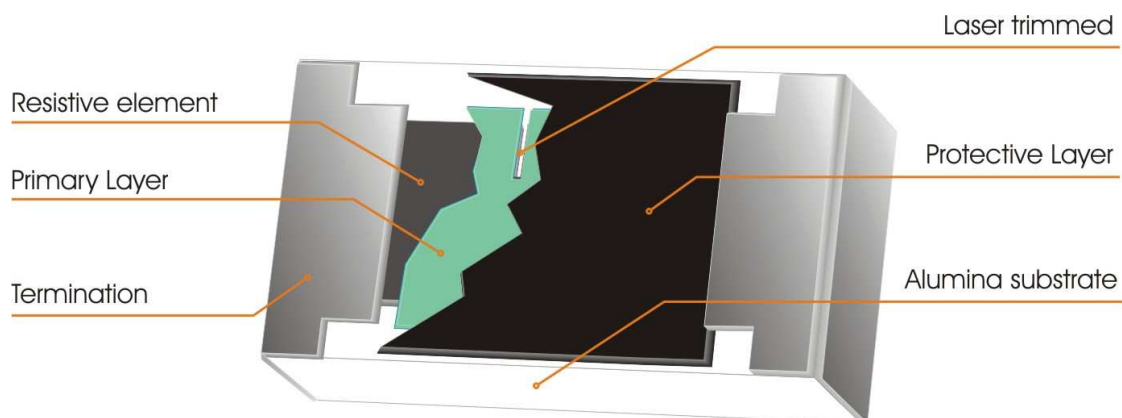


Fig 1. Construction of Chip-R WR02X

QUICK REFERENCE DATA

| Item | General Specification | |
|---|---|------------|
| Series No. | WR02X(W)_J | |
| Size code | 0201(0603) | |
| Resistance Range | 1Ω~10MΩ (±5% tolerance), Jumper 1Ω~ 10MΩ (±1% tolerance) | |
| Resistance Tolerance | ±1% E96/E24 | ±5% E24 |
| TCR (ppm/°C) | 10Ω - 10MΩ, ≤±200ppm 4.02 - 9.76Ω, +350 ~ -100ppm 1 - 3.92Ω, +600 ~ -200ppm | |
| Max. dissipation @ T _{amb} =70°C | 1/20 W | |
| Max. Operation Voltage | 25V | |
| Max. Overload Voltage | 50V | |
| Operation temperature | -55 ~ +125°C | |


Note :

- This is the maximum voltage that may be continuously supplied to the resistor element, see "IEC publication 60115-8"
- Max. Operation Voltage : So called RCWV (Rated Continuous Working Voltage) is determined by

$$RCWV = \sqrt{\text{Rated Power} \times \text{Resistance Value}} \text{ or Max. RCWV listed above, whichever is lower.}$$

DIMENSION(unit : mm)

| | WR02X(W) |
|-----------|-------------|
| L | 0.60 ± 0.03 |
| W | 0.30 ± 0.03 |
| T | 0.23 ± 0.03 |
| Tb | 0.15 ± 0.05 |
| Tt | 0.10 ± 0.05 |

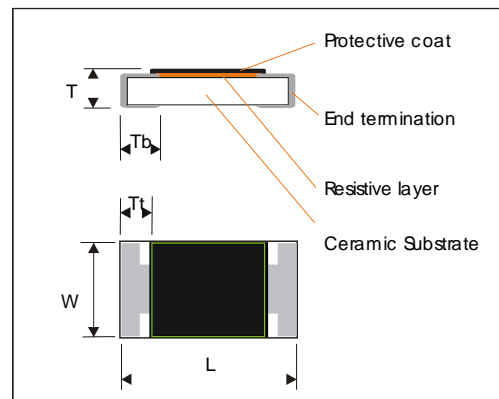**MARKING**

WR02X(W) has no marking.

FUNCTIONAL DESCRIPTION

Product characterization

Standard values of nominal resistance are taken from the E24/E96 series for resistors with a tolerance of $\pm 5\%$ & $\pm 1\%$. The values of the E24/E96 series are in accordance with "IEC publication 60063"

Derating

The power that the resistor can dissipate depends on the operating temperature; see Fig.2

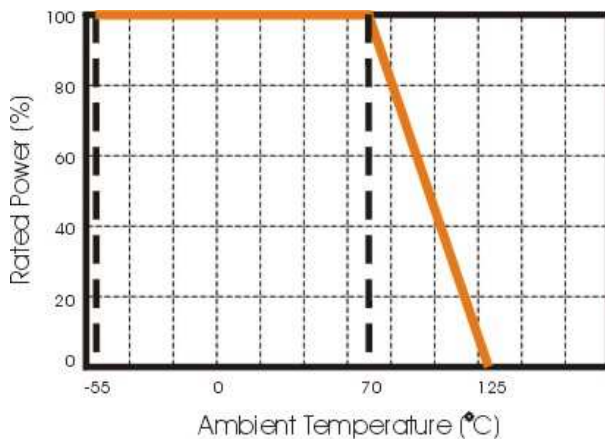


Figure 2. Maximum dissipation in percentage of rated power
As a function of the ambient temperature

MOUNTING

Due to their rectangular shapes and small tolerances, Surface Mountable Resistors are suitable for handling by automatic placement systems.

Chip placement can be on ceramic substrates and printed-circuit boards (PCBs).

Electrical connection to the circuit is by individual soldering condition.

The end terminations guarantee a reliable contact.

SOLDERING CONDITION

The robust construction of chip resistors allows them to be completely immersed in a solder bath of 260°C for 10 seconds. Therefore, it is possible to mount Surface Mount Resistors on one side of a PCB and other discrete components on the reverse (mixed PCBs).

Surface Mount Resistors are tested for solderability at 235°C during 2 seconds. The test condition for no leaching is 260°C for 30 seconds. Typical examples of soldering processes that provide reliable joints without any damage are given in Fig 3.

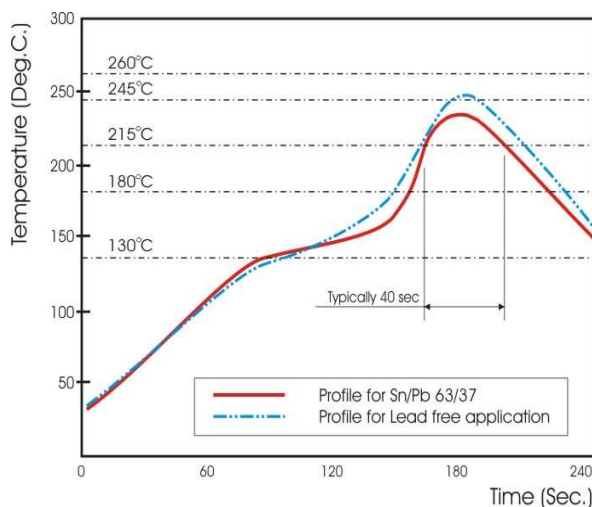


Fig 3. Infrared soldering profile for Chip Resistors WR02X(W)

CATALOGUE NUMBERS

The resistors have a catalogue number starting with :

| WR02 | X | 472_ | J | A | L | J |
|---------------------------------|---|--|--|--|---|---|
| Size code WR02 : 0201 | Type code X : Normal W : 1% For <10Ω / >1MΩ | Resistance code 5%, E24: 2 significant digits followed by no. of zeros 100Ω = 101_ 10KΩ = 103 1%, E24+E96: 3 significant digits followed by no. of zeros 100Ω =1000 37.4KΩ =3742 | Tolerance J : ±5% F : ±1% P : Jumper | Packaging code A : 7" Reeled (15Kpcs/Reel) T : 7" Reeled (10Kpcs/Reel) D : 7" Reeled (20Kpcs/Reel) G : 13" Reeled (70Kpcs/Reel) | Termination code L = Sn base (lead free) | Special code J = Automotive grade & 100% CCD visual inspection |

TEST AND REQUIREMENTS (AEC Q-200 REV.D 2010)

| TEST | PROCEDURE / TEST METHOD | REQUIREMENT | |
|--|--|---|--------|
| | | Resistor | 0Ω |
| Electrical Characteristics JISC5201-1: 1998 Clause 4.8 | - DC resistance values measurement - Temperature Coefficient of Resistance (T.C.R) Natural resistance change per change in degree centigrade. $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (ppm/}^\circ\text{C)}$ $t_1 : 20^\circ\text{C}+5^\circ\text{C}-1^\circ\text{C}$ R_1 : Resistance at reference temperature (20°C+5°C/-1°C) R_2 : Resistance at test temperature (-55°C or +125°C) | Within the specified tolerance Refer to "QUICK REFERENCE DATA" | <50mΩ |
| Resistance to soldering heat(R.S.H) AEC Q200-15 | Un-mounted chips completely immersed for 10±1second in a SAC solder bath at 260°C±5°C | ΔR/R max. ±(1%+0.05Ω) no visible damage | <50mΩ |
| Solderability AEC Q200-18 | a. 4hrs @ 155°C, 235°C, 5 secs b. 8hrs steam, 235°C, 5secs | 95% coverage min., good tinning and no visible damage | |
| Temperature cycling AEC Q200-4 | 30 minutes at -55°C±3°C, 2~3 minutes at 20°C+5°C-1°C, 30 minutes at +125°C±3°C, 2~3 minutes at 20°C+5°C-1°C, total 1000 continuous cycles | ΔR/R max. ±(1%+0.05Ω) | < 50mΩ |
| Bias Humidity AEC Q200-7 | 1000 +48/-0 hours, in humidity chamber controller at +85°C/85%RH, 10% rated power | ΔR/R max. ±(5%+0.10Ω) | < 50mΩ |
| Operational Life MIL-STD-202 method 108 | 1000+48/-0 hours; 35% of operation power, 125±2°C | ΔR/R max. ±(5%+0.10Ω) | < 50mΩ |
| High Temperature Exposure AEC Q200-3 | 1000 hrs @ 125°C, un-powered | ΔR/R max. ±(5%+0.10Ω) | < 50mΩ |
| Bending strength AEC Q200 -21 | Resistors mounted on a 90mm glass epoxy resin PCB(FR4), bending once 2mm for 60sec. | No visual damaged, ΔR/R max. ±(1%+0.05Ω) | < 50mΩ |
| Terminal strength AEC Q200-22 | Pressurizing force: 3N, Test time: 10±1sec. | No remarkable damage or removal of the terminations | |
| Vibration AEC Q200-14 | 5 g's for 20 min, 12 cycles each of 3 orientations | ΔR/R max ≤ ±(1%+0.05Ω) and no visible damage | < 50mΩ |
| Mechanical Shock AEC Q200-13 | Shock machine, half sine, 100G, 6msec, XX'YY'ZZ', 10times each | ΔR/R max ≤ ±(1%+0.05Ω) and no visible damage | < 50mΩ |
| ESD (HBM) AEC Q200-002 | Human body model, 1.5 Kohm, 100 pF, 0.4KV | ΔR/R max. ±(5%+0.10Ω) | < 50mΩ |

PACKAGING

Paper Tape specifications (unit :mm)



| Series No. | A | B | W | F | E |
|------------|-----------|-----------|-----------|-----------|-----------|
| WR02X | 0.67±0.05 | 0.37±0.05 | 8.00±0.20 | 3.50±0.05 | 1.75±0.10 |

| Series No. | P1 | P0 | ΦD | T |
|------------|-----------|-----------|---------------------------------------|-----------|
| WR02X | 2.00±0.05 | 4.00±0.05 | Φ1.50 ^{+0.1} _{-0.0} | 0.45±0.05 |

Reel dimensions



| Symbol | A | B | C | D |
|----------|------------|------------|----------|---------|
| 7" Reel | Φ178.0±0.2 | Φ60.0±1.0 | 13.0±0.2 | 9.0±0.5 |
| 13" Reel | Φ330.0±2.0 | Φ100.0±1.0 | 13.0±0.2 | 9.0±0.5 |

Taping quantity and Tape material

- Chip resistors 10,000 / 15,000 / 20,000 pcs 7" Reel, Paper tape.
- Chip resistors 70,000 pcs 13" Reel, Paper tape.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Walsin Technology\(华新科技\)](#)