

# APPROVAL SHEET

**RF SAW Duplexer Series – RoHS Compliance**

**LTE Band 5 system**

**For Rx Balanced Type**

**824~849 / 869~894 MHz Band Working Frequency**

**P/N : DB18140836B510T**

## Approval Sheet


### Features

- Low loss, Low pass band ripple
- Single ended to balanced transformation
- Impedance transformation 50 Ohm to 100 Ohm
- Package for **S**urface **M**ount **T**echnology (SMT)
- **E**lectrostatic **S**ensitive **D**evice (ESD)
- Small package : (1.8mm x 1.4mm x 0.65mm)
- RoHS Compliance
- **M**oisture **S**ensitive **L**evel 3 (MSL3)

### Application

- LTE Band 5 system

### Package Dimensions

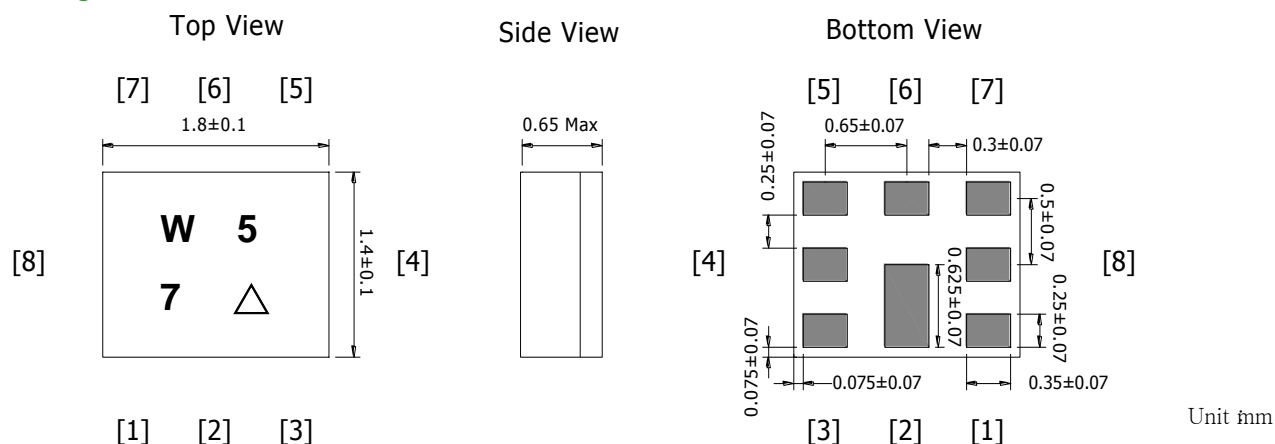


#### Pin Descriptions

Pin	Description	Pin	Description
[1]	Rx	[5]	GND
[2]	GND	[6]	Ant
[3]	Tx	[7]	GND
[4]	GND	[8]	RX

#### Marking Descriptions

Marking	Description
W	WTC
5	Band Class
7	Series Number
△	Date Code( Year + Month )

### Test Circuit

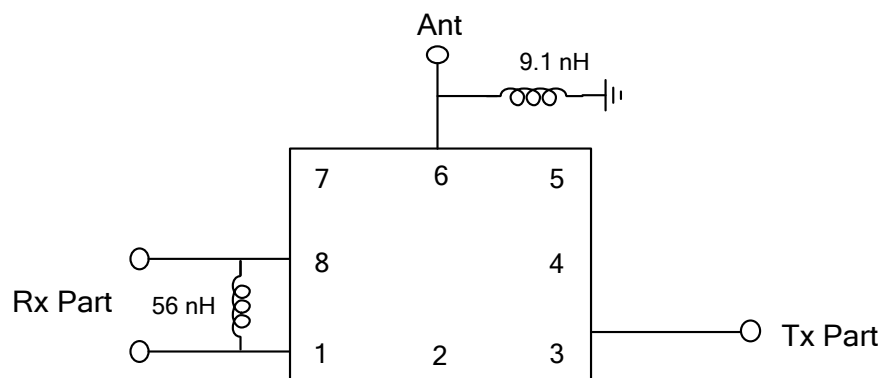

**Approval Sheet**
**Electrical Specifications (Tx to ANT & ANT to RX)**

Item		Condition (MHz)	Specification			Unit	
			Min.	Typ.	Max.		
Tx to ANT	Insertion loss		824 ~ 849	-	1.7	2	dB
	Pass Band Ripple		824 ~ 849	-	0.8	1.2	dB <sub>p-p</sub>
	VSWR	ANT	824 ~ 849	-	1.6	2	-
		Tx		-	1.6	2	-
	Absolute attenuation		779 ~ 804	35	41	-	dB
			869 ~ 894	44	48	-	dB
			1565.42 ~ 1605.89	40	46	-	dB
			1648 ~ 1698	38	44	-	dB
			1710 ~ 1785	35	42	-	dB
			1805 ~ 1880	33	40	-	dB
			1920 ~ 1980	30	38	-	dB
2110 ~ 2170			30	36	-	dB	
2400 ~ 2557			25	32	-	dB	
4900 ~ 5950	25	37	-	dB			
ANT to RX	Insertion loss		869 ~ 894	-	1.9	2.3	dB
	Pass Band Ripple		869 ~ 894	-	0.6	1.2	dB <sub>p-p</sub>
	VSWR	ANT	869 ~ 894	-	1.7	2	-
		Rx		-	1.7	2	-
	Phase Balance		869 ~ 894	-10	+1.0/+3.4	+ 10	deg
	Amplitude Balance		869 ~ 894	- 1	-0.1/+0.2	+ 1	dB
	Absolute attenuation		824 ~ 849	50	55	-	dB
			1710 ~ 1788	45	52	-	dB
			1850 ~ 1920	45	51	-	dB
			1920 ~ 1980	45	51	-	dB
			2400 ~ 2500	44	48	-	dB
3476 ~ 3576			40	47	-	dB	
4900 ~ 5950	30	40	-	dB			

## Approval Sheet

### Electrical Specifications ( TX to RX )

Item		Condition (MHz)	Specification			Unit
			Min.	Typ.	Max.	
TX to RX	Isolation	824 ~ 849	55	59	-	dB
		869 ~ 894	50	53	-	dB
Terminating Impedance		Tx port	50			Ohm
		Rx port	100			Ohm
		Ant port	50			Ohm

Note : With matching network (Ref. testing environment circuit as shown above).


### Absolute Maximum Ratings

Item	Rating	Unit
DC permissive voltage	0	V
Maximum input power	29	dBm
Operating temperature range	-20 ~ +85	°C
Storage temperature range	-40 ~ +85	°C


**Approval Sheet**

**Typical Frequency Response**


■ Tx to Ant

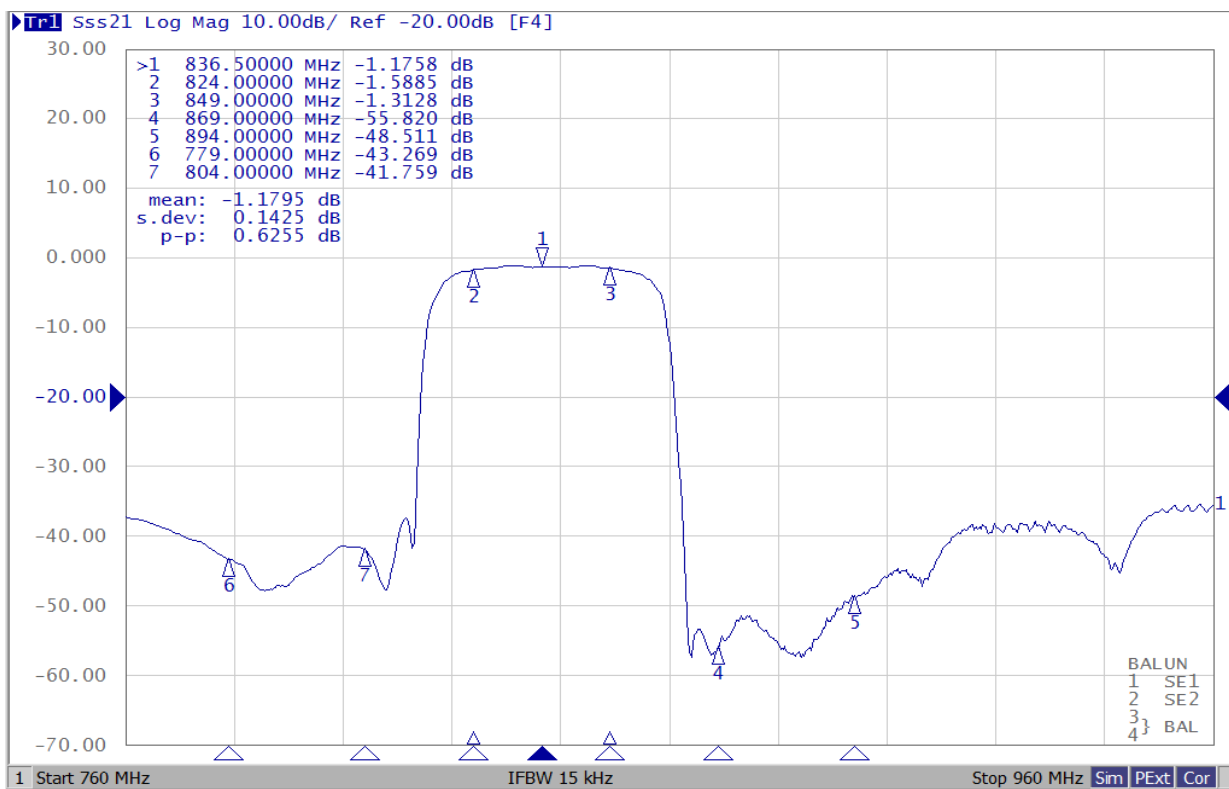


■ Ant to Rx

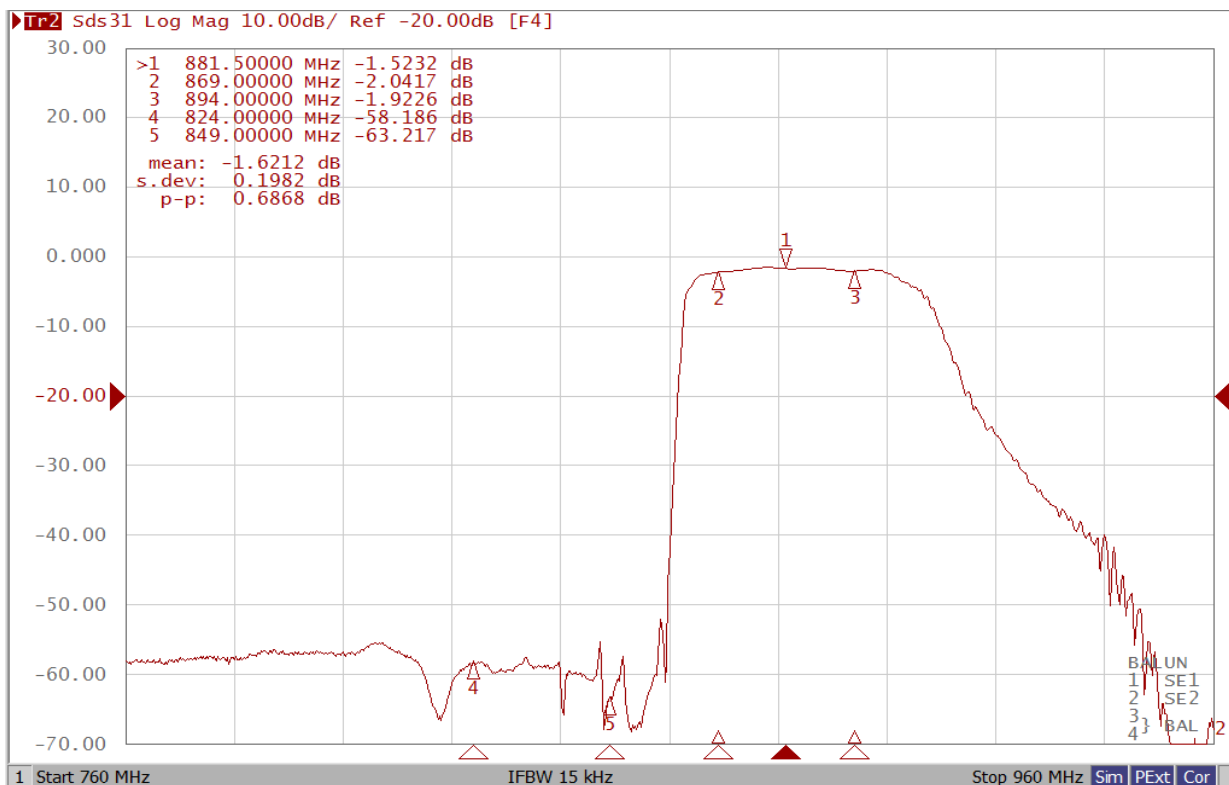



■ **Ripple**

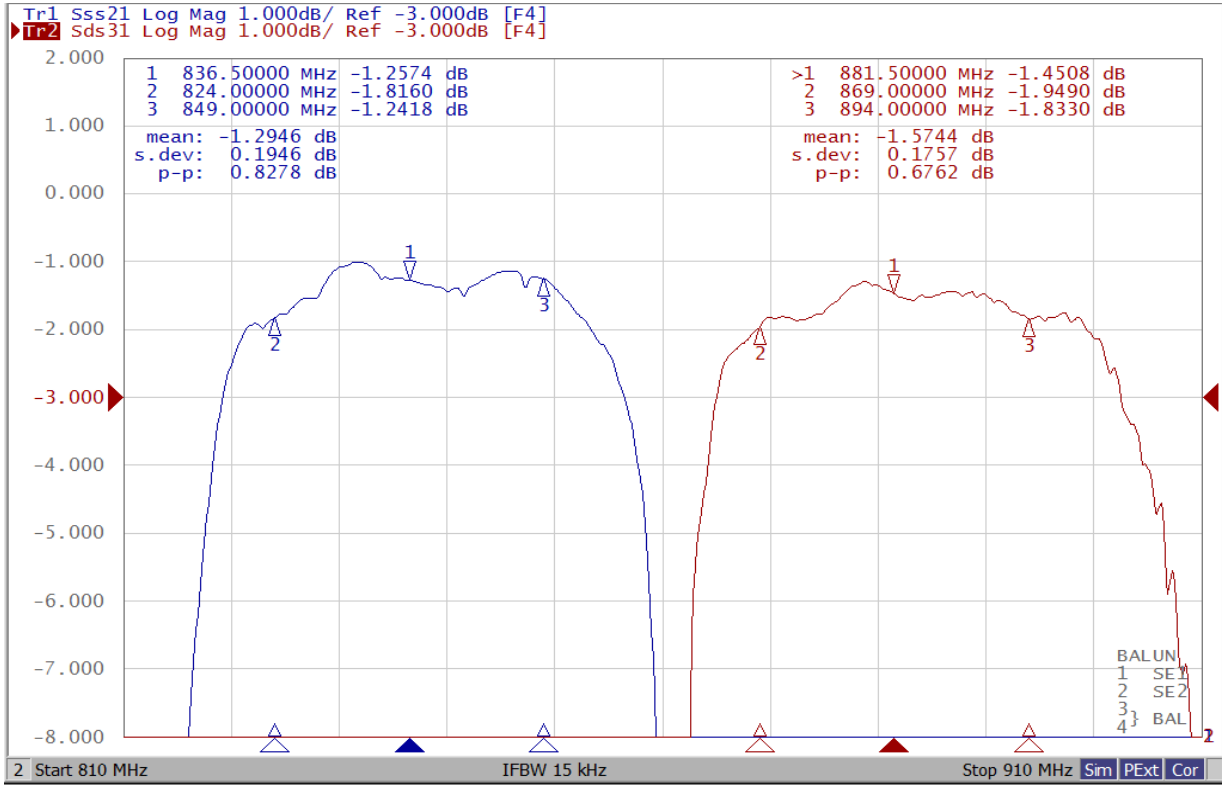



■ **Isolation**

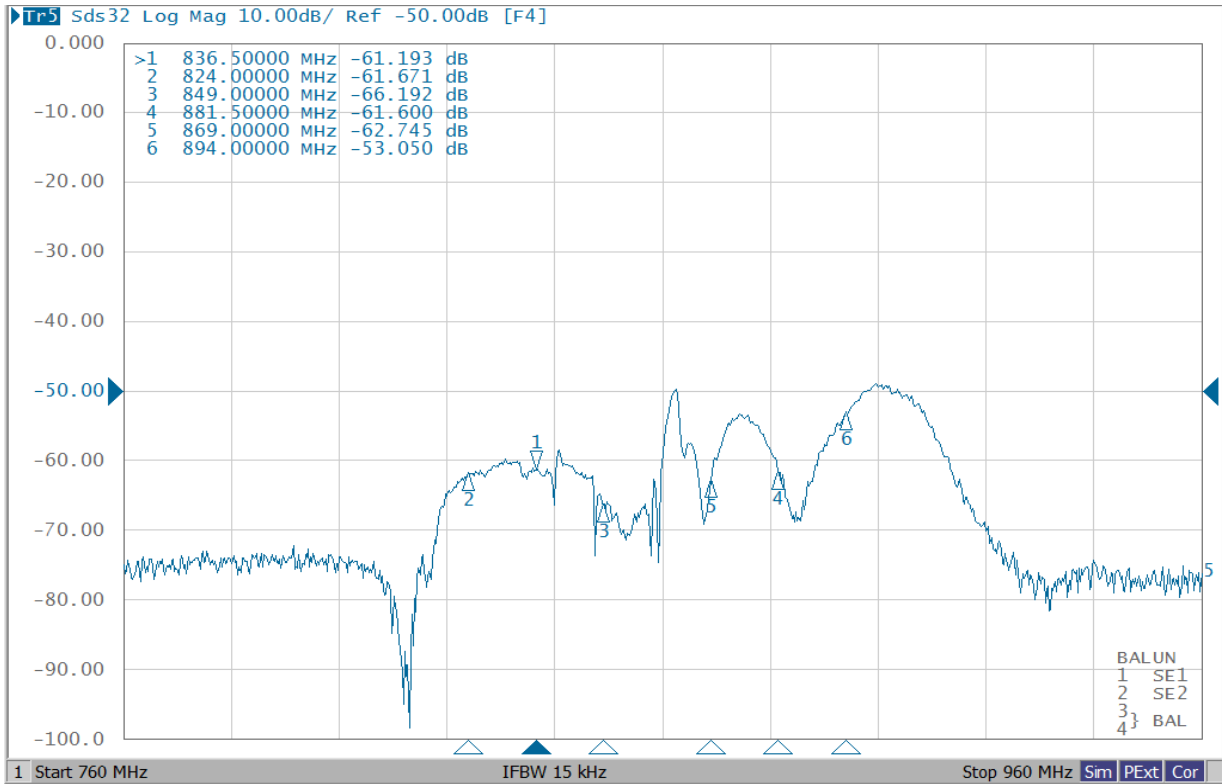



■ VSWR & Smith chart (Tx Port)

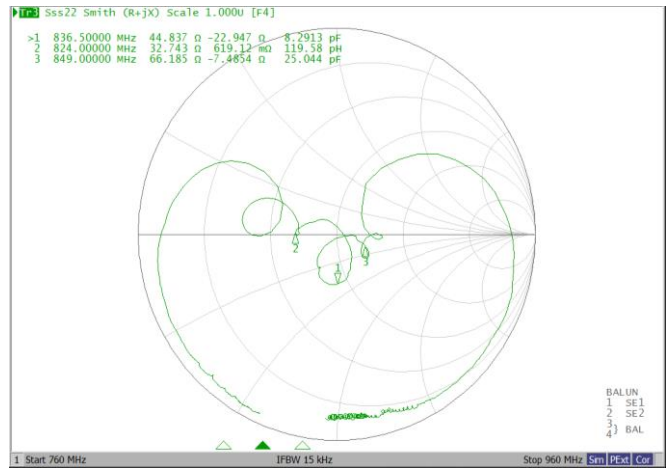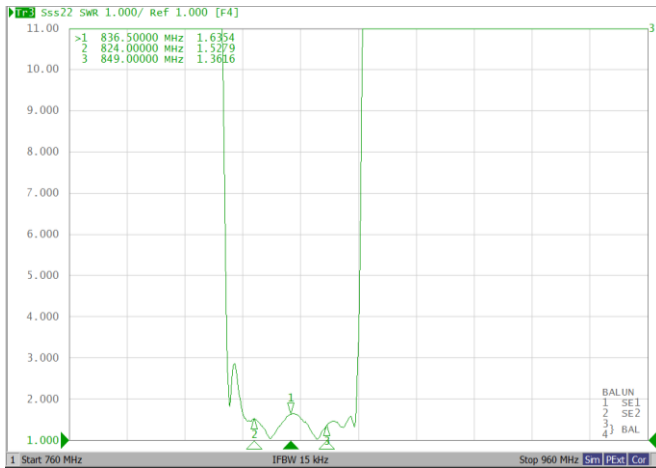


■ VSWR & Smith chart (Rx Port)

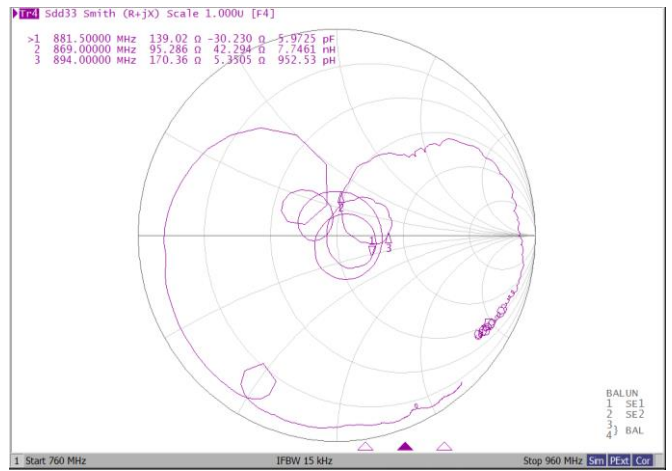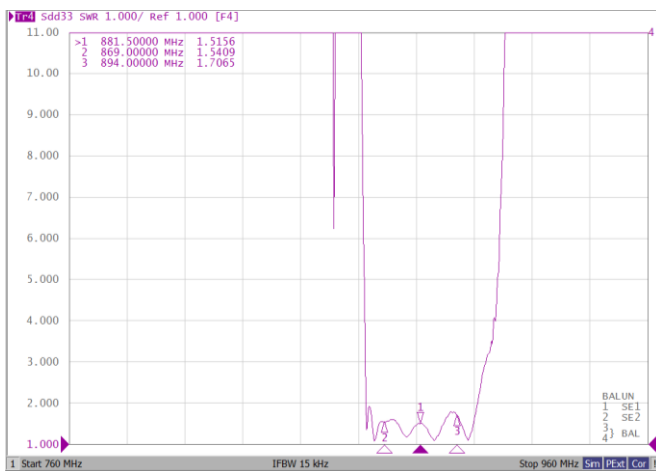


■ VSWR & Smith chart (ANT Port)

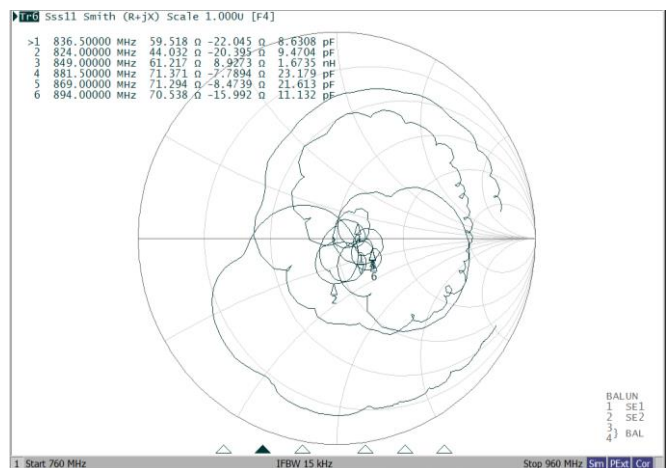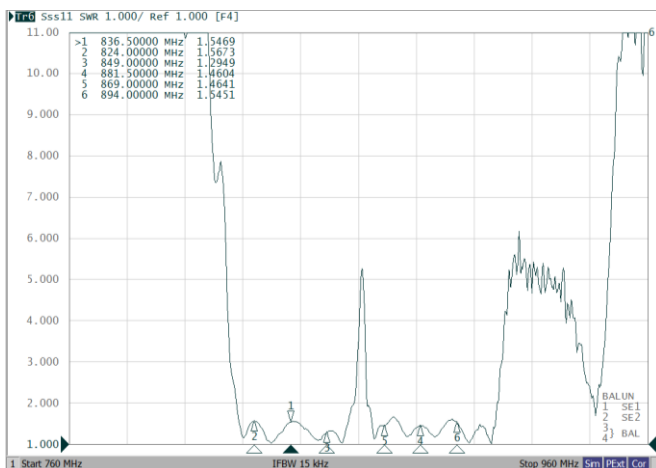

■ Phase Balance



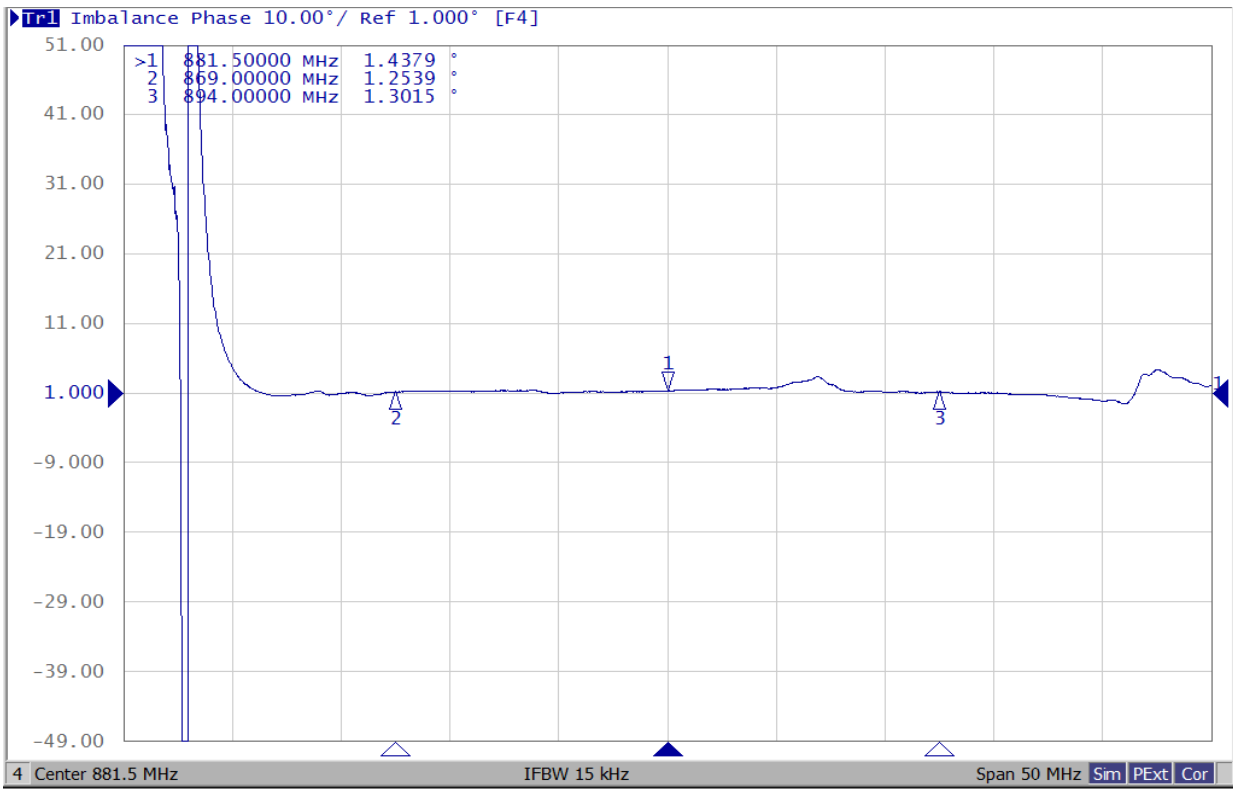


■ Amplitude Balance

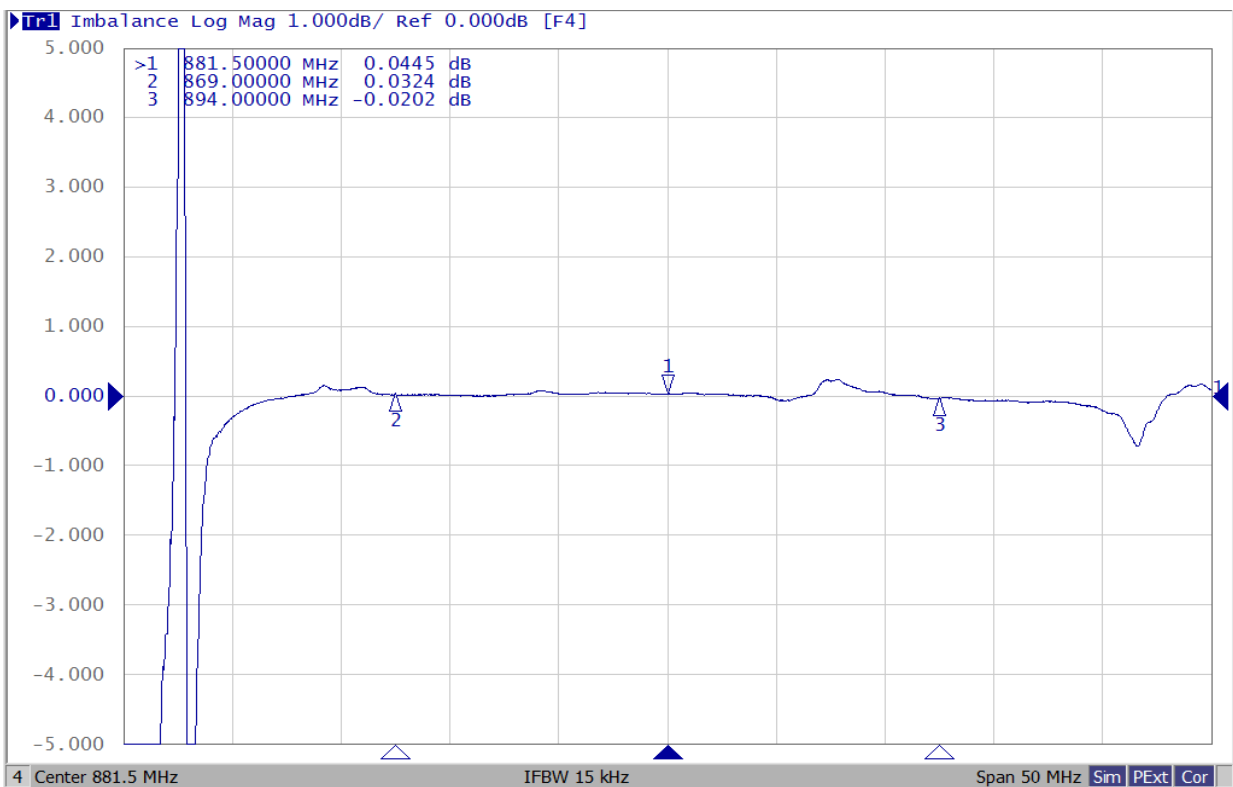




■ Wide Span

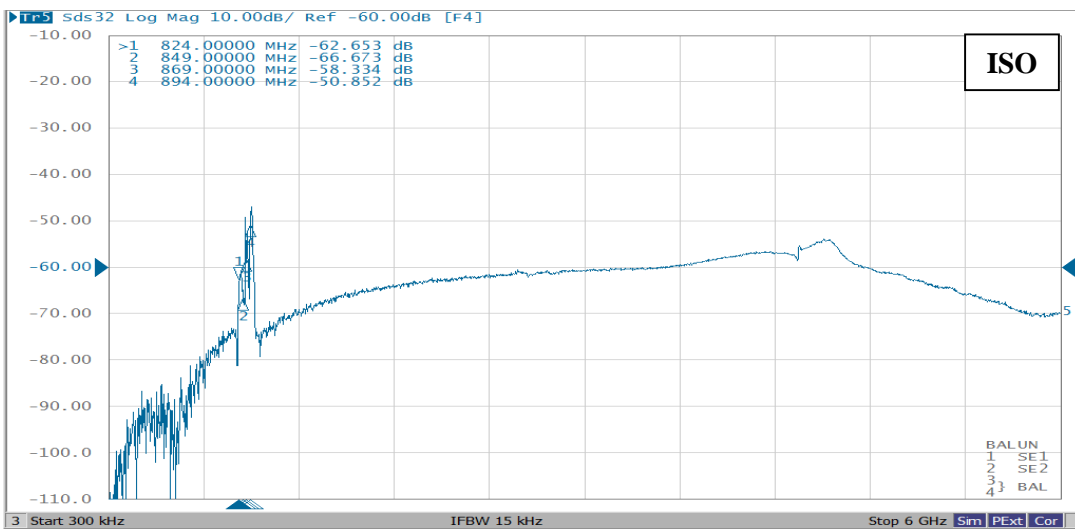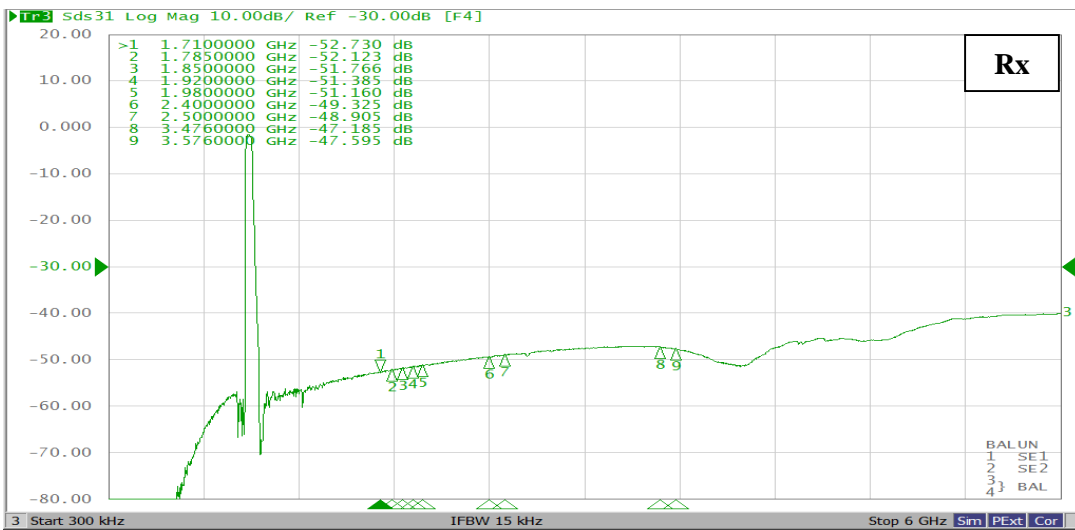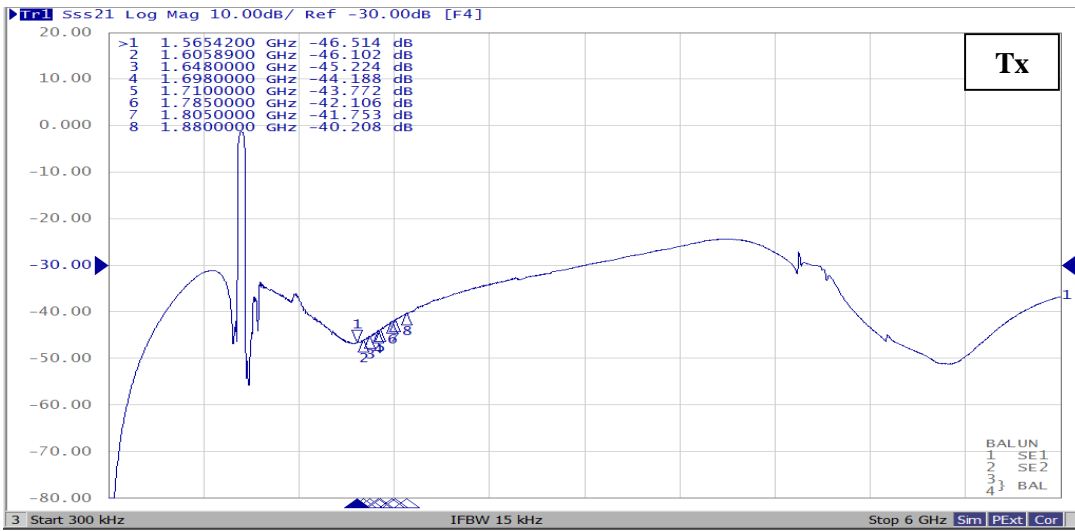

**Approval Sheet**

**Solder Land Pattern**

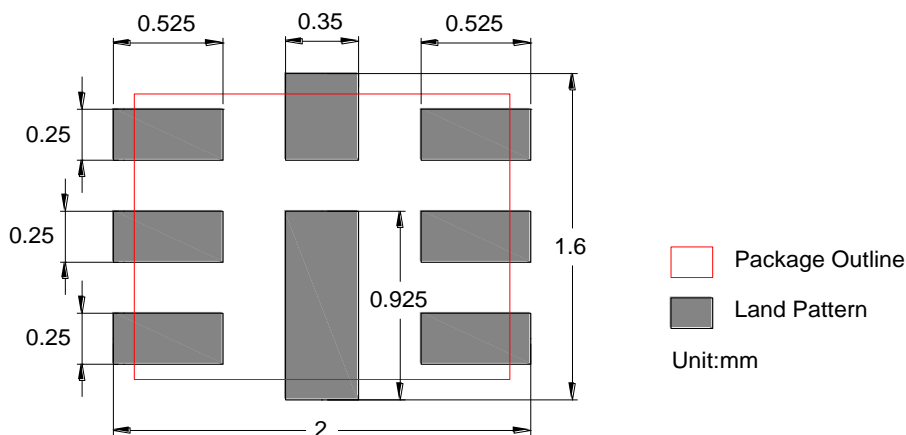


**Reliability Test**

Test	Procedure/Test method	Requirements
<b>Vibration</b>	*Frequency : 10Hz ~ 55Hz *Total amplitude : 1.5mm *Sweep period : 1.0 minute *Vibration directions : 3 mutually perpendicular *Duration : 2 hours / direct	After the test, specimen would be kept at room temperature for 2 hours.  And then the measured values shall fulfill the Electrical Specifications.
<b>Drop test</b>	*Height : 1.0 m *Test surface : Rigid surface of concrete or steel *Times : 10 times	
<b>Static humidity</b>	*Temperature : +70°C± 2°C *Relative humidity : 90% *Duration : 96 hours	
<b>Temperature cycling</b>	1. 30 minutes at -40°C, 2. 30 minutes at +85°C, *cycle time : 100 times	
<b>High temperature exposure</b>	*Exposure temperature : 85°C± 5°C *Exposure duration : 240 hours	
<b>Low temperature exposure</b>	*Exposure temperature : -40°C± 5°C *Exposure duration : 240 hours	
<b>Reflow soldering</b>	*Temperature / Duration : 275°C / 10sec *Total time : 6 minute (IR-reflow)	

**Approval Sheet**  
**Soldering Condition**


**260°C Suggested Solder Reflow**

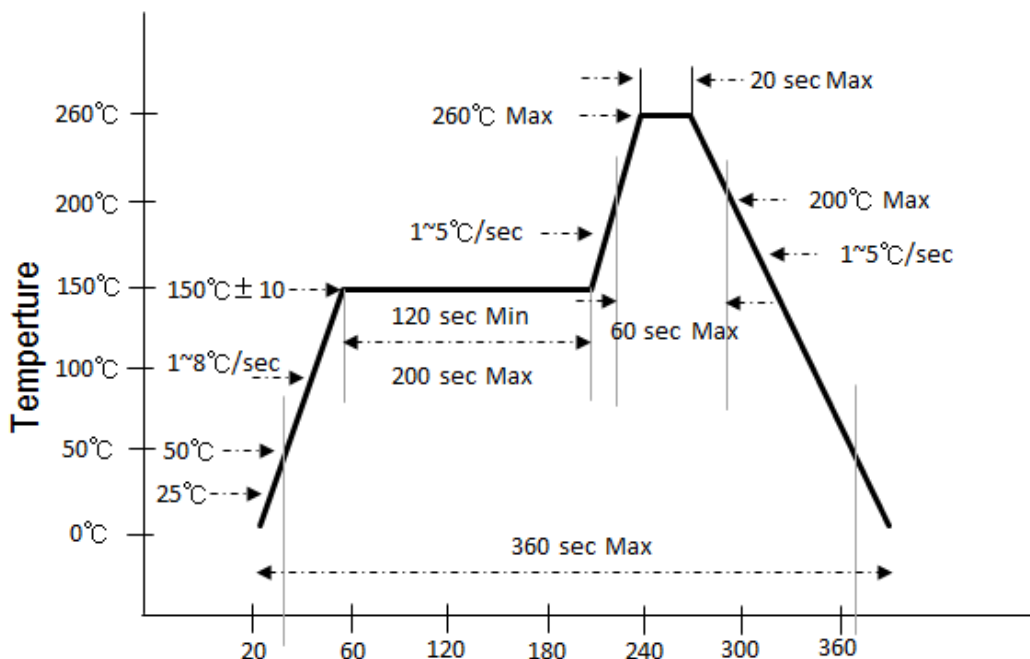

**Ordering Code**

<b>DB</b>	<b>1814</b>	<b>0836</b>	<b>B5</b>	<b>10</b>	<b>T</b>
<b>Series</b>	<b>Dimension code</b>	<b>Frequency</b>	<b>Application</b>	<b>Serial Number</b>	<b>Packing</b>
DB : Balanced SAW Duplexer	Per 2 digits of Length, Width 1814= Length 1.8mm Width 1.4mm	836 : Center Freq (836MHz)	B5 : LTE Band 5	Design Code	T : Reeled

**Packing**

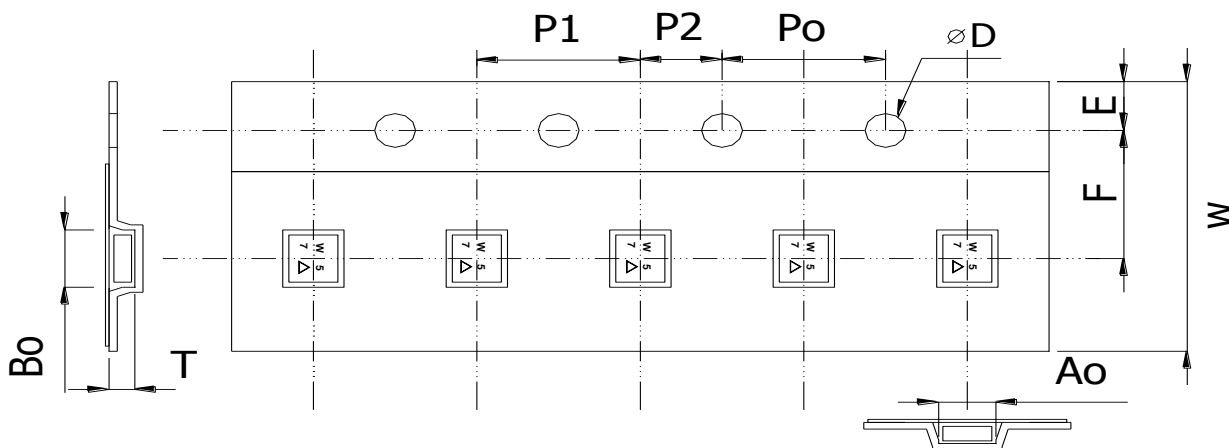


Plastic Tape specifications

Index	Ao	Bo	φD	T	W
Dimension (mm)	1.8 ± 0.10	2.2 ± 0.10	1.55 ± 0.05	0.65 ± 0.10	8.0 ± 0.20
Index	E	F	Po	P1	P2
Dimension (mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.0 ± 0.10

## Approval Sheet

### Reel Dimensions

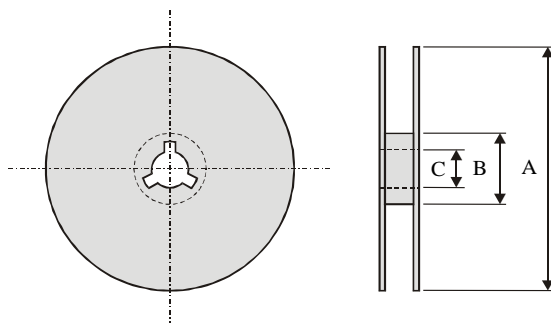

Index	A	B	C
Dimension (mm)	$\Phi 180.0 +0/-1.5$	$\Phi 60.5 \pm 0.5$	$\Phi 15.0 \pm 0.2$

Note : The product shall be packed properly not to be damaged during transportation and storage.  
Taping Quantity : 3000 pieces per 7"reel

### Caution Of Handling

#### Limitation of Applications

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects, which might directly cause damage to the third party's life, body or property.

- (1) Aircraft equipment
- (2) Aerospace equipment
- (3) Undersea equipment
- (4) Medical equipment
- (5) Disaster prevention / crime prevention equipment
- (6) Traffic signal equipment
- (7) Transportation equipment (vehicles, trains, ships, etc.)
- (8) Applications of similar complexity and /or reliability requirements to the applications listed in the above.

### Storage Condition

- (1) Products should be used in 6 months from the day of WALSIN outgoing inspection, which can be confirmed.
- (2) Storage environment condition.
  - Products should be storage in the warehouse on the following conditions.
  - Temperature : -10 to +40°C
  - Humidity : 30 to 70% relative humidity
  - Don't keep products in corrosive gases such as sulfur. Chlorine gas or acid or it may cause oxidization of electrode, resulting in poor solderability.
  - Products should be storage on the palette for the prevention of the influence from humidity, dust and son on.
  - Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.
  - Products should be storage under the airtight packaged condition.

### Important Notes

- (1) This device should not be used in any type of fluid such as water, oil, organic solvent, etc.
- (2) Cleaning agent isopropyl alcohol and ethyl alcohol can be used.
- (3) As rapid temperature change for cleaning after reflow soldering might be a cause of degradation or destruction, clean this component after confirming that temperature of this component goes down to room temperature.
- (4) As ultrasonic vibration might be a cause of degradation or destruction, do not use ultrasonic cleaning.
- (5) This device follows JEDEC standards for moisture classifications.  
The following this device is classified as **Moisture Sensitive Level 3**  
This device is moisture sensitive and need to be handled within proper MSL 3 guidelines to avoid damage from moisture absorption and exposure to solder reflow temperatures that can result in yield and reliability degradation
- (6) This is an **Electrostatic Sensitive Device**.  
Please avoid static voltage during operation and storage.
- (7) Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.
- (8) If any malfunction due to designing or manufacturing which is out of specification occurs within one year after the products have been delivered, the maker should exchange the defective products.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Walsin Technology\(华新科技\(华科\)\)](#)

[>>点击查看相关商品](#)