

APPROVAL SHEET

RF Switch Series – RoSH Compliance

SP3T GPIO Switch

Halogens Free Product

Any 2G/3G/4G Antenna Diversity For Receive System

P/N: RFASWMT2628BTF09

*Contents in this sheet are subject to change without prior notice.

Approval Sheet

FEATURES

- Low Insertion Loss : 0.7dB typ. @ 2.7GHz
- P_{0.1dB} compression point : 30dBm typ. @ 2.7GHz
- Low control voltage : 0 to 0.4V
- Miniature footprint : 1.1 x 1.1 x 0.55 mm³
- High ESD tolerance of 2kV HBM at all pins
- Moisture Sensitive Level 3 (MSL3)


Description

- The RFASWMT2628BTF09 is a CMOS SOI (Silicon On Insulator) Single Pole, Triple Throw (SP3T) switch that operating at 0.8-2.7 GHz. The RFASWMT2628ATF09 is manufactured in a QFN (1.1x1.1x0.55mm³) package.
- The RFASWMT2628BTF09 features very high isolation with very low DC power consumption.
- The RFASWMT2628BTF09 has ESD protection devices to achieve excellent ESD performances. No DC Blocking capacitors are required for all RF ports unless DC is biased externally

Application

- Multi-mode 2G/3G, LTE application receive system.

Block Diagram and Pin Out (Top View)

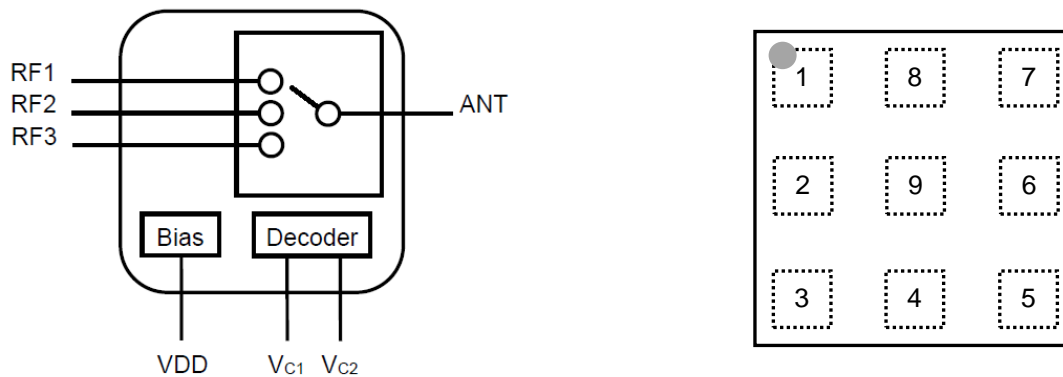


Pin Names and Descriptions

Pin	Name	Description	Pin	Name	Description
1	V _{c1}	DC control voltage 1	6	GND	Ground
2	RF3	RF path 3	7	VDD	DC power supply
3	RF1	RF path 1	8	V _{c2}	DC control voltage 2
4	ANT	Antenna port	9	GND	Ground
5	RF2	RF path 2			

Approval Sheet

Application Circuit

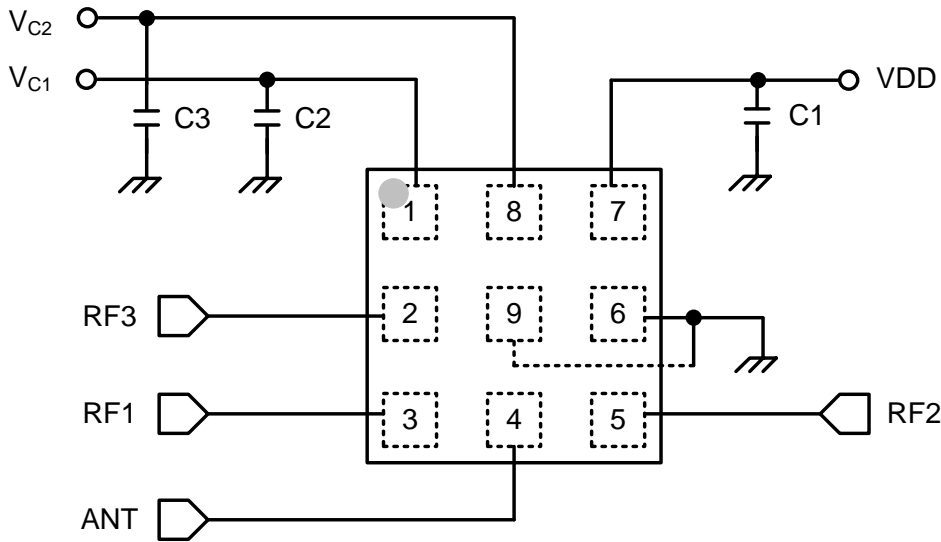

Note: No DC Blocking capacitors are required for all RF ports unless DC is biased externally.

Parts List

Parts No.	Value
C1-C3	100 pF

Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
RFx Input Power	Pin		+30	dBm
DC Supply Voltage	VDD	+2.5	+5.0	V
DC Control Voltage	VCTL	+1.2	+3.3	V
Storage temperature	T _{STG}	-40	+125	°C
Operating temperature	T _{OP}	-40	+85	°C

Exceeding absolute maximum ratings may cause permanent damage. Operation between operating range maximum and absolute maximum for extended periods may reduce reliability.

Approval Sheet

Electrical Specifications

(Top= 25°C, VDD=2.85V, V_{CTL}=0/1.8V, Characteristic Impedance Z₀= 50 Ω, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
RF Specifications						
Operating frequency	f		0.8		2.7	GHz
Insertion loss (ANT to RF1/2/3 port)	IL	0.8 ~ 1.0 GHz		0.30	0.50	dB
		1.0 ~ 2.2 GHz		0.50	0.70	dB
		2.2 ~ 2.7 GHz		0.70	0.90	dB
Isolation (ANT to RF1/2/3 port)	Iso	0.8 ~ 1.0 GHz	26	34		dB
		1.0 ~ 2.2 GHz	16	22		dB
		2.2 ~ 2.7 GHz	14	17		dB
On state match	VSWR	0.8 ~ 2.7 GHz		1.5	2.0	
Input Power 0.1dB Compression Point	P _{0.1dB}	0.8 ~ 2.7 GHz		+30		dBm
RFx Harmonics	2f ₀	PIN = +26dBm, f = 0.8 ~ 2.7GHz		+90		dBc
	3f ₀	PIN = +26dBm, f = 0.8 ~ 2.7GHz		+90		dBc
DC Specification (Decoder)						
Supply Voltage	VDD		2.5	2.85	5.0	V
Supply Current	I _{DD}	VDD= 2.85V		55		μA
Control Voltage(High)	V _{CTL}		1.2	1.8	3.3	V
Control Voltage(Low)	V _{CTL}		0		0.4	V
Control Current	I _{CTL}	V _{CTL} = 1.8V		1.0		μA
Switching Specification						
Switching speed	T _{SW}	50% V _{CTL} to 90/10% RF		1.5		μs


Note : All measurements made in a 50Ω system with 0/+1.8V control voltages, unless otherwise specified.

Logic Table for Switch On-Path (High=1.8V ,Low= 0V)


V _{c1}	V _{c2}	RF1	RF2	RF3
1	0	on	off	off
0	1	off	on	off
1	1	off	off	on

Approval Sheet

Dimensions

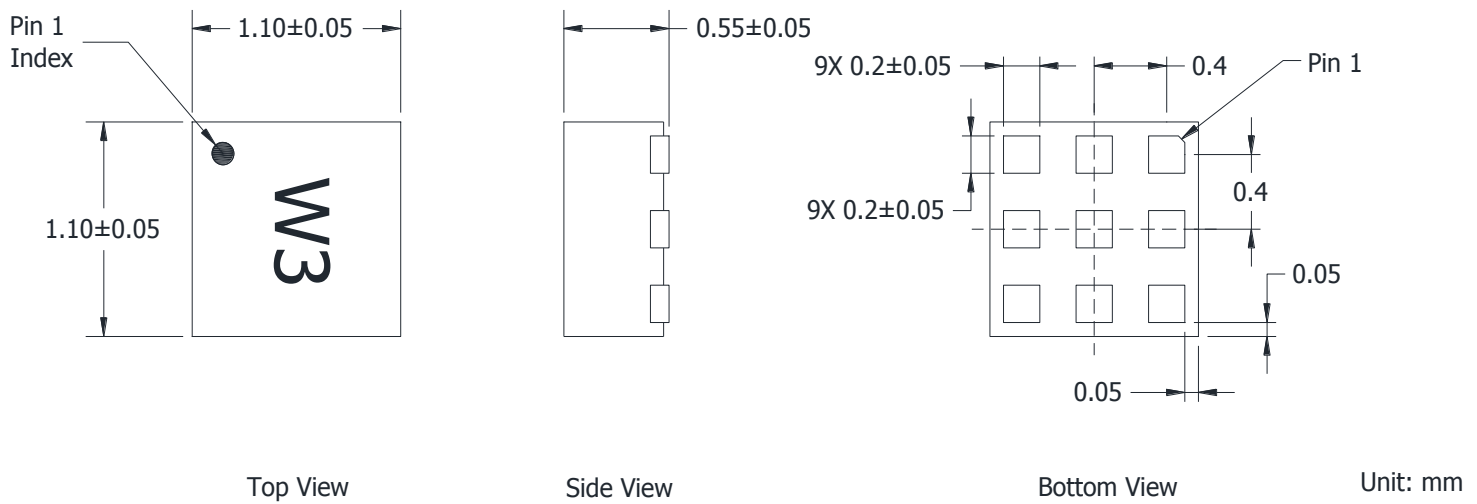

Solder Land Pattern

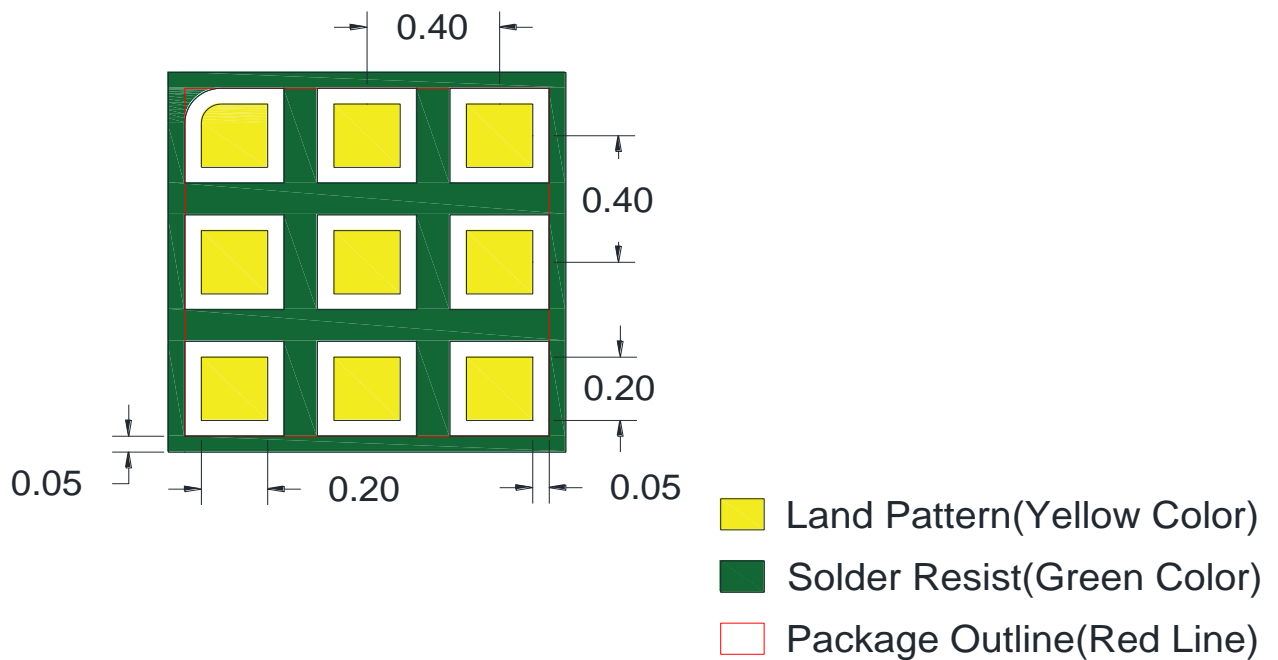


Approval Sheet

Reliability test

TEST	PROCEDURE / TEST METHOD	REQUIREMENT
Solderability JIS C 0050-4.6 JESD22-B102D	*Solder bath temperature : 255 ± 5°C *Immersion time : 5 ± 0.5 sec Solder : Sn3Ag0.5Cu for lead-free	At least 95% of a surface of each terminal electrode must be covered by fresh solder.
High temperature JIS C 0021	*Temperature : 90°C±2°C *Test duration : 1000+24/-0 hours Measurement to be made after keeping at room temperature for 24±2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -30 ~ 90°C.
Low temperature JIS C 0020	*Temperature : -30°C±2°C *Test duration : 1000+24/-0 hours Measurement to be made after keeping at room temperature for 24±2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -30 ~ 90°C.
Temperature cycle JIS C 0025	1. 30±3 minutes at -30±3°C, 2. 10~15 minutes at room temperature, 3. 30±3 minutes at +90±3°C, 4. 10~15 minutes at room temperature, Total 100 continuous cycles Measurement to be made after keeping at room temperature for 24±2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -30 ~ 90°C.
High temperature operation life (HTOL)	*Temperature : 90°C *VDD = 4.8V *Time : 1000+24/-0 hrs. Measurement to be made after keeping at room temperature for 24±2 hrs	No mechanical damage. Electrical specification shall satisfy the descriptions in electrical characteristics under the operational temperature range within -30 ~ 90°C.

Approval Sheet

Soldering Condition

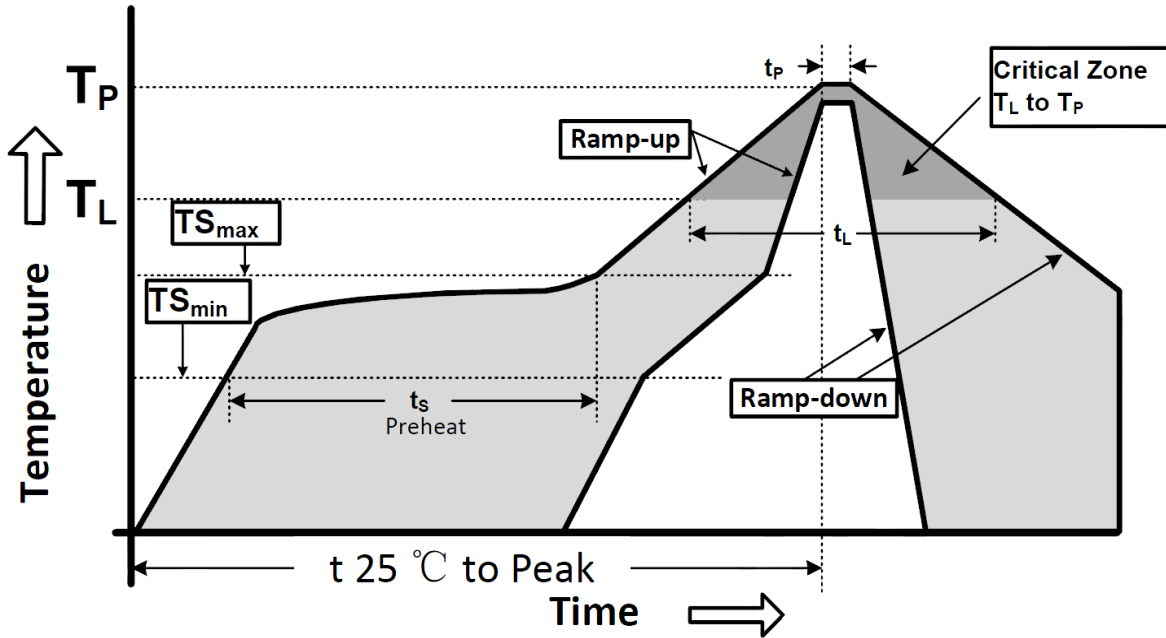

Soldering Condition as Below

Profile Parameter	Lead-Free Assembly, Convection, IR/Convection
Ramp-up rate (TS _{max} to T _p)	3°C/second max.
Preheat temperature (TS _{min} to TS _{max})	150°C to 200°C
Preheat time (t _s)	60 - 180 seconds
Time above TL, 217°C (t _L)	60 - 150 seconds
Peak temperature (T _p)	260°C
Time within 5°C of peak temperature (t _p)	20 - 40 seconds
Ramp-down rate	6°C/second max.
Time 25°C to peak temperature	8 minutes max.


Ordering code

RF	ASW	M	T2628B	T
RF module RF: Walsin RF Switch Device	Module type ASW: Antenna Switch	Application M: SP3T	Design Code	Packing T: Taping

Minimum Ordering Quantity: 3000 pcs per reel.

Approval Sheet


Packaging

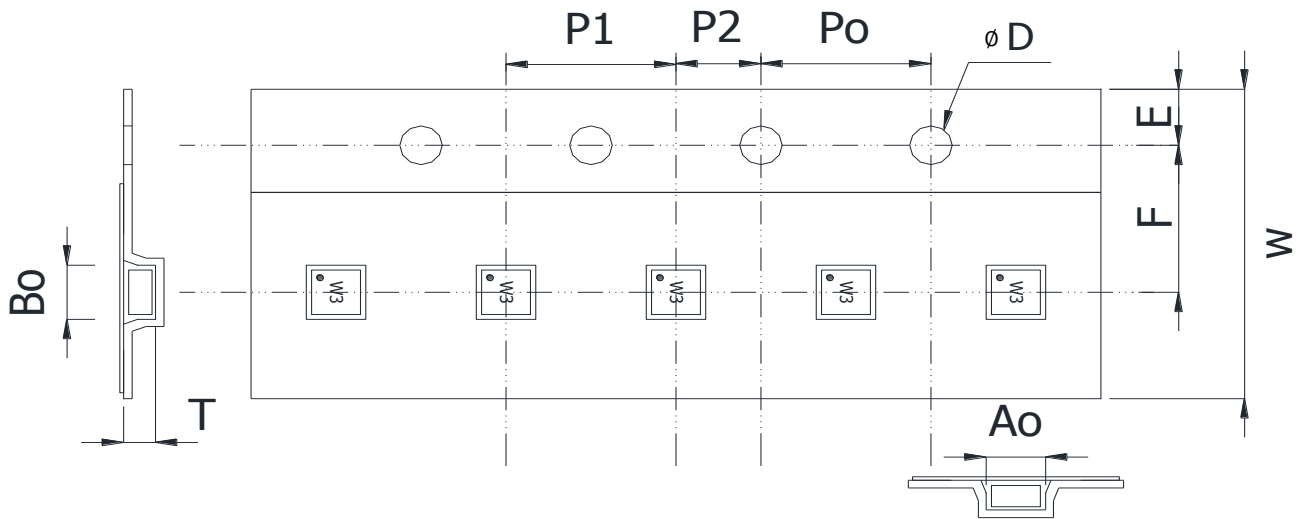

Plastic Tape specifications (unit :mm)

Index	Ao	Bo	ΦD	T	W
Dimension (mm)	1.32 ± 0.10	1.32 ± 0.10	1.50 ± 0.05	0.72 ± 0.10	8.0 ± 0.10
Index	E	F	Po	P1	P2
Dimension (mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.20	4.00 ± 0.10	2.00 ± 0.05

Reel dimensions

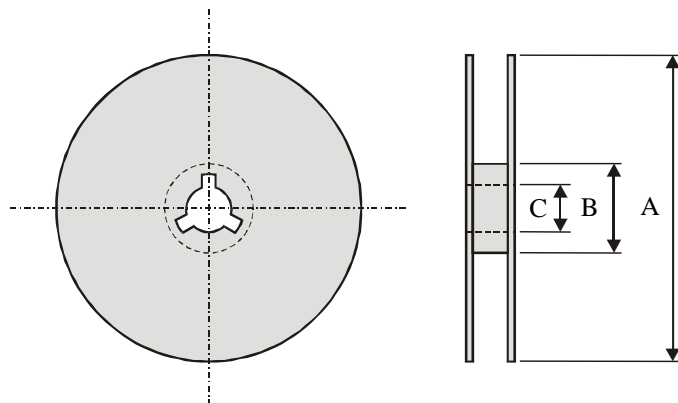

Index	A	B	C
Dimension (mm)	Φ178.0	Φ54.0	Φ13.2

Taping Quantity : 3000 pieces per 7" reel

Approval Sheet

Caution of handling

Limitation of Applications

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects, which might directly cause damage to the third party's life, body or property.

- (1) Aircraft equipment
- (2) Aerospace equipment
- (3) Undersea equipment
- (4) Medical equipment
- (5) Disaster prevention / crime prevention equipment
- (6) Traffic signal equipment
- (7) Transportation equipment (vehicles, trains, ships, etc.)
- (8) Applications of similar complexity and /or reliability requirements to the applications listed in the above.

Storage condition

- (1) Products should be used in 6 months from the day of WALSIN outgoing inspection, which can be confirmed.
- (2) Storage environment condition.
 - Products should be storage in the warehouse on the following conditions.
 - Temperature : -10 to +40°C
 - Humidity : 30 to 70% relative humidity
 - Don't keep products in corrosive gases such as sulfur. Chlorine gas or acid or it may cause oxidization of electrode, resulting in poor solderability.
 - Products should be storage on the palette for the prevention of the influence from humidity, dust and son on.
 - Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.
 - Products should be storage under the airtight packaged condition.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Walsin Technology\(华新科技\(华科\)\)](#)