

APPROVAL SHEET

PCB ANTENNA

698~960/1710~2690/3300~3800/5150~5850MHz
Working Frequency

Halogens Free Product

P/N: RFPCA111815IMMB901

Customer : _____
Customer 's Part No. : _____
Approval No. : _____
Issue Date : _____

*Contents in this sheet are subject to change without prior notice.

Version	Date	Description	Author
V01	2019 Mar.	New Release	HWCHAN

ELECTRICAL CHARACTERISTICS

Item	Specification
Frequency Range	698 ~960 / 1710 ~ 2690 /3300 ~3800 / 5150 ~5850 MHz (note-1)
Return Loss	-10.0 dB(Max)(@ 698 ~960 / 1710 ~ 2690 MHz) -6.0 dB(Max)(@ 3300 ~3800 / 5150 ~5850 MHz)
VSWR	2.0 (Max)(@ 698 ~960 MHz) 3.0 (Max)(@1710 ~ 2690 / 3300 ~3800 / 5150 ~5850 MHz)
Radiation	Omni-directional
Gain(peak)	3.32 dBi(@ 698 ~960 MHz) 6.04 dBi(@1710 ~ 2690 MHz) 5.36 dBi(@ 3300 ~3800 MHz) 4.39 dBi(@5150 ~5850 MHz)
Impedance	50 Ohm Nominal
Polarization	Linear Vertical
Admitted Power	1W
Operation Temperature	-20°C ~ +65°C

*note-1: Electrical characteristics will depend on customer's final application.

MATERIAL TABLE

Items	Description
PCB	FR4(Single Layer);T=0.4mm;黑漆
Double Tape	3M9888T
Cable	φ 1.37 Low Loss Coaxial Cable(Black)
Connector	IPEX Compatible(Gold)

ORDERING RULE



RF	PCA	1118	15	I	M	M	B	9	01
Type Code	Product Code	PCB Dimension (Unit: mm)	Cable Length (unit: cm)	Connector Brand	Type of Connector	Application	Project status	Wire Diameter	Project
Walsin RF Device	PCA: PCB Antenna	Per 2 digits of length, width e.g.: 1118 Length 118.0mm, Width 18.0mm	2 digits for cable length e.g.: Cable length:15.0 cm	A: N C:MCX D:IPEX III E: IPEX IV F: IPEX A13 H: Hirose I: IPEX M: MMCX S: SMA T: TNC U:MURATA N: None	A: Reverse Female B: Reverse Male F: Female M: Male N: None	0: 0GHz 3: 3GHz 6: 6GHz A: 2.4GHz ISM band B: GSM 900/1800 dual band G: GPS band L: 2.4/5.2/5.8 GHz tri-band M:LTE+Sub 6G +5G N: NFC T: LTE band W: WCDMA band	B: MP T:Dur ing Test X: Pile Run	0:None 1:∅ 0.81 3:∅ 1.13 6:RG316 7:∅ 1.37 8:RG178 9:∅ 1.37 Low Loss	01~99 series number

DIMENSIONS

	1	2	3	4	5																				
<p>ELECTRICAL 698~960MHz 1710~2690MHz 3300~3800MHz 5150~5850MHz</p> <div style="text-align: center;"> <p>D C B A A - center conductor B - Dielectric C - Outer conductor D - Jacket</p> </div>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>NO</th> <th>DESCRIPTION</th> <th>QTY</th> <th>REMARK</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>Body (PCA1118-1A)</td> <td>FR4(Single Layer);T=0.4mm,Black</td> <td>1</td> </tr> <tr> <td>B</td> <td>Double Tape</td> <td>3M9888T</td> <td>1</td> </tr> <tr> <td>C</td> <td>Coaxial cable</td> <td>Ø1.37 Low Loss Coaxial Cable(Black)</td> <td>1</td> </tr> <tr> <td>D</td> <td>Connector</td> <td>IPEX Compatible(Gold)</td> <td>1</td> </tr> </tbody> </table>				NO	DESCRIPTION	QTY	REMARK	A	Body (PCA1118-1A)	FR4(Single Layer);T=0.4mm,Black	1	B	Double Tape	3M9888T	1	C	Coaxial cable	Ø1.37 Low Loss Coaxial Cable(Black)	1	D	Connector	IPEX Compatible(Gold)	1	
NO	DESCRIPTION	QTY	REMARK																						
A	Body (PCA1118-1A)	FR4(Single Layer);T=0.4mm,Black	1																						
B	Double Tape	3M9888T	1																						
C	Coaxial cable	Ø1.37 Low Loss Coaxial Cable(Black)	1																						
D	Connector	IPEX Compatible(Gold)	1																						
<p>Front View</p> <p>Back View</p>																									
<p>RF Coaxial Connector direction: 100mm±90° 200mm±135° 200mm above dose not control</p> <p style="text-align: right;">※Mark <input type="checkbox"/> By mark, Focused inspection dimensions ※標記 <input type="checkbox"/> 記號者, 為重點檢驗尺寸</p>																									
			設計 DR. HWCHAN 2019.03.05	品名	版本 REV.																				
			核准 APPL. Marco	ARTICLE	A																				
			容許公差 TOLERANCE	RFPCOA111815IMMB901																					
			6以下.....±0.2 6以上~30.....±0.5 30以上~120.....±0.8 120以上~315.....±1.2 315以上~1000.....±2.0 1000以上~2000.....±3.0																						
LTR	DESCRIPTION	DATE	REQ. BY	單位 UNIT	比例 SCALE																				
				mm	****																				
				張數 SHEET	1																				


Test Report

EXPERIMENTAL SETUP

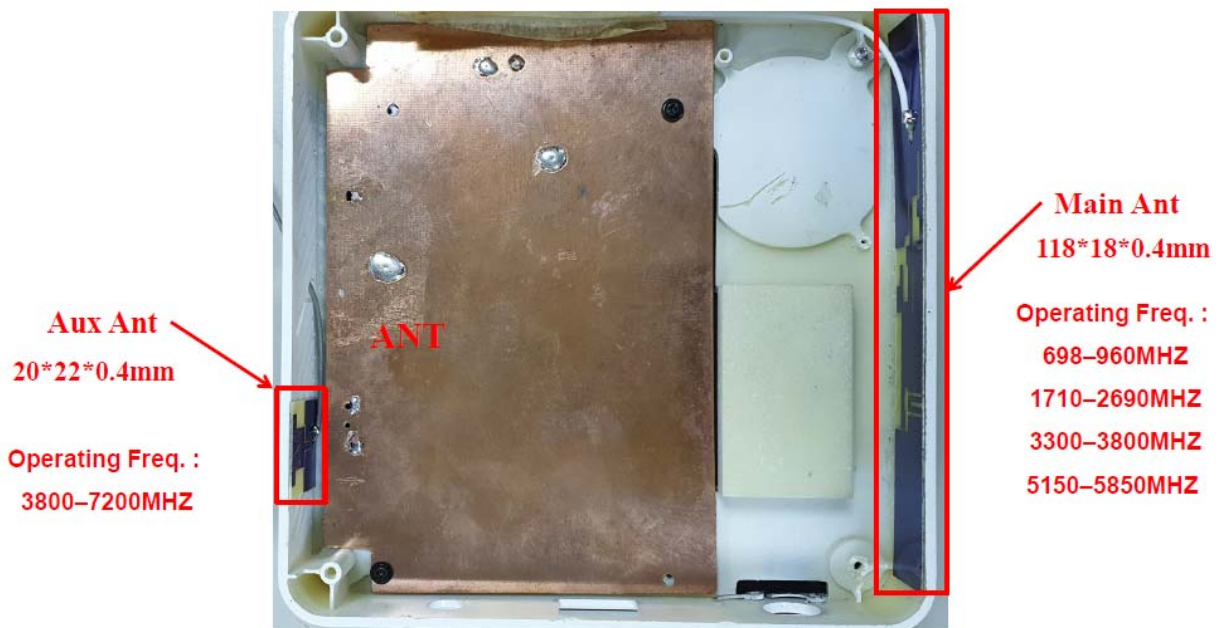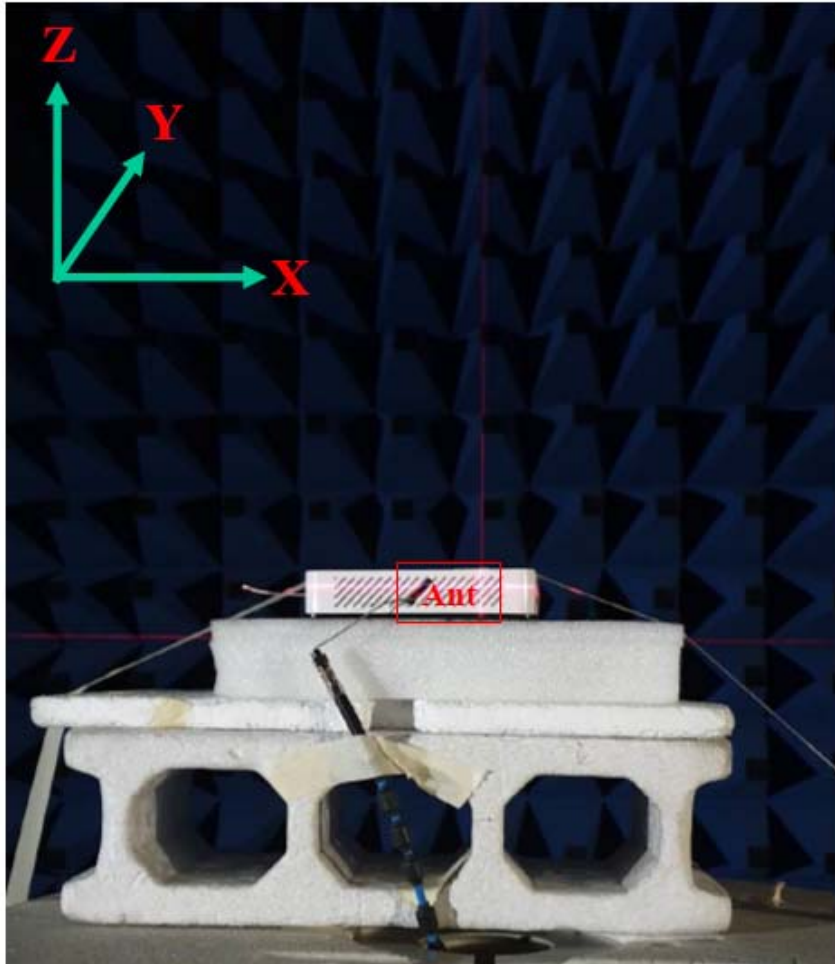

ELECTRICAL CHARACTERISTICS


VSWR Main Ant

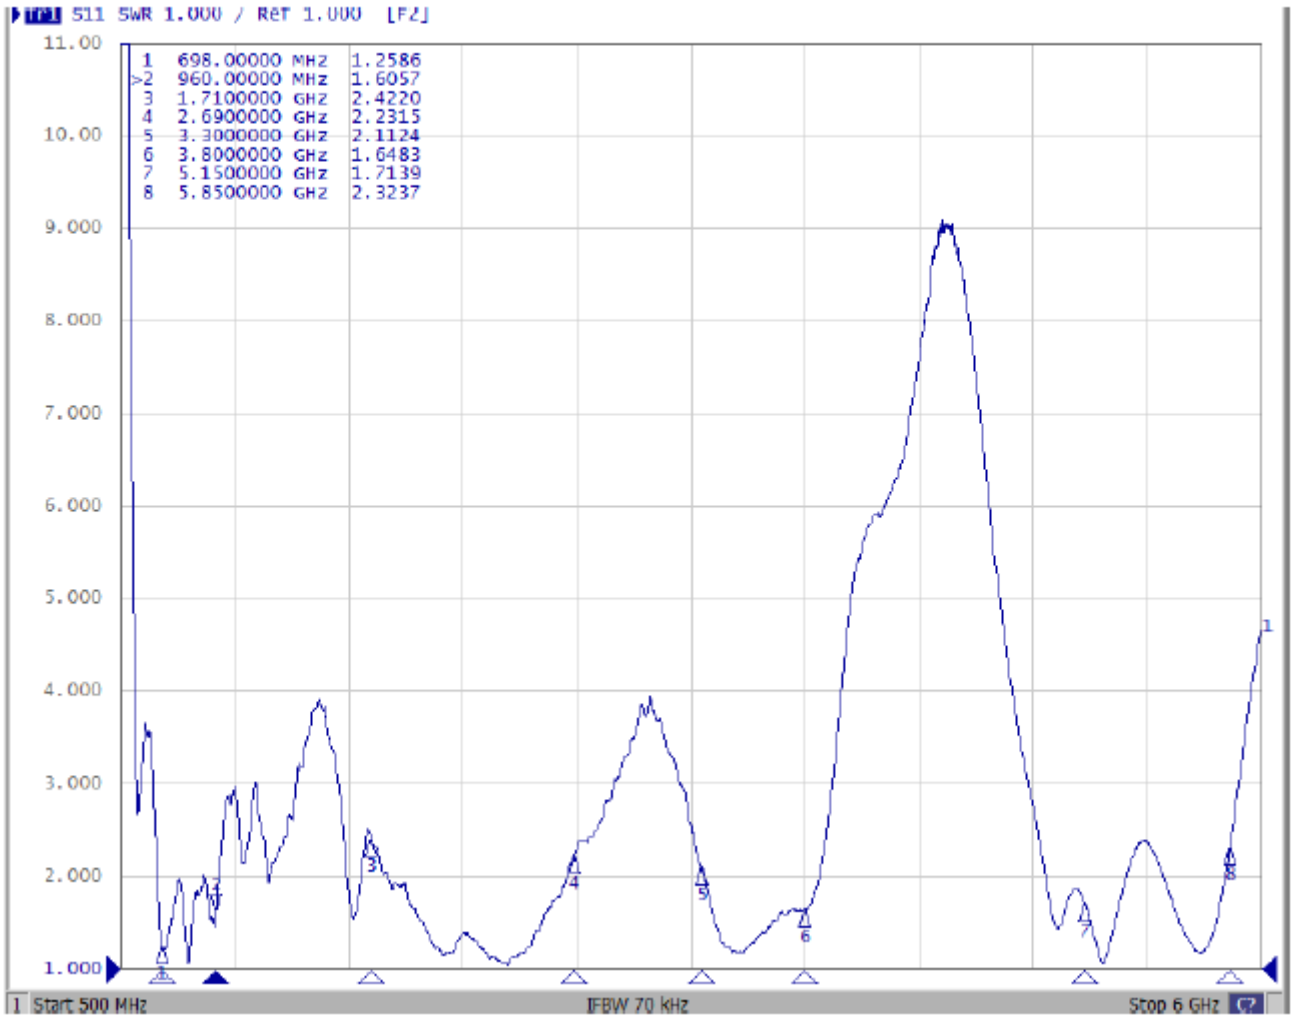


Antenna Efficiency and Peak Gain

698~960MHz



698MHz

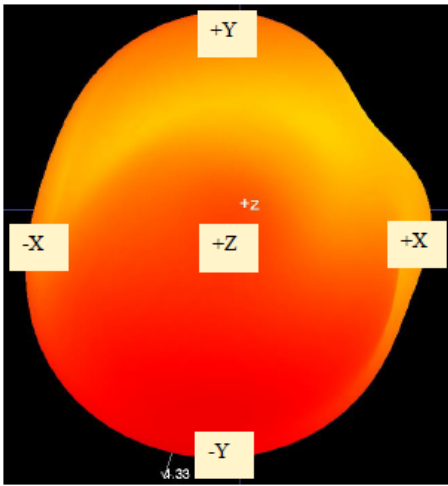


824MHz

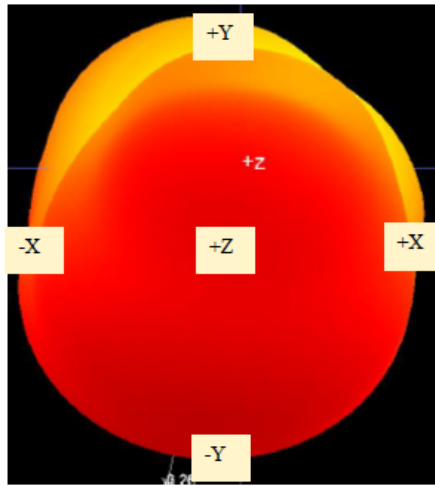

960MHz

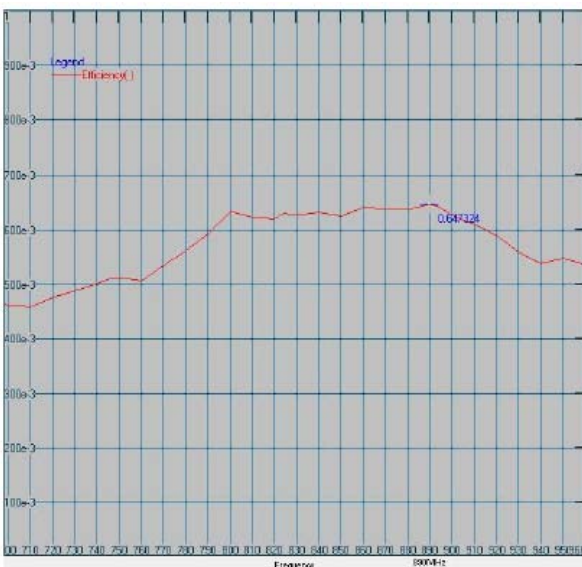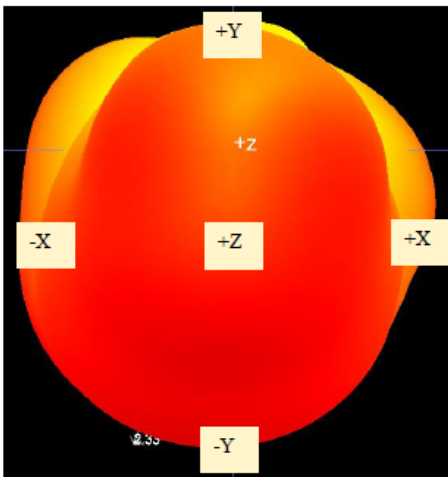


Maximum Efficiency at 890 MHz : 64.73 %

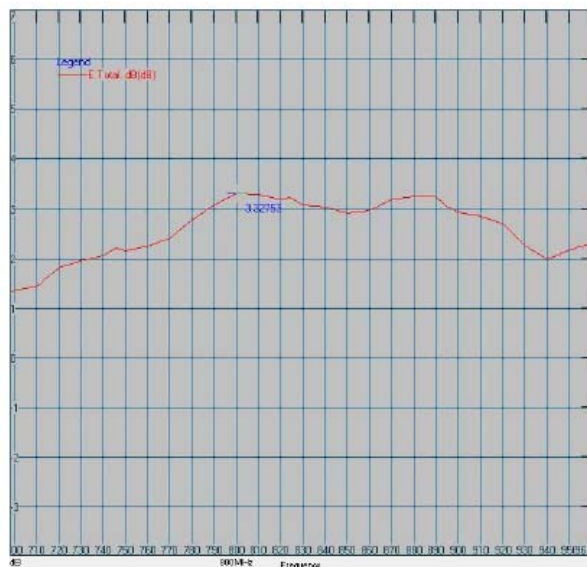


Maximum Peak Gain at 800 MHz : 3.32dBi

1710~2690MHz



1710MHz

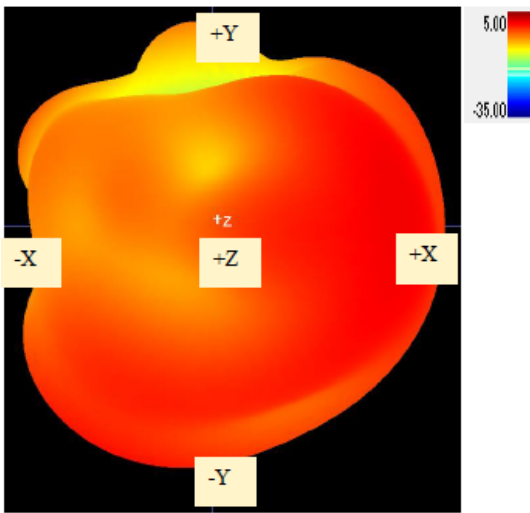

2170MHz

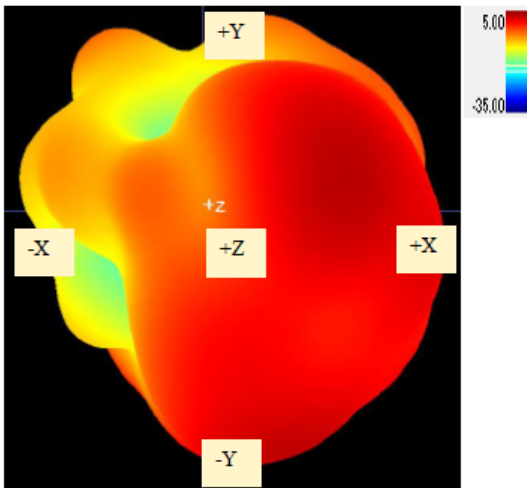

2690MHz

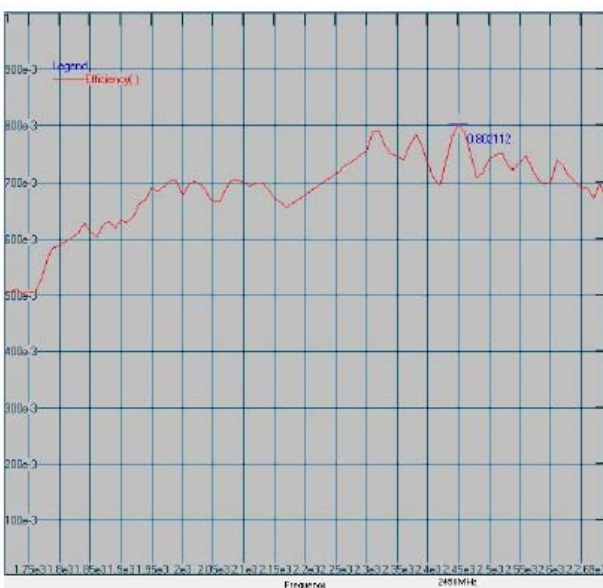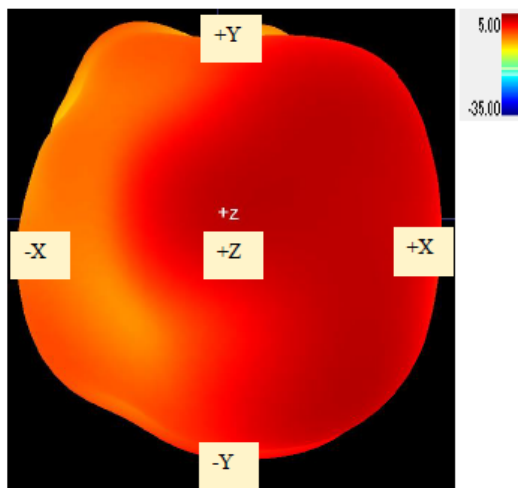

Maximum Efficiency at 2450 MHz : 80.21 %






Maximum Peak Gain at 1970 MHz : 6.04dBi


3300~3800MHz

3300MHz

3800MHz

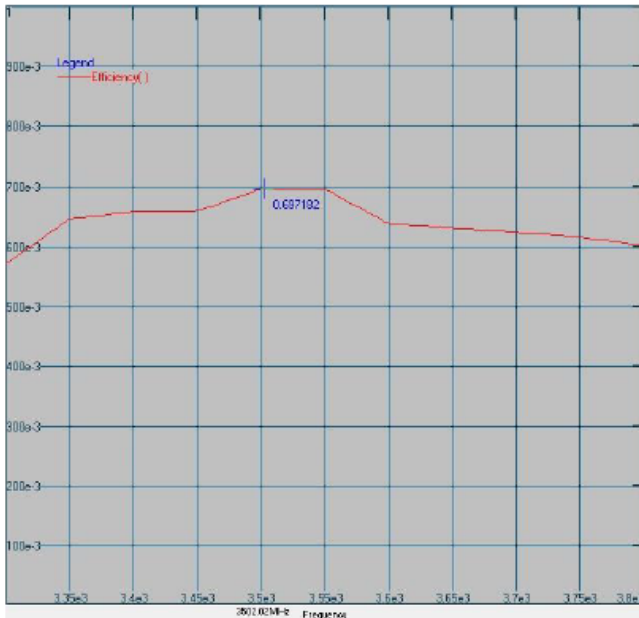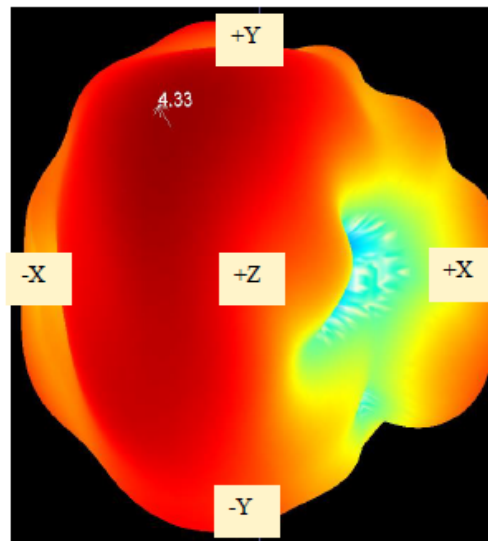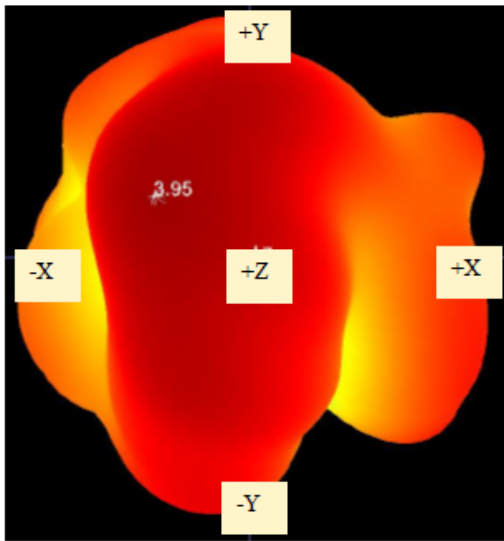


Maximum Efficiency at 3502 MHz : 69.71 %

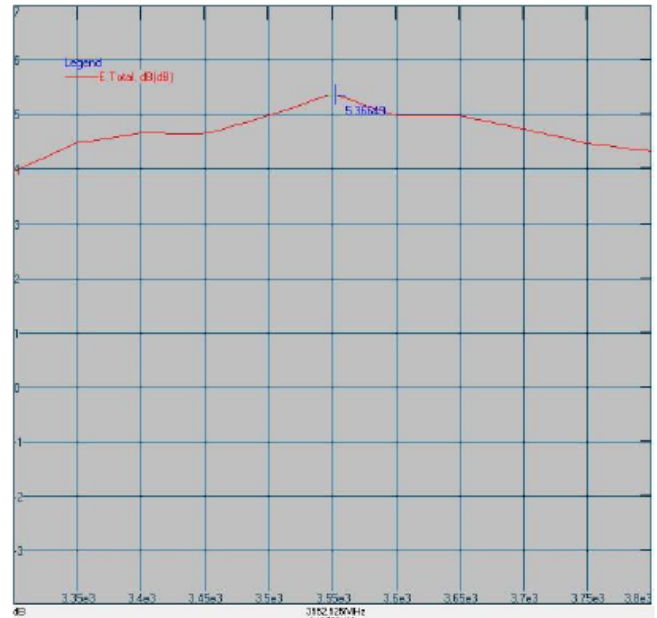


Maximum Peak Gain at 3552 MHz : 5.36dBi

5150~5850MHz



5150MHz

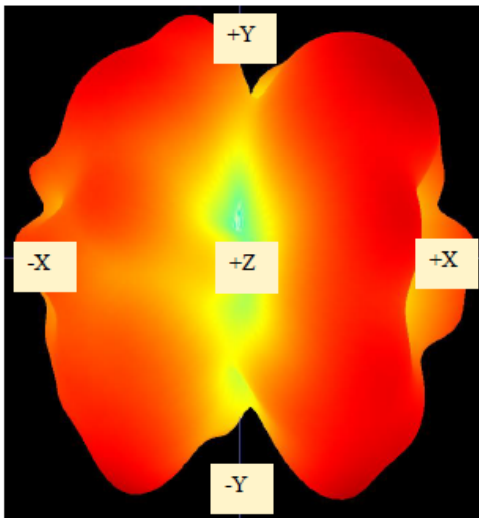


5500MHz

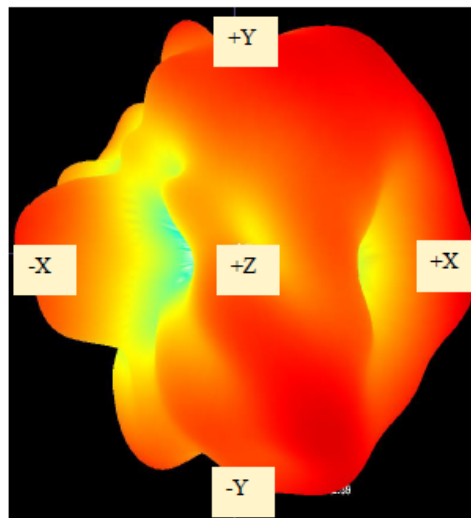

5850MHz

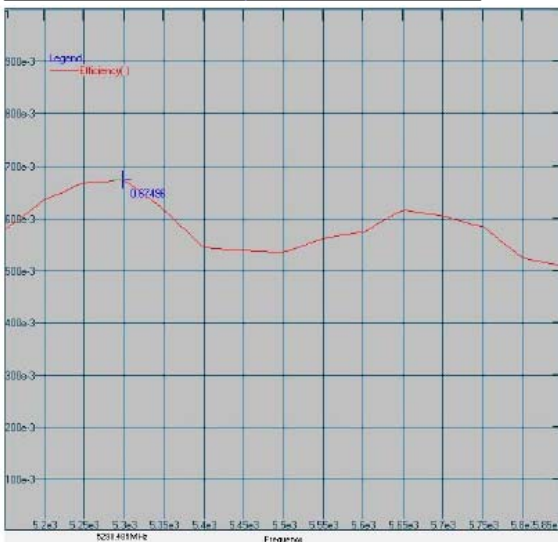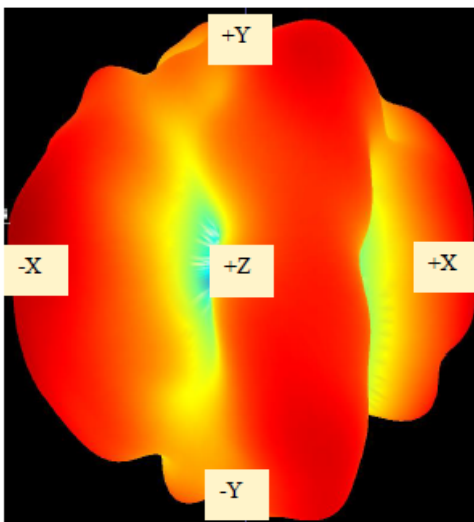

Maximum Efficiency at 5298 MHz : 67.49 %

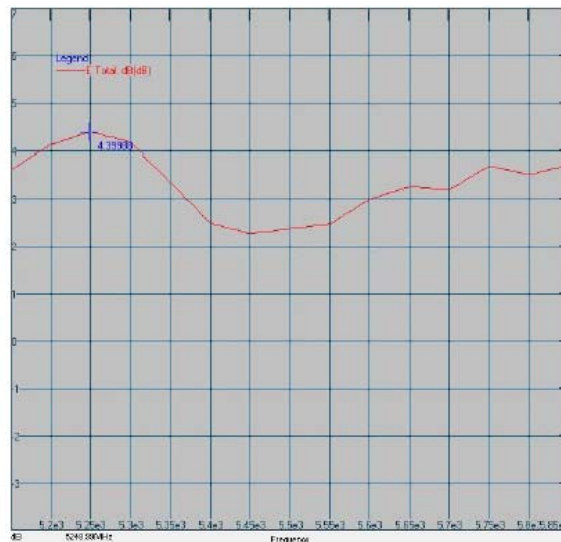

Maximum Peak Gain at 5248 MHz : 4.39dBi


RADIATION PATTERN

698~960MHz

X-Z Plane

Phi=0.00deg


Gain . dB

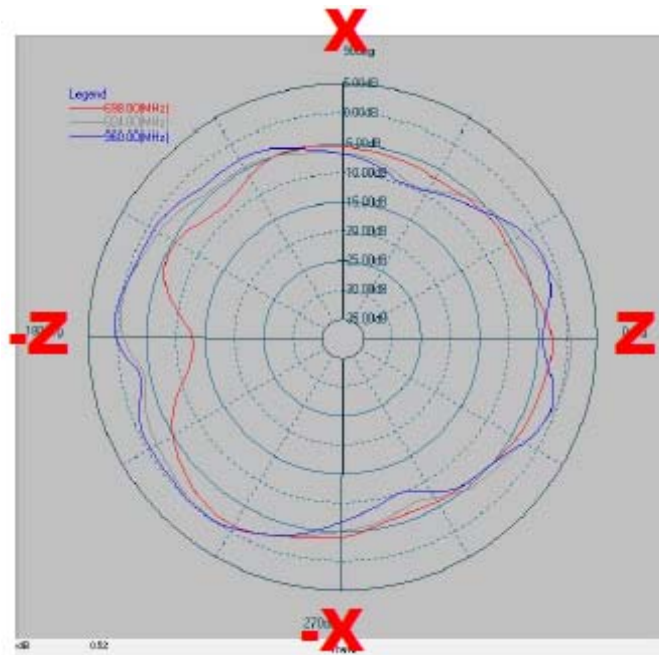

Y-Z Plane

Phi=90.00deg


Gain . dB

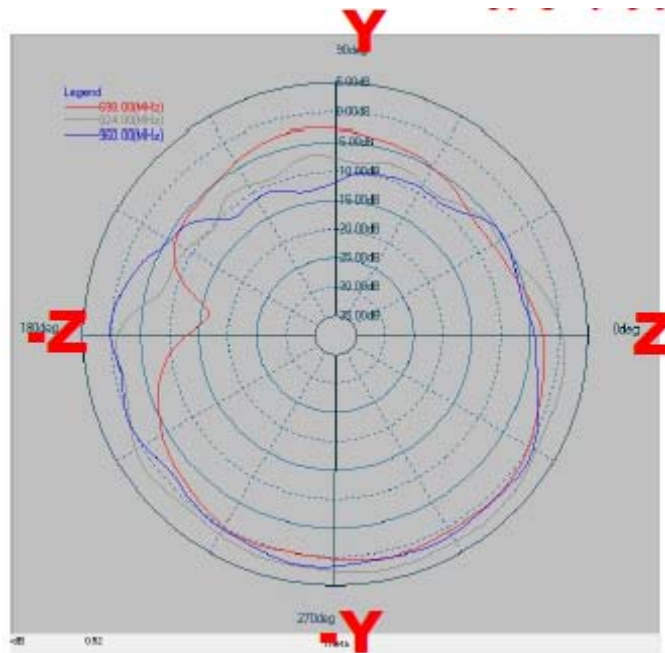

X-Y Plane

Theta=90.00deg

Gain . dB

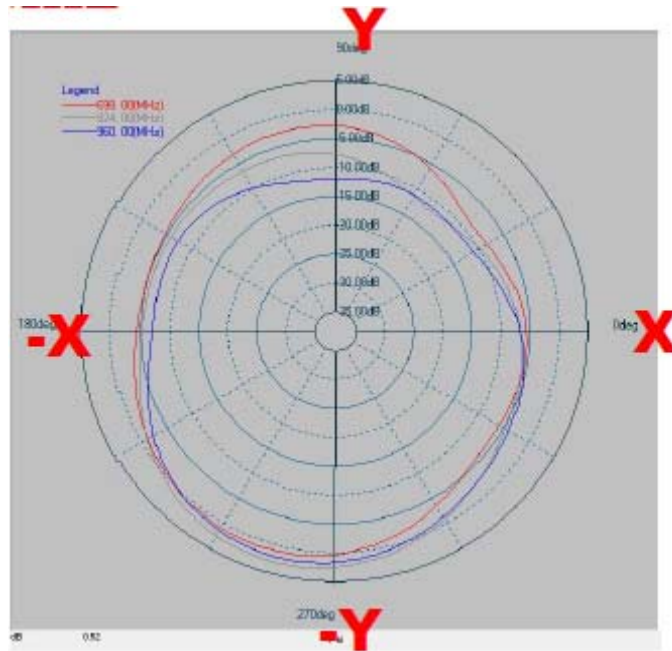


Frequency [MHz]	ZX plane		ZY plane		XY plane	
	Max Value [dB]	Average [dB]	Max Value [dB]	Average [dB]	Max Value [dB]	Average [dB]
698	-1.23 dB	-5.07 dB	1.00 dB	-2.53 dB	0.96 dB	-2.97 dB
824	0.60 dB	-2.87 dB	2.98 dB	-0.67 dB	2.83 dB	-2.52 dB
960	0.65 dB	-2.97 dB	1.77 dB	-1.81 dB	1.88 dB	-3.46 dB

1710~2690MHz

X-Z Plane

Phi=0.00deg


Gain . dB

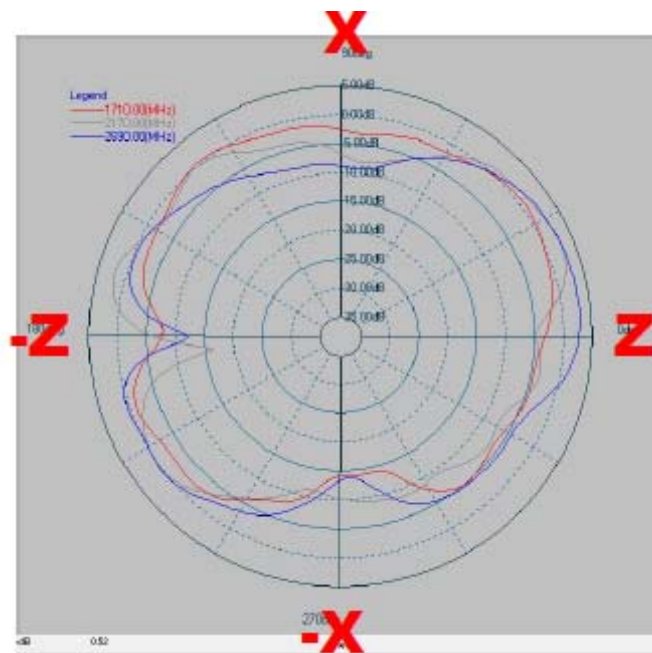

Y-Z Plane

Phi=90.00deg


Gain . dB

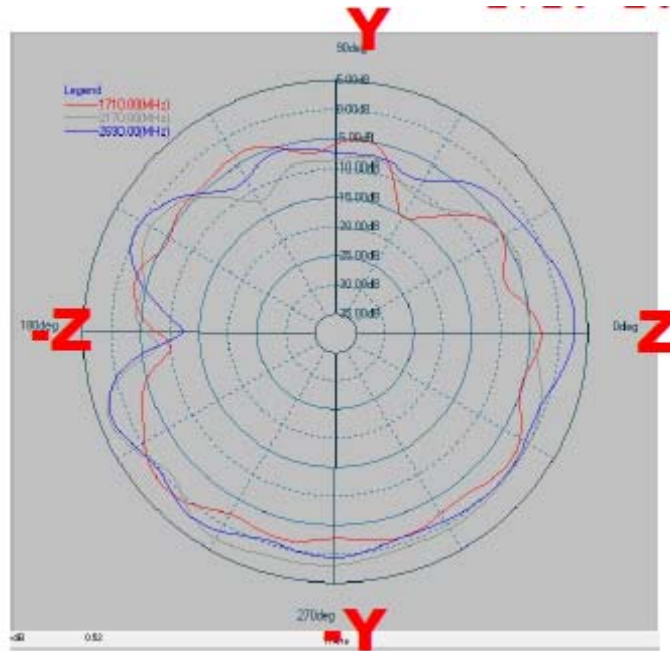

X-Y Plane

Theta=90.00deg

Gain . dB

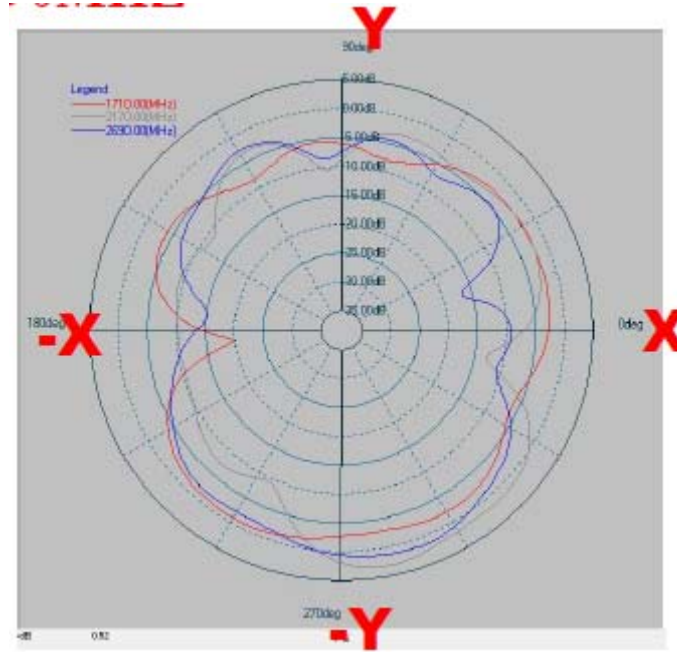


Frequency [MHz]	ZX plane		ZY plane		XY plane	
	Max Value [dB]	Average [dB]	Max Value [dB]	Average [dB]	Max Value [dB]	Average [dB]
1710	0.74 dB	-2.86 dB	1.34 dB	-3.44 dB	-0.97 dB	-3.94 dB
2170	2.73 dB	-2.48 dB	3.24 dB	-1.49 dB	3.05 dB	-3.00 dB
2690	3.07 dB	-1.97 dB	2.83 dB	-1.01 dB	1.36 dB	-3.84 dB

3300~3800MHz

X-Z Plane

Phi=0.00deg


Gain . dB

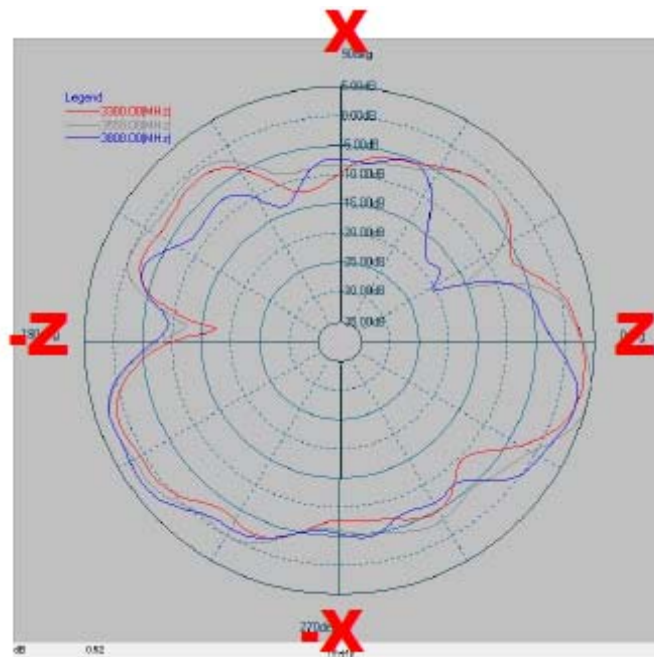

Y-Z Plane

Phi=90.00deg


Gain . dB

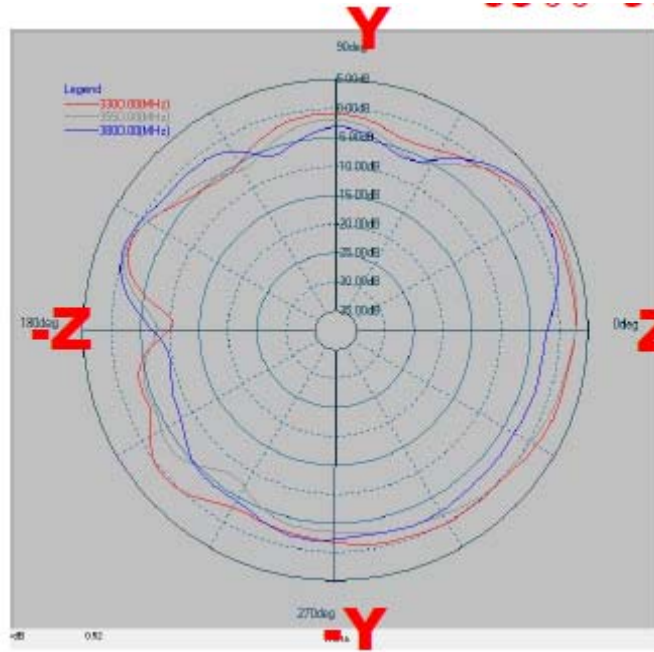

X-Y Plane

Theta=90.00deg

Gain . dB

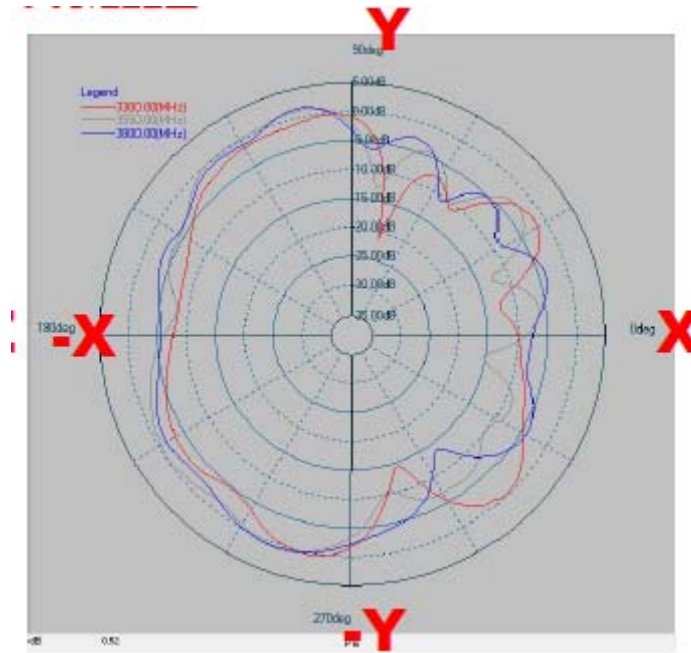


Frequency [MHz]	ZX plane		ZY plane		XY plane	
	Max Value [dB]	Average [dB]	Max Value [dB]	Average [dB]	Max Value [dB]	Average [dB]
3300	3.64 dB	-2.40 dB	3.12 dB	-0.57 dB	0.23 dB	-3.99 dB
3550	5.16 dB	-1.26 dB	3.95 dB	-1.09 dB	1.09 dB	-3.34 dB
3800	3.29 dB	-2.64 dB	2.69 dB	-2.17 dB	1.44 dB	-3.22 dB

5150~5850MHz

X-Z Plane

Phi=0.00deg


Gain . dB

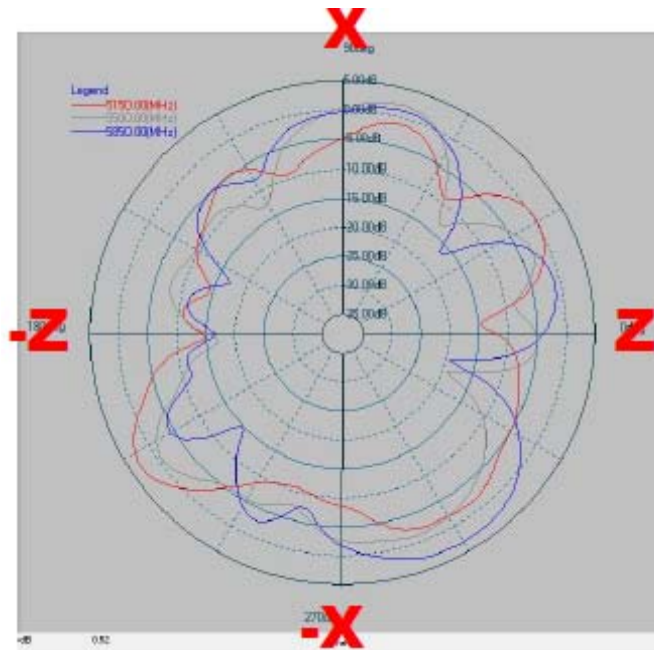

Y-Z Plane

Phi=90.00deg


Gain . dB

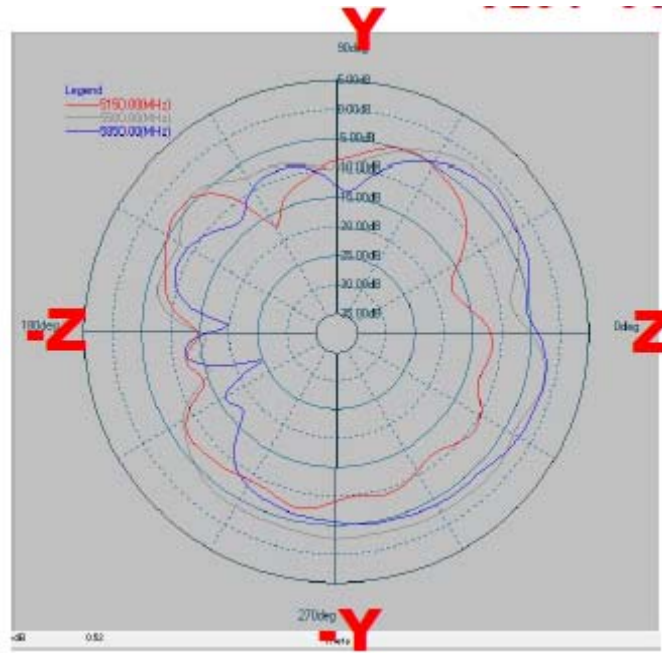

X-Y Plane

Theta=90.00deg

Gain . dB

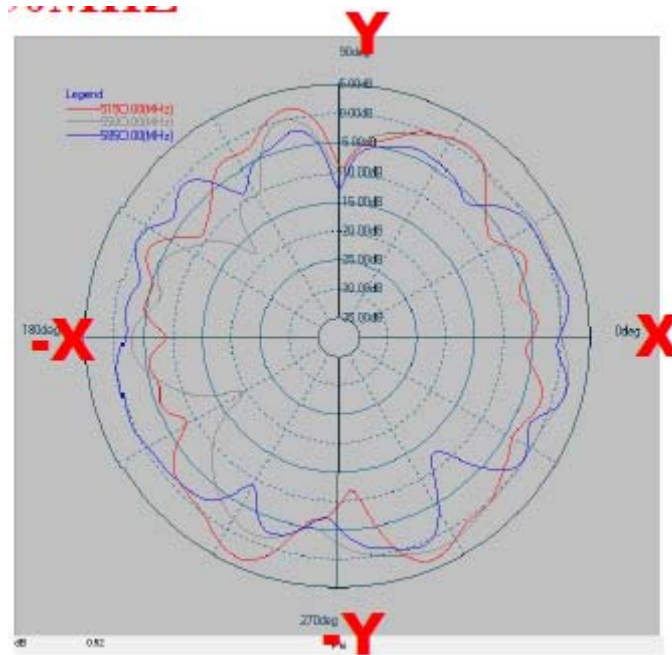

Frequency [MHz]	ZX plane		ZY plane		XY plane	
	Max Value [dB]	Average [dB]	Max Value [dB]	Average [dB]	Max Value [dB]	Average [dB]
5150	3.11 dB	-4.00 dB	-3.95 dB	-8.91 dB	3.47 dB	-2.01 dB
5500	1.97 dB	-4.22 dB	-1.06 dB	-4.53 dB	2.07 dB	-1.69 dB
5850	3.07 dB	-2.73 dB	-1.58 dB	-5.98 dB	1.94 dB	-1.93 dB

单击下面可查看定价，库存，交付和生命周期等信息

[>>Walsin Technology\(华新科技\)](#)