

# APPROVAL SHEET

**MULTILAYER CERAMIC CAPACITORS**

**Microwave Series (RF)**

**01005 to 1111 Sizes (6.3V to 1500V)**

**NP0 & X8G Dielectrics**

**Halogen Free & RoHS Compliance**



\*Contents in this sheet are subject to change without prior notice.

## Multilayer Ceramic Capacitors

### 1. INTRODUCTION

MLCC consists of a conducting material and electrodes. To manufacture a chip-type SMT and achieve miniaturization, high density and high efficiency, ceramic condensers are used.

WTC RF series MLCC is used at high frequencies generally have a small temperature coefficient of capacitance, typical within the  $\pm 30\text{ppm}/^\circ\text{C}$  required for NP0 (C0G) & X8G classification and have excellent conductivity internal electrode. Thus, WTC RF series MLCC will be with the feature of low ESR and high Q characteristics.

### 2. FEATURES

- a. High Q and low ESR performance at high frequency.
- b. Ultra low capacitance to 0.1pF.
- c. Can offer high precision tolerance to  $\pm 0.05\text{pF}$ .
- d. Quality improvement of telephone calls for low power loss and better performance.

### 3. APPLICATIONS

- a. Telecommunication products & equipments: Mobile phone, WLAN, Base station.
- b. RF module: Power amplifier, VCO.
- c. Tuners.

### 4. HOW TO ORDER


<b>RF</b>	<b>15</b>	<b>N</b>	<b>100</b>	<b>J</b>	<b>500</b>	<b>C</b>	<b>I</b>
<u>Series</u>	<u>Size</u>	<u>Dielectric</u>	<u>Capacitance</u>	<u>Tolerance</u>	<u>Rated voltage</u>	<u>Termination</u>	<u>Packaging</u>
RF=Ultra High Q & Low ESR	02=01005(0402) 03=0201 (0603) 15=0402 (1005) 18=0603 (1608) 11=0505 (1414) 21=0805 (2012) 22=1111 (2828)	N=NPO G=X8G	Two significant digits followed by no. of zeros. And R is in place of decimal point: eg.: 0R5=0.5pF 1R0=1.0pF 100=10x10 <sup>0</sup> =10pF	A= $\pm 0.05\text{pF}$ B= $\pm 0.1\text{pF}$ C= $\pm 0.25\text{pF}$  D= $\pm 0.5\text{pF}$ F= $\pm 1\%$ G= $\pm 2\%$ J= $\pm 5\%$	Two significant digits followed by no. of zeros. And R is in place of decimal point: eg.: 6R3=6.3 VDC 100=10 VDC 250=25 VDC 500=50 VDC 101=100 VDC 201=200 VDC 251=250 VDC 501=500 VDC 152=1500 VDC	C=Cu/Ni/Sn	T=7" reeled G= 13" reeled

Multilayer Ceramic Capacitors

## 5. EXTERNAL DIMENSIONS

Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol	Remark	M <sub>B</sub> (mm)
01005 (0402)	0.40±0.02	0.20±0.02	0.20±0.02	V	# 0.10±0.03
0201 (0603)	0.60±0.03	0.30±0.03	0.30±0.03	L	# 0.15±0.05
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05	N	# 0.25±0.05/-0.10
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07	S	0.40±0.15
	1.60 +0.15/-0.10	0.80 +0.15/-0.10	0.50±0.10	H	
0805 (2012)	2.00±0.15	1.25±0.10	0.60±0.10	A	0.50±0.20
	2.00±0.20	1.25±0.20	0.85±0.10	T	
0505 (1414)	1.40 +0.38/-0.25	1.40±0.38	1.15±0.15	J	# 0.25±0.25/-0.13
1111 (2828)	2.79 +0.51/-0.25	2.79±0.38	≤ 1.78	G	# 0.38±0.25

# Reflow soldering only is recommended.

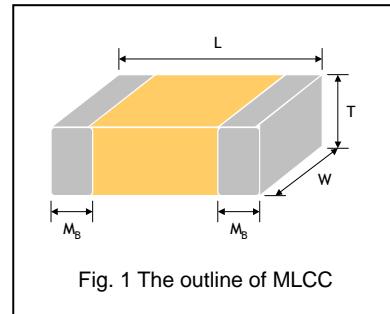

## 6. GENERAL ELECTRICAL DATA

Dielectric	NP0	X8G
Size	01005, 0201, 0402, 0505, 0603, 0805, 1111	0805
Capacitance*	0.1pF to 1000pF	0.2pF~82pF
Capacitance tolerance	Cap≤5pF: A (±0.05pF), B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: B (±0.1pF), C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%)	
Rated voltage (WVDC)	6.3V, 10V, 25V, 50V, 100V, 200V, 250V, 500V, 1500V	250V, 500V
Q*	01005, 0201, 0402/25V~50V: Cap<30pF: Q≥400+20C; Cap≥30pF: Q≥1000 0402/100V~200V, 0603, 0805, 0505, 1111: Cap<30pF: Q≥800+20C; Cap≥30pF: Q≥1400	
Insulation resistance at Ur	≥10GΩ or RxC≥100Ω·F whichever is smaller.	
Operating temperature	-55 to +125°C	-55 to +150°C
Capacitance change	±30ppm/°C	
Termination	Ni/Sn (lead-free termination)	

\* Measured at the conditions of 25°C ambient temperature and 30~70% related humidity.

Apply 1.0±0.2VRms, 1.0MHz±10% for Cap≤1000pF and 1.0±0.2VRms, 1.0kHz±10% for Cap>1000pF.

## 7. PACKAGING DIMENSION AND QUANTITY

Size	Thickness (mm)/Symbol	Paper tape	
		7" reel	13" reel
01005 (0402)	0.20±0.02	V	20,000
0201 (0603)	0.30±0.03	L	15,000
0402 (1005)	0.50±0.05	N	10,000
0603 (1608)	0.80±0.07	S	4,000
	0.50±0.10	H	4,000
0805 (2012)	0.60±0.10	A	4,000
	0.85±0.10	T	4,000
Size	Thickness (mm)/Symbol	Plastic tape	
		7" reel	13" reel
0505 (1414)	1.15±0.15	J	3,000
1111 (2828)	≤ 1.78	G	2,000

Unit: pieces

Multilayer Ceramic Capacitors

**8. CAPACITANCE RANGE (NP0)**

DIELECTRIC	NP0		Tolerance	
SIZE	01005			
RATED VOLTAGE (VDC)	16	25		
0.2pF (0R2)	V	V	A, B	
0.3pF (0R3)	V	V	A, B	
0.4pF (0R4)	V	V	A, B	
0.5pF (0R5)	V	V	A, B, C	
0.6pF (0R6)	V	V	A, B, C	
0.7pF (0R7)	V	V	A, B, C	
0.75pF (R75)	V	V	A, B, C	
0.8pF (0R8)	V	V	A, B, C	
0.9pF (0R9)	V	V	A, B, C	
1.0pF (1R0)	V	V	A, B, C	
1.1pF (1R1)	V	V	A, B, C	
1.2pF (1R2)	V	V	A, B, C	
1.3pF (1R3)	V	V	A, B, C	
1.5pF (1R5)	V	V	A, B, C	
1.6pF (1R6)	V	V	A, B, C	
1.8pF (1R8)	V	V	A, B, C	
2.0pF (2R0)	V	V	A, B, C	
2.2pF (2R2)	V	V	A, B, C	
2.4pF (2R4)	V	V	A, B, C	
2.7pF (2R7)	V	V	A, B, C	
3.0pF (3R0)	V	V	A, B, C	
3.3pF (3R3)	V	V	A, B, C	
3.6pF (3R6)	V	V	A, B, C	
3.9pF (3R9)	V	V	A, B, C	
4.0pF (4R0)	V	V	A, B, C	
4.3pF (4R3)	V	V	A, B, C	
4.7pF (4R7)	V	V	A, B, C	
5.0pF (5R0)	V	V	A, B, C	
5.1pF (5R1)	V	V	B, C, D	
5.6pF (5R6)	V	V	B, C, D	
6.0pF (6R0)	V	V	B, C, D	
6.2pF (6R2)	V		B, C, D	
6.7pF (6R7)	V		B, C, D	
6.8pF (6R8)	V		B, C, D	
7.0pF (7R0)	V		B, C, D	
7.5pF (7R5)	V		B, C, D	
8.0pF (8R0)	V		B, C, D	
8.2pF (8R2)	V		B, C, D	
9.0pF (9R0)	V		B, C, D	
9.1pF (9R1)	V		B, C, D	
10pF (100)	V	V	C, D, G	
12pF (120)	V	V	F, G, J	
15pF (150)	V	V	F, G, J	
20pF (200)	V	V	F, G, J	
22pF (220)	V	V	F, G, J	

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

DIELECTRIC	NP0									
SIZE	0201					0402				Tolerance
RATED VOLTAGE (VDC)	6.3	10	25	50	100	25	50	100	200	
0.1pF (0R1)	L	L	L	L	L	N	N	N	N	A, B
0.2pF (0R2)	L	L	L	L	L	N	N	N	N	A, B
0.3pF (0R3)	L	L	L	L	L	N	N	N	N	A, B
0.4pF (0R4)	L	L	L	L	L	N	N	N	N	A, B
0.5pF (0R5)	L	L	L	L	L	N	N	N	N	A, B, C
0.6pF (0R6)	L	L	L	L	L	N	N	N	N	A, B, C
0.7pF (0R7)	L	L	L	L	L	N	N	N	N	A, B, C
0.75pF (R75)	L	L	L	L	L	N	N	N	N	A, B, C
0.8pF (0R8)	L	L	L	L	L	N	N	N	N	A, B, C
0.9pF (0R9)	L	L	L	L	L	N	N	N	N	A, B, C
1.0pF (1R0)	L	L	L	L	L	N	N	N	N	A, B, C
1.1pF (1R1)	L	L	L	L	L	N	N	N	N	A, B, C
1.2pF (1R2)	L	L	L	L	L	N	N	N	N	A, B, C
1.3pF (1R3)	L	L	L	L	L	N	N	N	N	A, B, C
1.4pF (1R4)	L	L	L	L	L	N	N	N	N	A, B, C
1.5pF (1R5)	L	L	L	L	L	N	N	N	N	A, B, C
1.6pF (1R6)	L	L	L	L	L	N	N	N	N	A, B, C
1.7pF (1R7)	L	L	L	L	L	N	N	N	N	A, B, C
1.8pF (1R8)	L	L	L	L	L	N	N	N	N	A, B, C
1.9pF (1R9)	L	L	L	L	L	N	N	N	N	A, B, C
2.0pF (2R0)	L	L	L	L	L	N	N	N	N	A, B, C
2.1pF (2R1)	L	L	L	L	L	N	N	N	N	A, B, C
2.2pF (2R2)	L	L	L	L	L	N	N	N	N	A, B, C
2.3pF (2R3)	L	L	L	L	L	N	N	N	N	A, B, C
2.4pF (2R4)	L	L	L	L	L	N	N	N	N	A, B, C
2.5pF (2R5)	L	L	L	L	L	N	N	N	N	A, B, C
2.6pF (2R6)	L	L	L	L	L	N	N	N	N	A, B, C
2.7pF (2R7)	L	L	L	L	L	N	N	N	N	A, B, C
2.8pF (2R8)	L	L	L	L	L	N	N	N	N	A, B, C
2.9pF (2R9)	L	L	L	L	L	N	N	N	N	A, B, C
3.0pF (3R0)	L	L	L	L	L	N	N	N	N	A, B, C
3.1pF (3R1)	L	L	L	L	L	N	N	N	N	A, B, C
3.2pF (3R2)	L	L	L	L	L	N	N	N	N	A, B, C
3.3pF (3R3)	L	L	L	L	L	N	N	N	N	A, B, C
3.4pF (3R4)	L	L	L	L	L	N	N	N	N	A, B, C
3.5pF (3R5)	L	L	L	L	L	N	N	N	N	A, B, C
3.6pF (3R6)	L	L	L	L	L	N	N	N	N	A, B, C
3.7pF (3R7)	L	L	L	L	L	N	N	N	N	A, B, C
3.8pF (3R8)	L	L	L	L	L	N	N	N	N	A, B, C
3.9pF (3R9)	L	L	L	L	L	N	N	N	N	A, B, C
4.0pF (4R0)	L	L	L	L	L	N	N	N	N	A, B, C
4.1pF (4R1)	L	L	L	L	L	N	N	N	N	A, B, C
4.2pF (4R2)	L	L	L	L	L	N	N	N	N	A, B, C
4.3pF (4R3)	L	L	L	L	L	N	N	N	N	A, B, C
4.4pF (4R4)	L	L	L	L	L	N	N	N	N	A, B, C
4.5pF (4R5)	L	L	L	L	L	N	N	N	N	A, B, C
4.6pF (4R6)	L	L	L	L	L	N	N	N	N	A, B, C
4.7pF (4R7)	L	L	L	L	L	N	N	N	N	A, B, C
4.8pF (4R8)	L	L	L	L	L	N	N	N	N	A, B, C
4.9pF (4R9)	L	L	L	L	L	N	N	N	N	A, B, C
5.0pF (5R0)	L	L	L	L	L	N	N	N	N	A, B, C
5.1pF (5R1)	L	L	L	L	L	N	N	N	N	B, C, D
5.2pF (5R2)	L	L	L	L	L	N	N	N	N	B, C, D
5.3pF (5R3)	L	L	L	L	L	N	N	N	N	B, C, D
5.4pF (5R4)	L	L	L	L	L	N	N	N	N	B, C, D
5.5pF (5R5)	L	L	L	L	L	N	N	N	N	B, C, D
5.6pF (5R6)	L	L	L	L	L	N	N	N	N	B, C, D
5.7pF (5R7)	L	L	L	L	L	N	N	N	N	B, C, D
5.8pF (5R8)	L	L	L	L	L	N	N	N	N	B, C, D
5.9pF (5R9)	L	L	L	L	L	N	N	N	N	B, C, D
6.0pF (6R0)	L	L	L	L	L	N	N	N	N	B, C, D

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

DIELECTRIC	NP0									
SIZE	0201					0402				
RATED VOLTAGE (VDC)	6.3	10	25	50	100	25	50	100	200	Tolerance
6.1pF (6R1)	L	L	L	L	L	N	N	N	N	B, C, D
6.2pF (6R2)	L	L	L	L	L	N	N	N	N	B, C, D
6.3pF (6R3)	L	L	L	L	L	N	N	N	N	B, C, D
6.4pF (6R4)	L	L	L	L	L	N	N	N	N	B, C, D
6.5pF (6R5)	L	L	L	L	L	N	N	N	N	B, C, D
6.6pF (6R6)	L	L	L	L	L	N	N	N	N	B, C, D
6.7pF (6R7)	L	L	L	L	L	N	N	N	N	B, C, D
6.8pF (6R8)	L	L	L	L	L	N	N	N	N	B, C, D
6.9pF (6R9)	L	L	L	L	L	N	N	N	N	B, C, D
7.0pF (7R0)	L	L	L	L	L	N	N	N	N	B, C, D
7.1pF (7R1)	L	L	L	L	L	N	N	N	N	B, C, D
7.2pF (7R2)	L	L	L	L	L	N	N	N	N	B, C, D
7.3pF (7R3)	L	L	L	L	L	N	N	N	N	B, C, D
7.4pF (7R4)	L	L	L	L	L	N	N	N	N	B, C, D
7.5pF (7R5)	L	L	L	L	L	N	N	N	N	B, C, D
7.6pF (7R6)	L	L	L	L	L	N	N	N	N	B, C, D
7.7pF (7R7)	L	L	L	L	L	N	N	N	N	B, C, D
7.8pF (7R8)	L	L	L	L	L	N	N	N	N	B, C, D
7.9pF (7R9)	L	L	L	L	L	N	N	N	N	B, C, D
8.0pF (8R0)	L	L	L	L	L	N	N	N	N	B, C, D
8.1pF (8R1)	L	L	L	L	L	N	N	N	N	B, C, D
8.2pF (8R2)	L	L	L	L	L	N	N	N	N	B, C, D
8.3pF (8R3)	L	L	L	L	L	N	N	N	N	B, C, D
8.4pF (8R4)	L	L	L	L	L	N	N	N	N	B, C, D
8.5pF (8R5)	L	L	L	L	L	N	N	N	N	B, C, D
8.6pF (8R6)	L	L	L	L	L	N	N	N	N	B, C, D
8.7pF (8R7)	L	L	L	L	L	N	N	N	N	B, C, D
8.8pF (8R8)	L	L	L	L	L	N	N	N	N	B, C, D
8.9pF (8R9)	L	L	L	L	L	N	N	N	N	B, C, D
9.0pF (9R0)	L	L	L	L	L	N	N	N	N	B, C, D
9.1pF (9R1)	L	L	L	L	L	N	N	N	N	B, C, D
9.2pF (9R2)	L	L	L	L	L	N	N	N	N	B, C, D
9.3pF (9R3)	L	L	L	L	L	N	N	N	N	B, C, D
9.4pF (9R4)	L	L	L	L	L	N	N	N	N	B, C, D
9.5pF (9R5)	L	L	L	L	L	N	N	N	N	B, C, D
9.6pF (9R6)	L	L	L	L	L	N	N	N	N	B, C, D
9.7pF (9R7)	L	L	L	L	L	N	N	N	N	B, C, D
9.8pF (9R8)	L	L	L	L	L	N	N	N	N	B, C, D
9.9pF (9R9)	L	L	L	L	L	N	N	N	N	B, C, D
10pF (100)	L	L	L	L	L	N	N	N	N	F, G, J
11pF (110)	L	L	L	L		N	N	N	N	F, G, J
12pF (120)	L	L	L	L		N	N	N	N	F, G, J
13pF (130)	L	L	L	L		N	N	N	N	F, G, J
15pF (150)	L	L	L	L		N	N	N	N	F, G, J
16pF (160)	L	L	L	L		N	N	N	N	F, G, J
18pF (180)	L	L	L	L		N	N	N	N	F, G, J
20pF (200)	L	L	L	L		N	N	N	N	F, G, J
22pF (220)	L	L	L			N	N	N	N	F, G, J
24pF (240)	L	L	L			N	N	N	N	F, G, J
27pF (270)	L	L	L			N	N	N	N	F, G, J
30pF (300)	L	L	L			N	N	N	N	F, G, J
33pF (330)	L	L	L			N	N	N	N	F, G, J
36pF (360)						N	N	N		F, G, J
39pF (390)						N	N	N		F, G, J
43pF (430)						N	N	N		F, G, J
47pF (470)						N	N	N		F, G, J
56pF (560)						N	N	N		F, G, J
68pF (680)						N	N			F, G, J
82pF (820)						N	N			F, G, J
100pF (101)						N	N			F, G, J

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

DIELECTRIC	NP0										
SIZE	0505			0603			0805				Tolerance
RATED VOLTAGE (VDC)	50	100	250	50	100	250	50	100	250	500	
Capacitance	0.1pF (0R1)			H	H	H					A, B
	0.2pF (0R2)			H	H	H	A	A	A	A	A, B
	0.3pF (0R3)			S	S	S	T	T	T	T	A, B
	0.4pF (0R4)	J	J	J	S	S	S	T	T	T	A, B
	0.5pF (0R5)	J	J	J	S	S	S	T	T	T	A, B, C
	0.6pF (0R6)	J	J	J	S	S	S	T	T	T	A, B, C
	0.7pF (0R7)	J	J	J	S	S	S	T	T	T	A, B, C
	0.8pF (0R8)	J	J	J	S	S	S	T	T	T	A, B, C
	0.9pF (0R9)	J	J	J	S	S	S	T	T	T	A, B, C
	1.0pF (1R0)	J	J	J	S	S	S	T	T	T	A, B, C
	1.1pF (1R1)	J	J	J	S	S	S	T	T	T	A, B, C
	1.2pF (1R2)	J	J	J	S	S	S	T	T	T	A, B, C
	1.3pF (1R3)	J	J	J	S	S	S	T	T	T	A, B, C
	1.4pF (1R4)	J	J	J	S	S	S	T	T	T	A, B, C
	1.5pF (1R5)	J	J	J	S	S	S	T	T	T	A, B, C
	1.6pF (1R6)	J	J	J	S	S	S	T	T	T	A, B, C
	1.7pF (1R7)	J	J	J	S	S	S	T	T	T	A, B, C
	1.8pF (1R8)	J	J	J	S	S	S	T	T	T	A, B, C
	1.9pF (1R9)	J	J	J	S	S	S	T	T	T	A, B, C
	2.0pF (2R0)	J	J	J	S	S	S	T	T	T	A, B, C
	2.1pF (2R1)	J	J	J	S	S	S	T	T	T	A, B, C
	2.2pF (2R2)	J	J	J	S	S	S	T	T	T	A, B, C
	2.3pF (2R3)	J	J	J	S	S	S	T	T	T	A, B, C
	2.4pF (2R4)	J	J	J	S	S	S	T	T	T	A, B, C
	2.5pF (2R5)	J	J	J	S	S	S	T	T	T	A, B, C
	2.6pF (2R6)	J	J	J	S	S	S	T	T	T	A, B, C
	2.7pF (2R7)	J	J	J	S	S	S	T	T	T	A, B, C
	2.8pF (2R8)	J	J	J	S	S	S	T	T	T	A, B, C
	2.9pF (2R9)	J	J	J	S	S	S	T	T	T	A, B, C
	3.0pF (3R0)	J	J	J	S	S	S	T	T	T	A, B, C
	3.1pF (3R1)	J	J	J	S	S	S	T	T	T	A, B, C
	3.2pF (3R2)	J	J	J	S	S	S	T	T	T	A, B, C
	3.3pF (3R3)	J	J	J	S	S	S	T	T	T	A, B, C
	3.4pF (3R4)	J	J	J	S	S	S	T	T	T	A, B, C
	3.5pF (3R5)	J	J	J	S	S	S	T	T	T	A, B, C
	3.6pF (3R6)	J	J	J	S	S	S	T	T	T	A, B, C
	3.7pF (3R7)	J	J	J	S	S	S	T	T	T	A, B, C
	3.8pF (3R8)	J	J	J	S	S	S	T	T	T	A, B, C
	3.9pF (3R9)	J	J	J	S	S	S	T	T	T	A, B, C
	4.0pF (4R0)	J	J	J	S	S	S	T	T	T	A, B, C
	4.1pF (4R1)	J	J	J	S	S	S	T	T	T	A, B, C
	4.2pF (4R2)	J	J	J	S	S	S	T	T	T	A, B, C
	4.3pF (4R3)	J	J	J	S	S	S	T	T	T	A, B, C
	4.4pF (4R4)	J	J	J	S	S	S	T	T	T	A, B, C
	4.5pF (4R5)	J	J	J	S	S	S	T	T	T	A, B, C
	4.6pF (4R6)	J	J	J	S	S	S	T	T	T	A, B, C
	4.7pF (4R7)	J	J	J	S	S	S	T	T	T	A, B, C
	4.8pF (4R8)	J	J	J	S	S	S	T	T	T	A, B, C
	4.9pF (4R9)	J	J	J	S	S	S	T	T	T	A, B, C
	5.0pF (5R0)	J	J	J	S	S	S	T	T	T	A, B, C
	5.1pF (5R1)	J	J	J	S	S	S	T	T	T	B, C, D
	5.2pF (5R2)	J	J	J	S	S	S	T	T	T	B, C, D
	5.3pF (5R3)	J	J	J	S	S	S	T	T	T	B, C, D
	5.4pF (5R4)	J	J	J	S	S	S	T	T	T	B, C, D
	5.5pF (5R5)	J	J	J	S	S	S	T	T	T	B, C, D
	5.6pF (5R6)	J	J	J	S	S	S	T	T	T	B, C, D
	5.7pF (5R7)	J	J	J	S	S	S	T	T	T	B, C, D
	5.8pF (5R8)	J	J	J	S	S	S	T	T	T	B, C, D
	5.9pF (5R9)	J	J	J	S	S	S	T	T	T	B, C, D
	6.0pF (6R0)	J	J	J	S	S	S	T	T	T	B, C, D

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

DIELECTRIC	NP0										
SIZE	0505			0603			0805				Tolerance
RATED VOLTAGE (VDC)	50	100	250	50	100	250	50	100	250	500	
6.1pF (6R1)	J	J	J	S	S	S	T	T	T	T	B, C, D
6.2pF (6R2)	J	J	J	S	S	S	T	T	T	T	B, C, D
6.3pF (6R3)	J	J	J	S	S	S	T	T	T	T	B, C, D
6.4pF (6R4)	J	J	J	S	S	S	T	T	T	T	B, C, D
6.5pF (6R5)	J	J	J	S	S	S	T	T	T	T	B, C, D
6.6pF (6R6)	J	J	J	S	S	S	T	T	T	T	B, C, D
6.7pF (6R7)	J	J	J	S	S	S	T	T	T	T	B, C, D
6.8pF (6R8)	J	J	J	S	S	S	T	T	T	T	B, C, D
6.9pF (6R9)	J	J	J	S	S	S	T	T	T	T	B, C, D
7.0pF (7R0)	J	J	J	S	S	S	T	T	T	T	B, C, D
7.1pF (7R1)	J	J	J	S	S	S	T	T	T	T	B, C, D
7.2pF (7R2)	J	J	J	S	S	S	T	T	T	T	B, C, D
7.3pF (7R3)	J	J	J	S	S	S	T	T	T	T	B, C, D
7.4pF (7R4)	J	J	J	S	S	S	T	T	T	T	B, C, D
7.5pF (7R5)	J	J	J	S	S	S	T	T	T	T	B, C, D
7.6pF (7R6)	J	J	J	S	S	S	T	T	T	T	B, C, D
7.7pF (7R7)	J	J	J	S	S	S	T	T	T	T	B, C, D
7.8pF (7R8)	J	J	J	S	S	S	T	T	T	T	B, C, D
7.9pF (7R9)	J	J	J	S	S	S	T	T	T	T	B, C, D
8.0pF (8R0)	J	J	J	S	S	S	T	T	T	T	B, C, D
8.1pF (8R1)	J	J	J	S	S	S	T	T	T	T	B, C, D
8.2pF (8R2)	J	J	J	S	S	S	T	T	T	T	B, C, D
8.3pF (8R3)	J	J	J	S	S	S	T	T	T	T	B, C, D
8.4pF (8R4)	J	J	J	S	S	S	T	T	T	T	B, C, D
8.5pF (8R5)	J	J	J	S	S	S	T	T	T	T	B, C, D
8.6pF (8R6)	J	J	J	S	S	S	T	T	T	T	B, C, D
8.7pF (8R7)	J	J	J	S	S	S	T	T	T	T	B, C, D
8.8pF (8R8)	J	J	J	S	S	S	T	T	T	T	B, C, D
8.9pF (8R9)	J	J	J	S	S	S	T	T	T	T	B, C, D
9.0pF (9R0)	J	J	J	S	S	S	T	T	T	T	B, C, D
9.1pF (9R1)	J	J	J	S	S	S	T	T	T	T	B, C, D
9.2pF (9R2)	J	J	J	S	S	S	T	T	T	T	B, C, D
9.3pF (9R3)	J	J	J	S	S	S	T	T	T	T	B, C, D
9.4pF (9R4)	J	J	J	S	S	S	T	T	T	T	B, C, D
9.5pF (9R5)	J	J	J	S	S	S	T	T	T	T	B, C, D
9.6pF (9R6)	J	J	J	S	S	S	T	T	T	T	B, C, D
9.7pF (9R7)	J	J	J	S	S	S	T	T	T	T	B, C, D
9.8pF (9R8)	J	J	J	S	S	S	T	T	T	T	B, C, D
9.9pF (9R9)	J	J	J	S	S	S	T	T	T	T	B, C, D
10pF (100)	J	J	J	S	S	S	T	T	T	T	F, G, J
11pF (110)	J	J	J	S	S	S	T	T	T	T	F, G, J
12pF (120)	J	J	J	S	S	S	T	T	T	T	F, G, J
13pF (130)	J	J	J	S	S	S	T	T	T	T	F, G, J
15pF (150)	J	J	J	S	S	S	T	T	T	T	F, G, J
16pF (160)	J	J	J	S	S	S	T	T	T	T	F, G, J
18pF (180)	J	J	J	S	S	S	T	T	T	T	F, G, J
20pF (200)	J	J	J	S	S	S	T	T	T	T	F, G, J
22pF (220)	J	J	J	S	S	S	T	T	T	T	F, G, J
24pF (240)	J	J	J	S	S	S	T	T	T	T	F, G, J
27pF (270)	J	J	J	S	S	S	T	T	T	T	F, G, J
30pF (300)	J	J	J	S	S	S	T	T	T	T	F, G, J
33pF (330)	J	J	J	S	S	S	T	T	T	T	F, G, J
36pF (360)	J	J	J	S	S	S	T	T	T	T	F, G, J
39pF (390)	J	J	J	S	S	S	T	T	T	T	F, G, J
43pF (430)	J	J	J	S	S	S	T	T	T	T	F, G, J
47pF (470)	J	J	J	S	S	S	T	T	T	T	F, G, J
56pF (560)	J	J	J	S	S	S	T	T	T	T	F, G, J
68pF (680)	J	J	J	S	S	S	T	T	T	T	F, G, J
82pF (820)	J	J	J	S	S	S	T	T	T	T	F, G, J
100pF (101)	J	J	J	S	S	S	T	T	T	T	F, G, J
120pF (121)				S			T	T	T		F, G, J
150pF (151)				S			T	T	T		F, G, J
180pF (181)				S			T	T	T		F, G, J
220pF (221)				S			T	T	T		F, G, J

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

DIELECTRIC	NP0						Tolerance	
SIZE	1111							
RATED VOLTAGE (VDC)	50	100	200	250	500	1500		
Capacitance	1.0pF (1R0)	G	G	G	G	G	A, B, C	
	1.1pF (1R1)	G	G	G	G	G	A, B, C	
	1.2pF (1R2)	G	G	G	G	G	A, B, C	
	1.3pF (1R3)	G	G	G	G	G	A, B, C	
	1.5pF (1R5)	G	G	G	G	G	A, B, C	
	1.6pF (1R6)	G	G	G	G	G	A, B, C	
	1.8pF (1R8)	G	G	G	G	G	A, B, C	
	2.0pF (2R0)	G	G	G	G	G	A, B, C	
	2.2pF (2R2)	G	G	G	G	G	A, B, C	
	2.4pF (2R4)	G	G	G	G	G	A, B, C	
	2.7pF (2R7)	G	G	G	G	G	A, B, C	
	3.0pF (3R0)	G	G	G	G	G	A, B, C	
	3.3pF (3R3)	G	G	G	G	G	A, B, C	
	3.6pF (3R6)	G	G	G	G	G	A, B, C	
	3.9pF (3R9)	G	G	G	G	G	A, B, C	
	4.0pF (4R0)	G	G	G	G	G	A, B, C	
	4.3pF (4R3)	G	G	G	G	G	A, B, C	
	5.0pF (5R0)	G	G	G	G	G	A, B, C	
	5.1pF (5R1)	G	G	G	G	G	B, C, D	
	5.6pF (5R6)	G	G	G	G	G	B, C, D	
	6.0pF (6R0)	G	G	G	G	G	B, C, D	
	6.8pF (6R8)	G	G	G	G	G	B, C, D	
	7.0pF (7R0)	G	G	G	G	G	B, C, D	
	8.0pF (8R0)	G	G	G	G	G	B, C, D	
	8.2pF (8R2)	G	G	G	G	G	B, C, D	
	10pF (100)	G	G	G	G	G	F, G, J	
	12pF (120)	G	G	G	G	G	F, G, J	
	15pF (150)	G	G	G	G	G	F, G, J	
	18pF (180)	G	G	G	G	G	F, G, J	
	22pF (220)	G	G	G	G	G	F, G, J	
	27pF (270)	G	G	G	G	G	F, G, J	
	33pF (330)	G	G	G	G	G	F, G, J	
	39pF (390)	G	G	G	G	G	F, G, J	
	47pF (470)	G	G	G	G	G	F, G, J	
	56pF (560)	G	G	G	G	G	F, G, J	
	68pF (680)	G	G	G	G	G	F, G, J	
	82pF (820)	G	G	G	G	G	F, G, J	
	100pF (101)	G	G	G	G	G	F, G, J	
	120pF (121)	G	G	G	G	G	F, G, J	
	150pF (151)	G	G	G	G	G	F, G, J	
	180pF (181)	G	G	G	G	G	F, G, J	
	220pF (221)	G	G	G	G	G	F, G, J	
	270pF (271)	G	G	G	G	G	F, G, J	
	330pF (331)	G	G	G	G	G	F, G, J	
	390pF (391)	G	G	G	G	G	F, G, J	
	470pF (471)	G	G	G	G	G	F, G, J	
	560pF (561)	G	G	G	G	G	F, G, J	
	680pF (681)	G	G	G	G	G	F, G, J	
	820pF (821)	G	G	G	G	G	F, G, J	
	1000pF (102)	G	G	G	G	G	F, G, J	

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

**CAPACITANCE RANGE (X8G)**

DIELECTRIC	X8G		Tolerance	
SIZE	0805			
RATED VOLTAGE (VDC)	250	500		
0.2pF (0R2)	A	A	A, B	
0.3pF (0R3)	T	T		
0.4pF (0R4)	T	T		
0.5pF (0R5)	T	T		
0.6pF (0R6)	T	T		
0.7pF (0R7)	T	T		
0.8pF (0R8)	T	T		
0.9pF (0R9)	T	T		
1.0pF (1R0)	T	T		
1.1pF (1R1)	T	T		
1.2pF (1R2)	T	T		
1.3pF (1R3)	T	T		
1.4pF (1R4)	T	T		
1.5pF (1R5)	T	T		
1.6pF (1R6)	T	T		
1.7pF (1R7)	T	T		
1.8pF (1R8)	T	T		
1.9pF (1R9)	T	T		
2.0pF (2R0)	T	T		
2.1pF (2R1)	T	T		
2.2pF (2R2)	T	T		
2.3pF (2R3)	T	T		
2.4pF (2R4)	T	T		
2.5pF (2R5)	T	T		
2.6pF (2R6)	T	T		
2.7pF (2R7)	T	T		
2.8pF (2R8)	T	T		
2.9pF (2R9)	T	T		
3.0pF (3R0)	T	T		
3.1pF (3R1)	T	T		
3.2pF (3R2)	T	T		
3.3pF (3R3)	T	T		
3.4pF (3R4)	T	T		
3.5pF (3R5)	T	T		
3.6pF (3R6)	T	T		
3.7pF (3R7)	T	T		
3.8pF (3R8)	T	T		
3.9pF (3R9)	T	T		
4.0pF (4R0)	T	T		
4.1pF (4R1)	T	T		
4.2pF (4R2)	T	T		
4.3pF (4R3)	T	T		
4.4pF (4R4)	T	T		
4.5pF (4R5)	T	T		
4.6pF (4R6)	T	T		
4.7pF (4R7)	T	T		
4.8pF (4R8)	T	T		
4.9pF (4R9)	T	T		
5.0pF (5R0)	T	T		
5.1pF (5R1)	T	T	B, C, D	
5.2pF (5R2)	T	T	B, C, D	
5.3pF (5R3)	T	T	B, C, D	
5.4pF (5R4)	T	T	B, C, D	
5.5pF (5R5)	T	T	B, C, D	
5.6pF (5R6)	T	T	B, C, D	
5.7pF (5R7)	T	T	B, C, D	
5.8pF (5R8)	T	T	B, C, D	
5.9pF (5R9)	T	T	B, C, D	
6.0pF (6R0)	T	T	B, C, D	




DIELECTRIC	X8G		Tolerance	
SIZE	0805			
RATED VOLTAGE (VDC)	250	500		
6.1pF (6R1)	T	T	B, C, D	
6.2pF (6R2)	T	T		
6.3pF (6R3)	T	T		
6.4pF (6R4)	T	T		
6.5pF (6R5)	T	T		
6.6pF (6R6)	T	T		
6.7pF (6R7)	T	T		
6.8pF (6R8)	T	T		
6.9pF (6R9)	T	T		
7.0pF (7R0)	T	T		
7.1pF (7R1)	T	T		
7.2pF (7R2)	T	T		
7.3pF (7R3)	T	T		
7.4pF (7R4)	T	T		
7.5pF (7R5)	T	T		
7.6pF (7R6)	T	T		
7.7pF (7R7)	T	T		
7.8pF (7R8)	T	T		
7.9pF (7R9)	T	T		
8.0pF (8R0)	T	T		
8.1pF (8R1)	T	T		
8.2pF (8R2)	T	T		
8.3pF (8R3)	T	T		
8.4pF (8R4)	T	T		
8.5pF (8R5)	T	T		
8.6pF (8R6)	T	T		
8.7pF (8R7)	T	T		
8.8pF (8R8)	T	T		
8.9pF (8R9)	T	T		
9.0pF (9R0)	T	T		
9.1pF (9R1)	T	T		
9.2pF (9R2)	T	T		
9.3pF (9R3)	T	T		
9.4pF (9R4)	T	T		
9.5pF (9R5)	T	T		
9.6pF (9R6)	T	T		
9.7pF (9R7)	T	T		
9.8pF (9R8)	T	T		
9.9pF (9R9)	T	T		
10pF (100)	T	T	F, G, J	
11pF (110)	T	T	F, G, J	
12pF (120)	T	T	F, G, J	
13pF (130)	T	T	F, G, J	
15pF (150)	T	T	F, G, J	
16pF (160)	T	T	F, G, J	
18pF (180)	T	T	F, G, J	
20pF (200)	T	T	F, G, J	
22pF (220)	T	T	F, G, J	
24pF (240)	T		F, G, J	
27pF (270)	T		F, G, J	
30pF (300)	T		F, G, J	
33pF (330)	T		F, G, J	
36pF (360)	T		F, G, J	
39pF (390)	T		F, G, J	
43pF (430)	T		F, G, J	
47pF (470)	T		F, G, J	
56pF (560)	T		F, G, J	
68pF (680)	T		F, G, J	
82pF (820)	T		F, G, J	

- The letter in cell is expressed the symbol of product thickness.
- For more information about products with special capacitance or other data, please contact WTC local representative.

Multilayer Ceramic Capacitors

## 9. ELECTRICAL CHARACTERISTICS

Please refer ECD on website (by items) for detail ELECTRICAL CHARACTERISTICS:  
<http://www.passivecomponent.com/product-search/mlcc/>

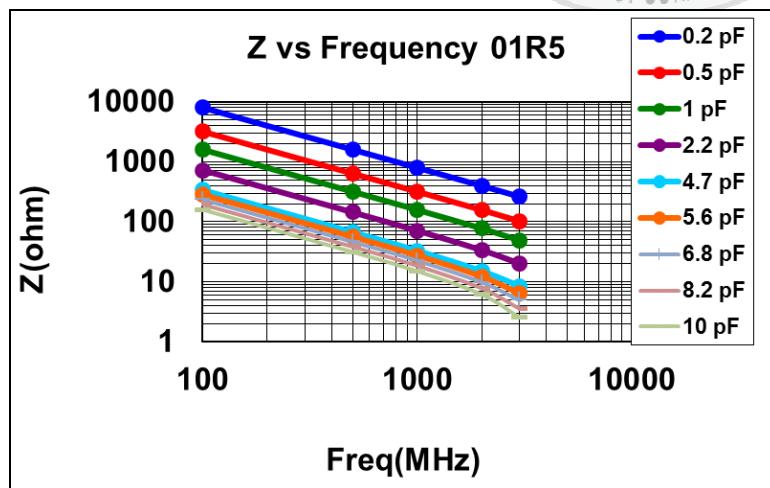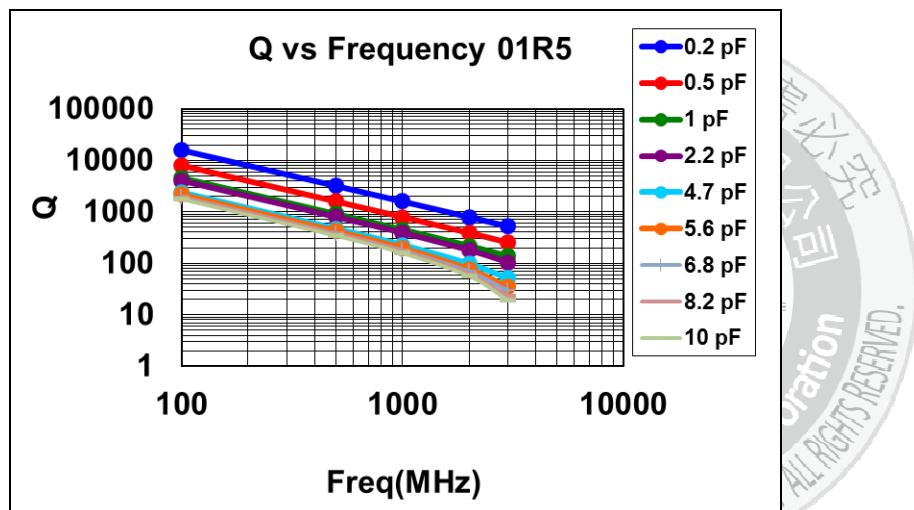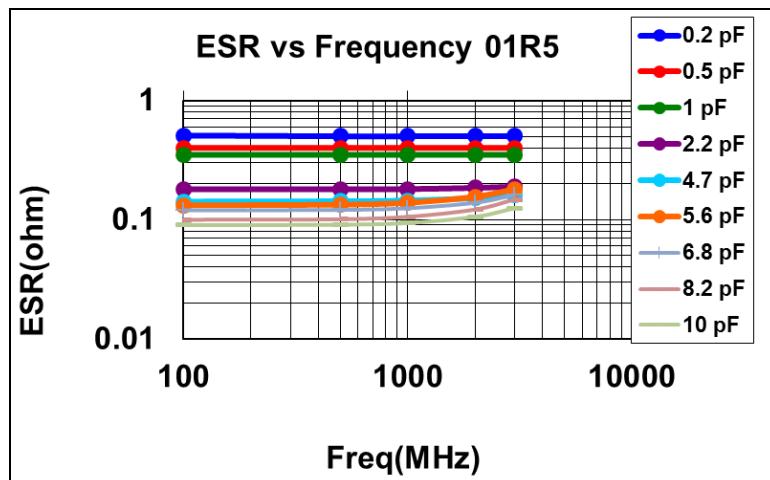

Multilayer Ceramic Capacitors

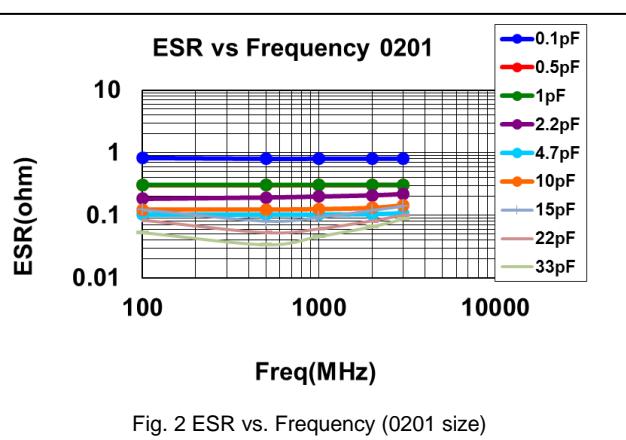


Fig. 2 ESR vs. Frequency (0201 size)

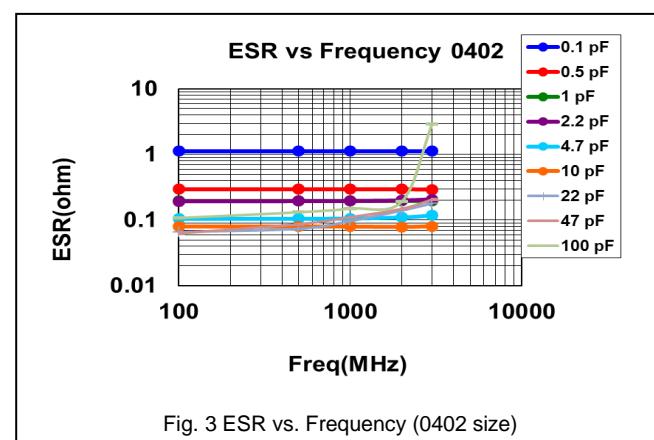


Fig. 3 ESR vs. Frequency (0402 size)

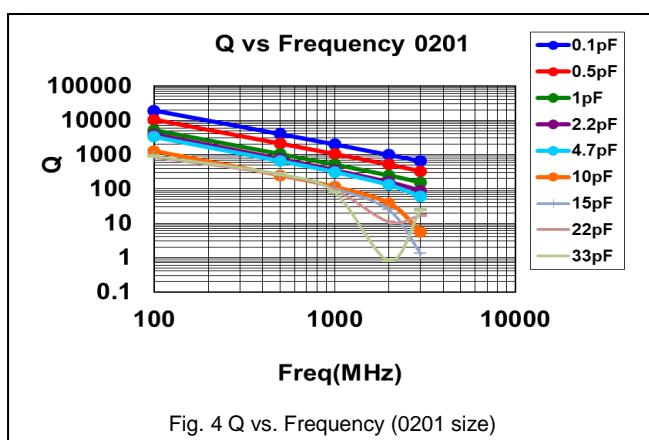


Fig. 4 Q vs. Frequency (0201 size)

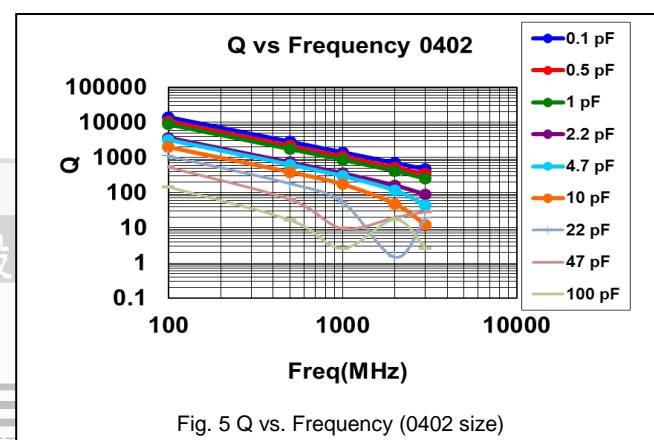


Fig. 5 Q vs. Frequency (0402 size)

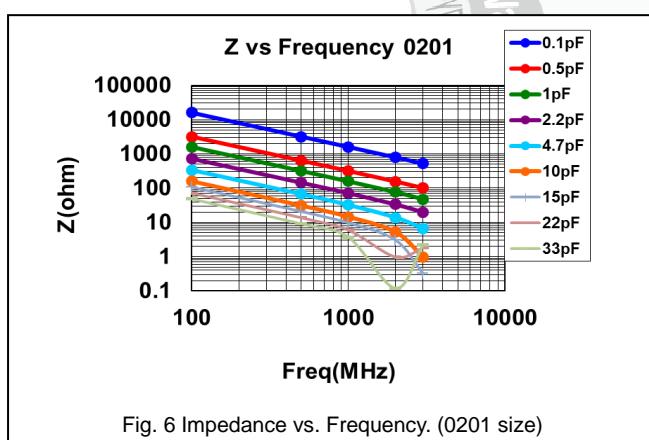


Fig. 6 Impedance vs. Frequency. (0201 size)

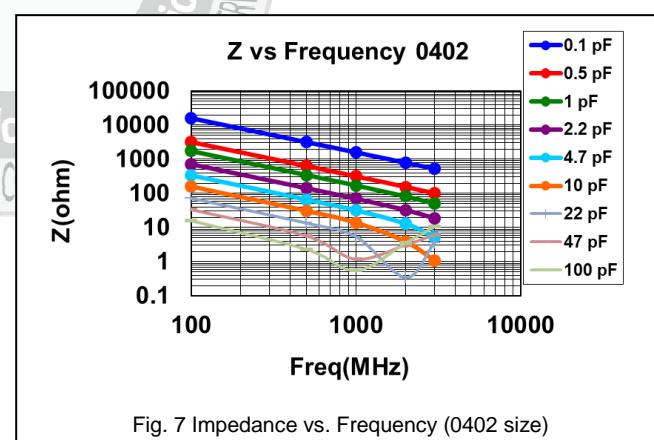


Fig. 7 Impedance vs. Frequency (0402 size)

Multilayer Ceramic Capacitors

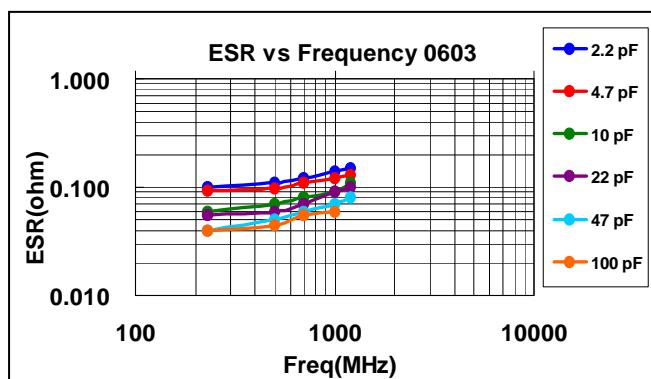


Fig. 8 ESR vs. Frequency (0603 size)

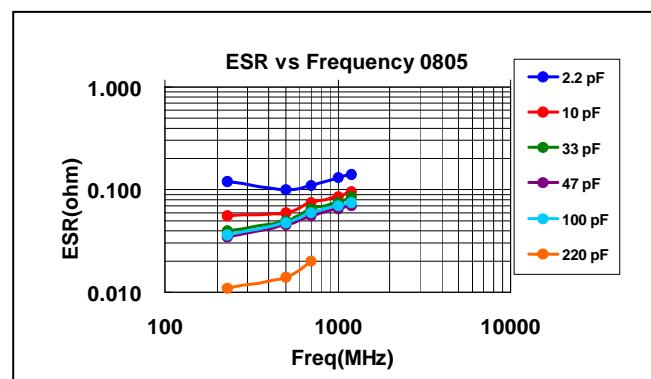


Fig. 9 ESR vs. Frequency (0805 size)

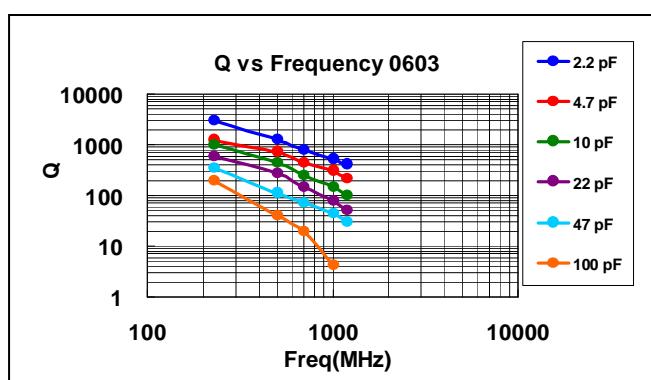


Fig. 10 Q vs. Frequency (0603 size)

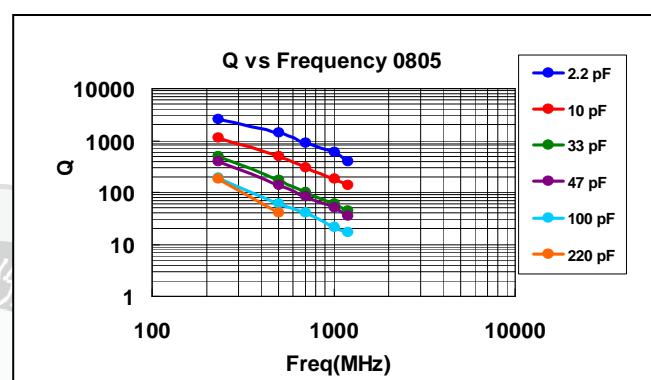


Fig. 11 Q vs. Frequency (0805 size)

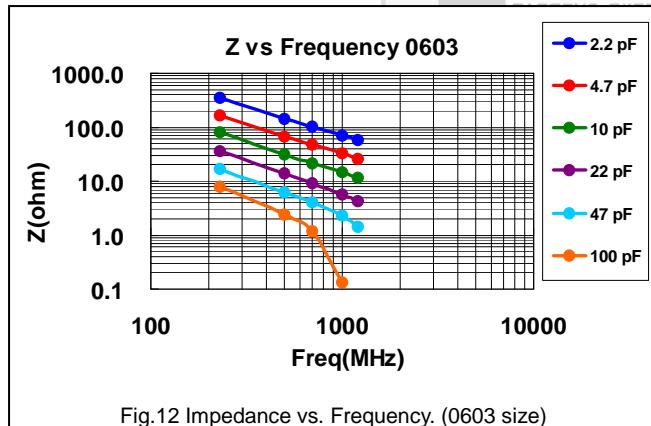


Fig. 12 Impedance vs. Frequency (0603 size)








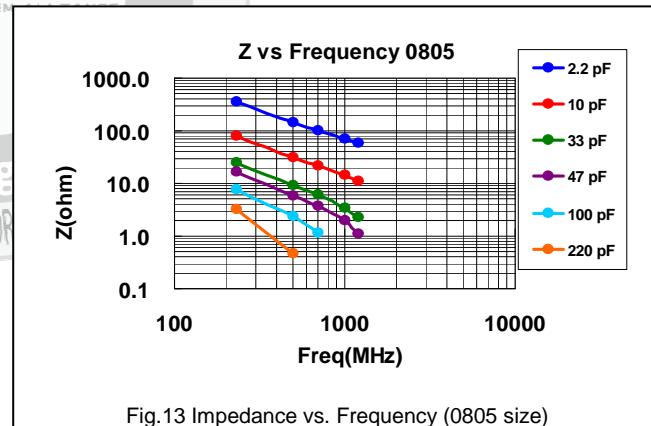


Fig. 13 Impedance vs. Frequency (0805 size)

Multilayer Ceramic Capacitors

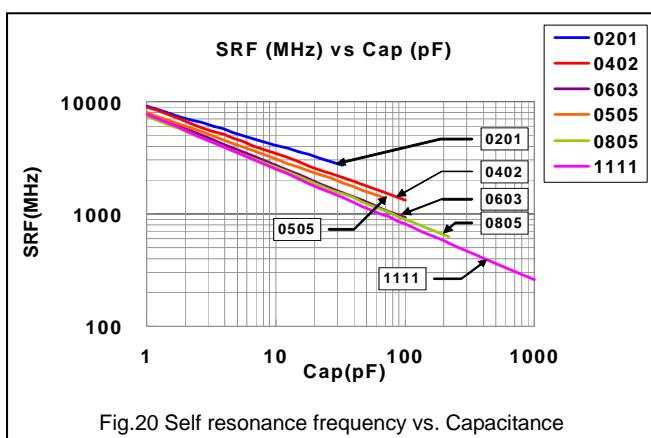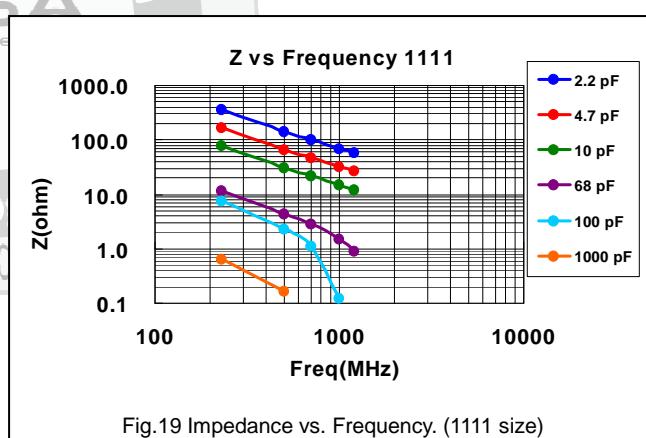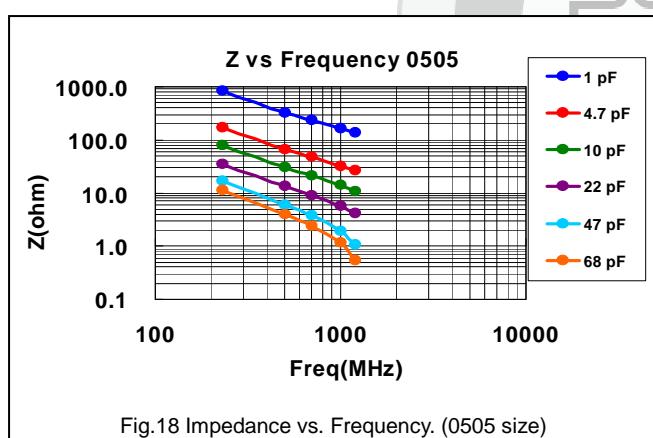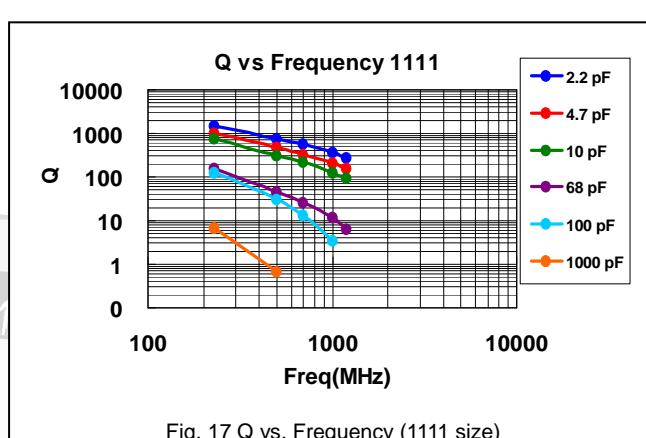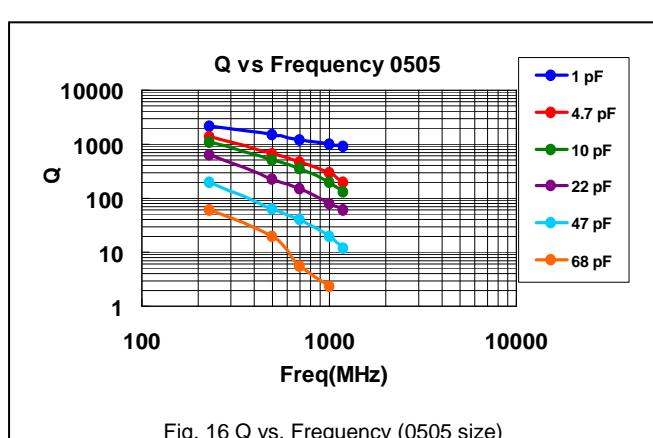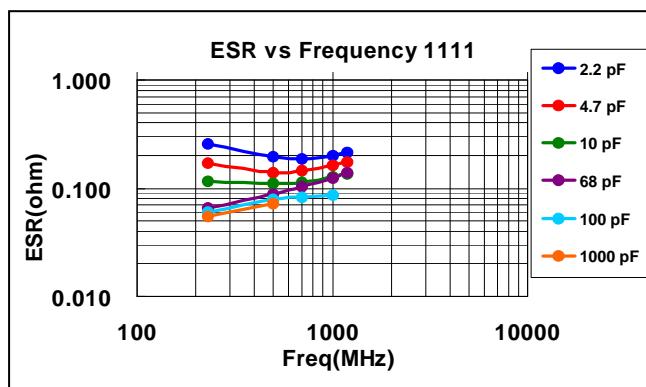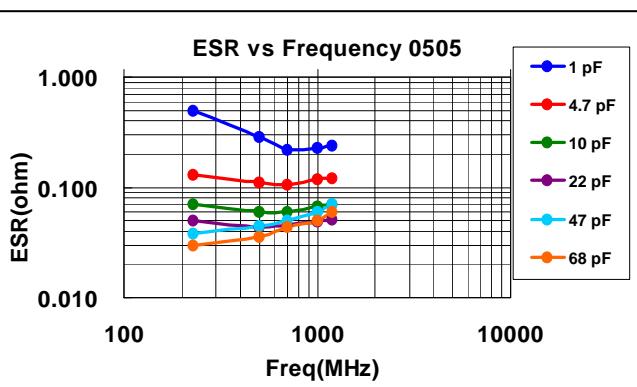

Multilayer Ceramic Capacitors

## 10. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Conditions	Requirements
1.	Visual and Mechanical		* No remarkable defect. * Dimensions to conform to individual specification sheet.
2.	Capacitance	* $1.0 \pm 0.2 \text{VRms}$ , $1\text{MHz} \pm 10\%$	* Shall not exceed the limits given in the detailed spec.
3.	Q/D.F. (Dissipation Factor)	* Test temp.: Room Temperature.  Cap<30pF, Q≥400+20C; Cap≥30pF, Q≥1000 Cap<30pF: Q≥800+20C; Cap≥30pF: Q≥1400	* 01005, 0201, 0402/25V~50V: * 0402/100V~200V, 0603, 0805, 0505, 1111: * 0402/100V~200V, 0603, 0805, 0505, 1111: Cap<30pF: Q≥800+20C; Cap≥30pF: Q≥1400
4.	Dielectric Strength	* To apply voltage: ≤100V : 250% of rated voltage. 200V ~ 300V : 200% of rated voltage. 500V ~ 999V : 150% of rated voltage. 1000V ~ 3000V : 120% of rated voltage. 4000V : 110% of rated voltage.  * Duration: 1 to 5 sec.  * Charge & discharge current less than 50mA.	* No evidence of damage or flash over during test.
5.	Insulation Resistance	* Test temp.: Room Temperature. ≤100V : To apply rated voltage for max. 120 sec. ≥200V : To apply rated voltage (500V max.) for 60 sec.	≥10GΩ or $R_x C \geq 100\Omega \cdot F$ whichever is smaller
6.	Temperature Coefficient	* With no electrical load.  * Operating temperature: NP0: -55~125°C at 25°C X8G: -55~150°C at 25°C	* Capacitance change: within ±30ppm/°C;
7.	Adhesive Strength of Termination	* Pressurizing force : 01005: 1N 0201: 2N 0402 to 0603: 5N >0603: 10N  Test time: $10 \pm 1$ sec.	* No remarkable damage or removal of the terminations.
8.	Vibration Resistance	* Vibration frequency: 10~55 Hz/min. * Total amplitude: 1.5mm * Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.)  * Cap./DF(Q) Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. Cap change and Q/D.F.: To meet initial spec.
9.	Solderability	* Solder temperature: $235 \pm 5^\circ\text{C}$ * Dipping time: $2 \pm 0.5$ sec.	95% min. coverage of all metallized area.
10.	Bending Test	* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm and then the pressure shall be maintained for $5 \pm 1$ sec.  * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change: within ±5.0% or ±0.5pF whichever is larger. (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)
11.	Resistance to Soldering Heat	* Solder temperature: $260 \pm 5^\circ\text{C}$ * Dipping time: $10 \pm 1$ sec * Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder.  * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. * Cap change: within ±2.5% or ±0.25pF whichever is larger. * Q/D.F., I.R. and dielectric strength: To meet initial requirements. * 25% max. leaching on each edge.

\* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

No.	Item	Test Condition	Requirements																												
12.	Temperature Cycle	<p>* Conduct the five cycles according to the temperatures and time.</p> <table border="1"> <thead> <tr> <th>Step</th><th>Temp. (°C)</th><th>Time (min.)</th></tr> </thead> <tbody> <tr> <td>1</td><td>Min. operating temp. +0/-3</td><td>30±3</td></tr> <tr> <td>2</td><td>Room temp.</td><td>2~3</td></tr> <tr> <td>3</td><td>Max. operating temp. +3/-0</td><td>30±3</td></tr> <tr> <td>4</td><td>Room temp.</td><td>2~3</td></tr> </tbody> </table> <p>* Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.</p>	Step	Temp. (°C)	Time (min.)	1	Min. operating temp. +0/-3	30±3	2	Room temp.	2~3	3	Max. operating temp. +3/-0	30±3	4	Room temp.	2~3	<p>No remarkable damage.</p> <p>Cap change : within ±2.5% or ±0.25pF whichever is larger.</p> <p>* Q/D.F., I.R. and dielectric strength: To meet initial requirements.</p>													
Step	Temp. (°C)	Time (min.)																													
1	Min. operating temp. +0/-3	30±3																													
2	Room temp.	2~3																													
3	Max. operating temp. +3/-0	30±3																													
4	Room temp.	2~3																													
13.	Humidity (Damp Heat) Steady State	<p>* Test temp.: 40±2°C</p> <p>* Humidity: 90~95% RH</p> <p>* Test time: 500+24/-0 hrs.</p> <p>* Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.</p>	<p>* No remarkable damage.</p> <p>* Cap change: within ±5.0% or ±0.5pF whichever is larger.</p> <p>* Q/D.F. value: Cap≥30pF, Q≥350;  <math>10\text{pF} \leq \text{Cap} &lt; 30\text{pF}, Q \geq 275 + 2.5C</math>  <math>\text{Cap} &lt; 10\text{pF}, Q \geq 200 + 10C</math></p> <p>* I.R.: <math>\geq 1\text{G}\Omega</math>.</p>																												
14.	Humidity (Damp Heat) Load	<p>* Test temp.: 40±2°C</p> <p>* Humidity: 90~95%RH</p> <p>* Test time: 500+24/-0 hrs.</p> <p>* To apply voltage : rated voltage (MAX. 500V)</p> <p>* Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.</p>	<p>* No remarkable damage.</p> <p>* Cap change: within ±7.5% or ±0.75pF whichever is larger.</p> <p>* Q/D.F. value: Cap≥30pF, Q≥200;  <math>\text{Cap} &lt; 30\text{pF}, Q \geq 100 + 10/3C</math></p> <p>* I.R.: <math>\geq 500\text{M}\Omega</math>.</p>																												
15.	High Temperature Load (Endurance)	<p>* Test temp.: NP0: 125±3°C  X8G: 150±3°C</p> <p>* To apply voltage:  (1) <math>10V \leq U_r &lt; 500V</math>: 200% of rated voltage.  (2) <math>\leq 6.3V</math> or 500V: 150% of rated voltage.  (3) <math>U_r \geq 630V</math>: 120% of rated voltage.</p> <p>* Test time: 1000+24/-0 hrs.</p> <p>* Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.</p>	<p>* No remarkable damage.</p> <p>* Cap change: within ±3.0% or ±0.3pF whichever is larger.</p> <p>* Q/D.F. value: Cap≥30pF, Q≥350  <math>10\text{pF} \leq \text{Cap} &lt; 30\text{pF}, Q \geq 275 + 2.5C</math>  <math>\text{Cap} &lt; 10\text{pF}, Q \geq 200 + 10C</math></p> <p>* I.R.: <math>\geq 1\text{G}\Omega</math>.</p>																												
16.	ESR	<p>The ESR should be measured at room temperature and tested at frequency <math>1 \pm 0.1</math> GHz.</p> <p>The ESR should be measured at room temperature and tested at frequency <math>500 \pm 50</math> MHz.</p>	<table border="1"> <tr> <td>01005</td> <td>0505</td> </tr> <tr> <td><math>0.2\text{pF} \leq \text{Cap} \leq 1\text{pF}; &lt; 700\text{m}\Omega/\text{pF}</math></td> <td><math>0.4\text{pF} \leq \text{Cap} &lt; 1.0\text{pF}; &lt; 1500\text{m}\Omega</math></td> </tr> <tr> <td><math>1\text{pF} &lt; \text{Cap} \leq 2\text{pF}; &lt; 600\text{m}\Omega</math></td> <td><math>1.0\text{pF} \leq \text{Cap} &lt; 10\text{pF}; &lt; 250\text{m}\Omega</math></td> </tr> <tr> <td><math>2\text{pF} &lt; \text{Cap} \leq 5\text{pF}; &lt; 500\text{m}\Omega</math></td> <td><math>10\text{pF} \leq \text{Cap} \leq 100\text{pF}; &lt; 200\text{m}\Omega</math></td> </tr> <tr> <td><math>5\text{pF} &lt; \text{Cap} \leq 10\text{pF}; &lt; 300\text{m}\Omega</math></td> <td><math>\text{Cap} &lt; 10\text{pF}, Q \geq 200 + 10C</math></td> </tr> <tr> <td><math>10\text{pF} &lt; \text{Cap} \leq 22\text{pF}; &lt; 350\text{m}\Omega</math></td> <td></td> </tr> </table> <table border="1"> <tr> <td>0201</td> <td>0402</td> </tr> <tr> <td><math>0.1\text{pF} \leq \text{Cap} \leq 1\text{pF}; &lt; 350\text{m}\Omega/\text{pF}</math></td> <td><math>0.1\text{pF} \leq \text{Cap} \leq 1\text{pF}; &lt; 350\text{m}\Omega/\text{pF}</math></td> </tr> <tr> <td><math>1\text{pF} &lt; \text{Cap} \leq 5\text{pF}; &lt; 300\text{m}\Omega</math></td> <td><math>1\text{pF} &lt; \text{Cap} \leq 5\text{pF}; &lt; 300\text{m}\Omega</math></td> </tr> <tr> <td><math>5\text{pF} &lt; \text{Cap} \leq 22\text{pF}; &lt; 250\text{m}\Omega</math></td> <td><math>5\text{pF} &lt; \text{Cap} \leq 100\text{pF}; &lt; 250\text{m}\Omega</math></td> </tr> </table> <table border="1"> <tr> <td>0603</td> <td>0805</td> </tr> <tr> <td><math>0.1\text{pF} \leq \text{Cap} \leq 1\text{pF}; &lt; 1500\text{m}\Omega</math></td> <td><math>0.3\text{pF} \leq \text{Cap} \leq 1\text{pF}; &lt; 1500\text{m}\Omega</math></td> </tr> <tr> <td><math>1\text{pF} &lt; \text{Cap} \leq 10\text{pF}; &lt; 250\text{m}\Omega</math></td> <td><math>1\text{pF} &lt; \text{Cap} \leq 10\text{pF}; &lt; 250\text{m}\Omega</math></td> </tr> <tr> <td><math>10\text{pF} &lt; \text{Cap} \leq 220\text{pF}; &lt; 200\text{m}\Omega</math></td> <td><math>\text{Cap} &gt; 10\text{pF}; &lt; 200\text{m}\Omega</math></td> </tr> </table>	01005	0505	$0.2\text{pF} \leq \text{Cap} \leq 1\text{pF}; < 700\text{m}\Omega/\text{pF}$	$0.4\text{pF} \leq \text{Cap} < 1.0\text{pF}; < 1500\text{m}\Omega$	$1\text{pF} < \text{Cap} \leq 2\text{pF}; < 600\text{m}\Omega$	$1.0\text{pF} \leq \text{Cap} < 10\text{pF}; < 250\text{m}\Omega$	$2\text{pF} < \text{Cap} \leq 5\text{pF}; < 500\text{m}\Omega$	$10\text{pF} \leq \text{Cap} \leq 100\text{pF}; < 200\text{m}\Omega$	$5\text{pF} < \text{Cap} \leq 10\text{pF}; < 300\text{m}\Omega$	$\text{Cap} < 10\text{pF}, Q \geq 200 + 10C$	$10\text{pF} < \text{Cap} \leq 22\text{pF}; < 350\text{m}\Omega$		0201	0402	$0.1\text{pF} \leq \text{Cap} \leq 1\text{pF}; < 350\text{m}\Omega/\text{pF}$	$0.1\text{pF} \leq \text{Cap} \leq 1\text{pF}; < 350\text{m}\Omega/\text{pF}$	$1\text{pF} < \text{Cap} \leq 5\text{pF}; < 300\text{m}\Omega$	$1\text{pF} < \text{Cap} \leq 5\text{pF}; < 300\text{m}\Omega$	$5\text{pF} < \text{Cap} \leq 22\text{pF}; < 250\text{m}\Omega$	$5\text{pF} < \text{Cap} \leq 100\text{pF}; < 250\text{m}\Omega$	0603	0805	$0.1\text{pF} \leq \text{Cap} \leq 1\text{pF}; < 1500\text{m}\Omega$	$0.3\text{pF} \leq \text{Cap} \leq 1\text{pF}; < 1500\text{m}\Omega$	$1\text{pF} < \text{Cap} \leq 10\text{pF}; < 250\text{m}\Omega$	$1\text{pF} < \text{Cap} \leq 10\text{pF}; < 250\text{m}\Omega$	$10\text{pF} < \text{Cap} \leq 220\text{pF}; < 200\text{m}\Omega$	$\text{Cap} > 10\text{pF}; < 200\text{m}\Omega$
01005	0505																														
$0.2\text{pF} \leq \text{Cap} \leq 1\text{pF}; < 700\text{m}\Omega/\text{pF}$	$0.4\text{pF} \leq \text{Cap} < 1.0\text{pF}; < 1500\text{m}\Omega$																														
$1\text{pF} < \text{Cap} \leq 2\text{pF}; < 600\text{m}\Omega$	$1.0\text{pF} \leq \text{Cap} < 10\text{pF}; < 250\text{m}\Omega$																														
$2\text{pF} < \text{Cap} \leq 5\text{pF}; < 500\text{m}\Omega$	$10\text{pF} \leq \text{Cap} \leq 100\text{pF}; < 200\text{m}\Omega$																														
$5\text{pF} < \text{Cap} \leq 10\text{pF}; < 300\text{m}\Omega$	$\text{Cap} < 10\text{pF}, Q \geq 200 + 10C$																														
$10\text{pF} < \text{Cap} \leq 22\text{pF}; < 350\text{m}\Omega$																															
0201	0402																														
$0.1\text{pF} \leq \text{Cap} \leq 1\text{pF}; < 350\text{m}\Omega/\text{pF}$	$0.1\text{pF} \leq \text{Cap} \leq 1\text{pF}; < 350\text{m}\Omega/\text{pF}$																														
$1\text{pF} < \text{Cap} \leq 5\text{pF}; < 300\text{m}\Omega$	$1\text{pF} < \text{Cap} \leq 5\text{pF}; < 300\text{m}\Omega$																														
$5\text{pF} < \text{Cap} \leq 22\text{pF}; < 250\text{m}\Omega$	$5\text{pF} < \text{Cap} \leq 100\text{pF}; < 250\text{m}\Omega$																														
0603	0805																														
$0.1\text{pF} \leq \text{Cap} \leq 1\text{pF}; < 1500\text{m}\Omega$	$0.3\text{pF} \leq \text{Cap} \leq 1\text{pF}; < 1500\text{m}\Omega$																														
$1\text{pF} < \text{Cap} \leq 10\text{pF}; < 250\text{m}\Omega$	$1\text{pF} < \text{Cap} \leq 10\text{pF}; < 250\text{m}\Omega$																														
$10\text{pF} < \text{Cap} \leq 220\text{pF}; < 200\text{m}\Omega$	$\text{Cap} > 10\text{pF}; < 200\text{m}\Omega$																														

\* "Room condition" Temperature: 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.

Multilayer Ceramic Capacitors

## APPENDIXES

### □ Tape & reel dimensions

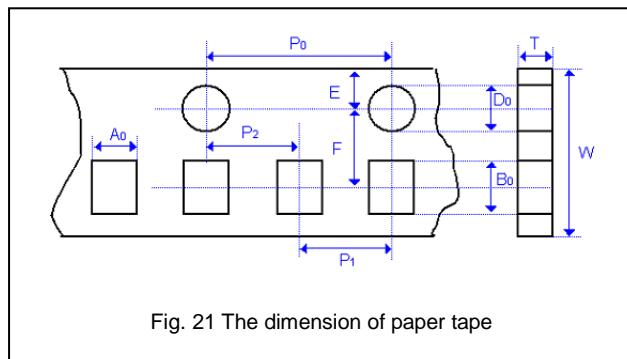


Fig. 21 The dimension of paper tape

Size	01005	0201	0402	0505	0603	0805	1111
Thickness	V	L	N	J	S	T	G
$A_0$	0.25 +/-0.05	0.40 +/-0.10	0.70 +/-0.20	< 1.90	1.05 +/-0.30	1.50 +/-0.20	< 3.05
$B_0$	0.45 +/-0.05	0.70 +/-0.10	1.20 +/-0.20	< 1.90	1.80 +/-0.30	2.30 +/-0.20	< 3.80
$T$	$\leq 0.50$	$\leq 0.55$	$\leq 0.80$	$0.23+/-0.1$	$\leq 1.20$	$\leq 1.20$	$0.23+/-0.1$
$K_0$	-	-	-	< 1.50	-	-	< 2.50
$W$	8.00 +/-0.30						
$P_0$	4.00 +/-0.10						
$10 \times P_0$	40.00 +/-0.10	40.00 +/-0.10	40.00 +/-0.10	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20	40.00 +/-0.20
$P_1$	2.00 +/-0.05	2.00 +/-0.05	2.00 +/-0.05	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10	4.00 +/-0.10
$P_2$	2.00 +/-0.05						
$D_0$	1.50 +0.1/-0						
$D_1$	-	-	-	1.00 +/-0.10	-	-	1.00 +/-0.10
$E$	1.75 +/-0.10						
$F$	3.50 +/-0.05						

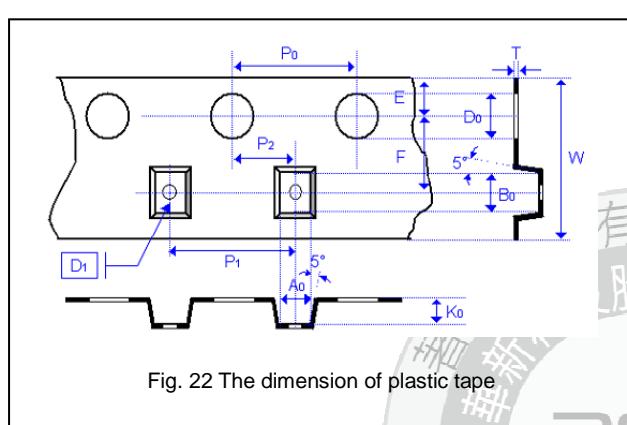


Fig. 22 The dimension of plastic tape


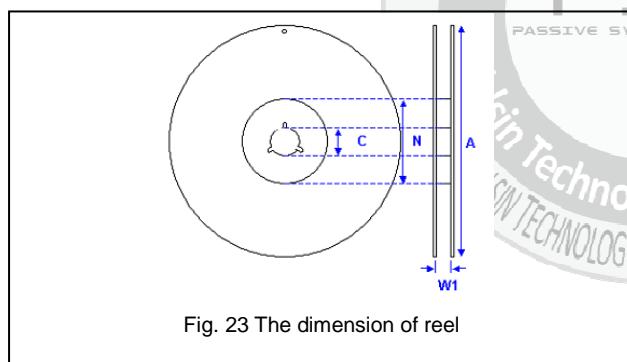


Fig. 23 The dimension of reel

Size	01005, 0201, 0402, 0505, 0603, 0805, 1111
Reel size	7"      13"
C	13.0±0.5
W <sub>1</sub>	10.0±1.5
A	178.0±2.0
N	60.0+1.0/-0
	50 min

### □ Example of customer label

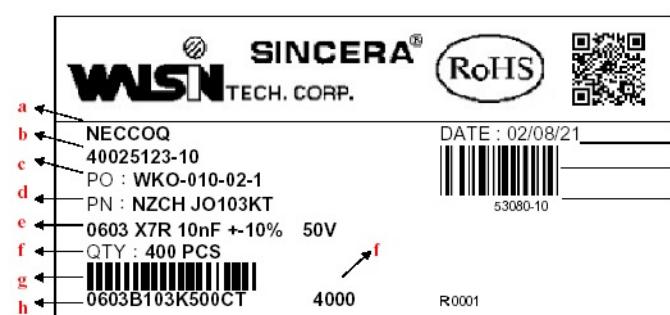

\*Customized label is available upon request

- a. Customer name
- b. WTC order series and item number
- c. Customer P/O
- d. Customer P/N
- e. Description of product
- f. Quantity
- g. Bar code including quantity & WTC P/N or customer
- h. WTC P/N
- i. Shipping date
- j. Order bar code including series and item numbers
- k. Serial number of label

## Multilayer Ceramic Capacitors

### Constructions

No.	Name	X8G, NP0
①	Ceramic material	Hi-Q dielectric ceramic
②	Inner electrode	Cu
③	Termination	Inner layer
④		Middle layer
⑤		Outer layer
		Sn (Matt)

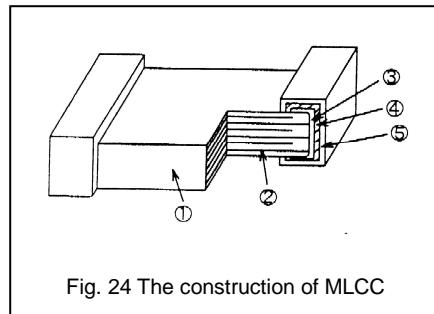


Fig. 24 The construction of MLCC

### Storage and handling conditions

- (1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions; MSL Level 1.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

#### Cautions:

- a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

### Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N<sub>2</sub> within oven are recommended.

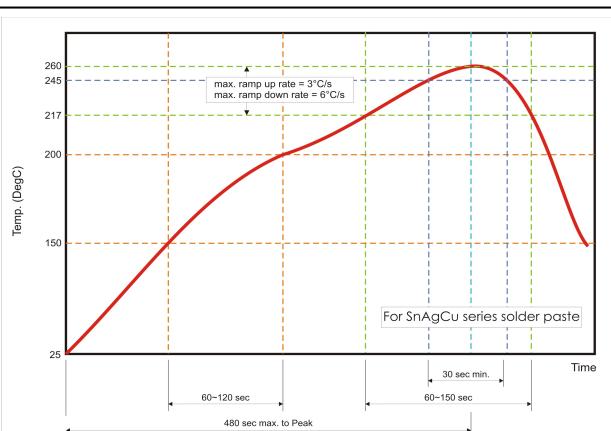


Fig. 25 Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

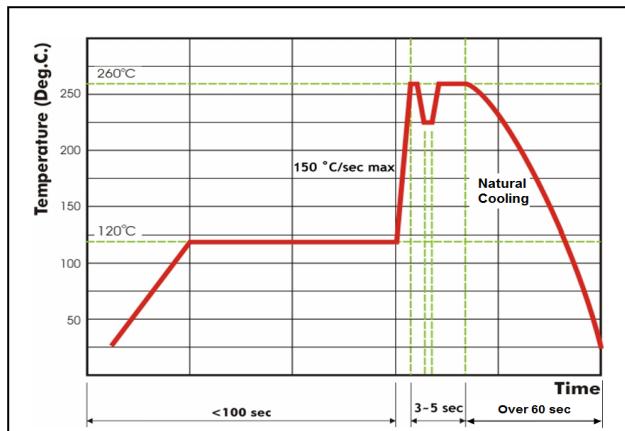


Fig. 26 Recommended wave soldering profile for SMT process with SnAgCu series solder.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Walsin Technology\(华新科技\)](#)