


I-T Characteristics / 時間-電流特性

Ampere Rating 額定電流	% of Ampere Rating 額定電流%	Opening Time 熔斷時間
160mA-6.3A	100%	4 Hrs Min. / 最長4小時
	200%	5s Max. / 最長5秒
	275%	300ms Max. / 最長300毫秒
	400%	30ms Max. / 最長30毫秒
	1000%	4ms Max. / 最長4毫秒


In accordance with IEC60127- 3 standard, sheet2 / 遵循 IEC60127-3, 規格單2

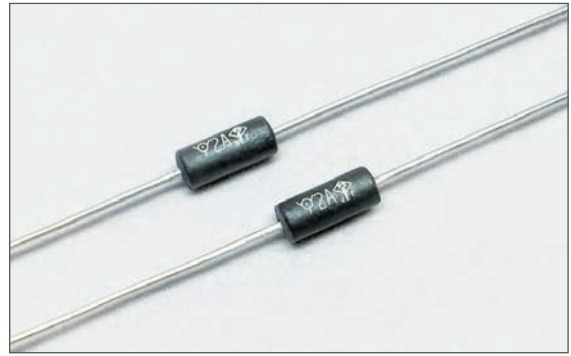

Product Features / 產品特性

Materials 材質	Body / 本體: Plastic / 塑料 Lead / 引線: Tinned copper wire / 鍍錫銅線 Cap / 銅帽: Brass with nickel plated / 銅鍍鎳 Element / 熔絲: Alloy / 合金線
Operating Temperature 操作溫度	-55°C to +125°C (Consider de-rating / 需考慮溫度折減)
Solderability 可焊性	260°C, ≤ 3s. (Wave / 波峰焊) 350±10°C, ≤ 3s. (Soldering iron / 烙鐵焊)
Resistance to Soldering Heat 耐焊接熱	260°C, 10s. (Wave / 波峰焊) 350°C, 5s. (Soldering iron / 烙鐵焊)
Recommended Soldering Parameters 建議錫焊參數	Wave soldering parameter / 波峰焊 Soldering pot temperature / 錫爐溫度: 260°C Max Solder dwell time / 焊接時間: 2~5s
	Hand welding parameter / 手工焊 Soldering iron temperature / 烙鐵溫度: 350±5°C Solder dwell time / 焊接時間: 5s Max.
Storage Conditions 儲存條件	Can be stored for 3 years under tight seal condition at temperature of +10°C~60°C, relative humidity ≤ 75%. 在溫度+10°C~60°C, 相對濕度 ≤ 75% 的密閉條件下可存放 3 年。 At most can be kept 30 days at temperature +10°C~60°C, relative humidity ≤ 95% under covered conditions. 在溫度+10°C~60°C, 相對濕度為 95% 的非露天最多可存放 30 天。

Dimensions / 尺寸圖 (Unit / 單位:mm)

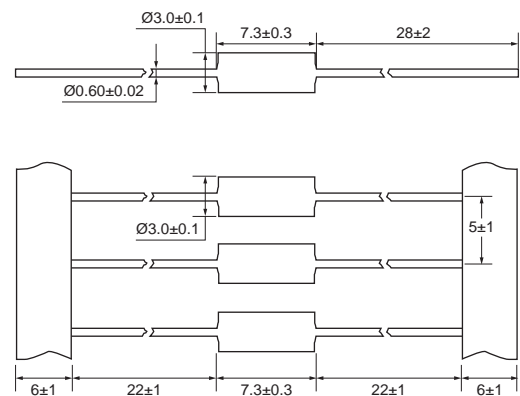

Electrical Characteristics / 電氣特性

Rated Current 額定電流	Rated Voltage 額定電壓	Breaking Capacity 分斷能力	Safety Approvals 安全認證				
			UL US	DVE	VDE	CCC	PS JET
160mA	125V	160mA-5A 50A@125V AC/DC	●	●		●	
200mA	125V		●	●		●	
250mA	125V		●	●		●	
315mA	125V		●	●		●	
400mA	125V		●	●		●	
500mA	125V		●	●		●	
630mA	125V		●	●		●	
800mA	125V		●	●		●	
1.00A	125V		●	●		●	●
1.25A	125V		●	●		●	●
1.60A	125V		●	●		●	●
2.00A	125V		●	●		●	●
2.50A	125V		●	●		●	●
3.15A	125V		●	●		●	●
4.00A	125V		●	●		●	●
5.00A	125V	●	●		●	●	
6.30A	125V	6.3A 63A@125V AC/DC	●		●	●	

单击下面可查看定价，库存，交付和生命周期等信息

[>>Walter\(华德\)](#)