


I-T Characteristics / 時間-電流特性

Ampere Rating 額定電流	% of Ampere Rating 額定電流%	Opening Time 熔斷時間
40A / 50A	100%	4 Hrs Min. / 最短4小時
	250%	120s Max. / 最長120秒

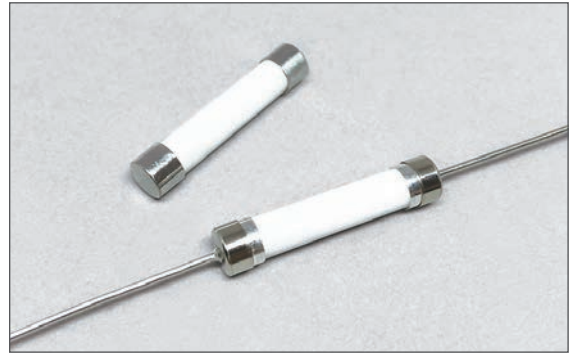


Product Features / 產品特性


<b>Operating Temperature 操作溫度</b>	<p>Operating temperature / 操作溫度範圍: -40°C~125°C When choosing the fuses specification, if the operating environmental temperature beyond the scope from 20~30°C, you should consider the environmental temperature's affection to fuses. 若貴司操作環境溫度超出25±5°C範圍, 在選用保險絲規格時, 需考慮操作環境溫度對保險絲的影響。</p>
<b>Storage Conditions 儲存條件</b>	<p>Under airtight in temperature +10°C~60°C、relative humidity ≤75% can store 3 years. 在溫度+10°C~60°C、相對濕度≤75%的密閉條件下可存放3年。 Without dew in temperature+10°C~60°C、relative humidity be 95% maximum value for 30 days. 在溫度+10°C~60°C、相對濕度為95%的非露天下最多可存放30天。</p>
<b>Installation Way &amp; Parameters 安裝方式及條件</b>	<p>Wave soldering parameters / 波峰焊 Solder pot temperature / 錫爐溫度: 260±3°C Max Solder dwell time / 焊接時間: 10s Max</p>
	<p>Hand welding parameters / 手工焊 Solder iron temperature / 烙鐵溫度: 350±5°C Heating time / 焊接時間: 5s Max</p>

Dimensions / 尺寸圖 (Unit / 單位:mm)


WM55-XXX



WM55-XXX-P



WM55-XXX-P-L



Electrical Characteristics / 電氣特性

Type 品名	Ordering P / N 料號			Rated Current 額定電流	Breaking Capacity 分斷能力	Safety Approvals 安全認證
WM55	WM50-XXX	WM55-XXX-P	WM55-XXX-P-L			
	WM55-40	WM55-40-P	WM55-40-P-L	40A	250VAC / 1000A	
	WM55-50	WM55-50-P	WM55-50-P-L	50A	150VDC / 1000A	

单击下面可查看定价，库存，交付和生命周期等信息

[>>Walter\(华德\)](#)