


I-T Characteristics / 時間-電流特性

Ampere Rating 額定電流	% of Ampere Rating 額定電流%	Opening Time 熔斷時間
15A~30A	200%	5 min Max. / 最長5分鐘
	300%	10s Max. / 最長10秒

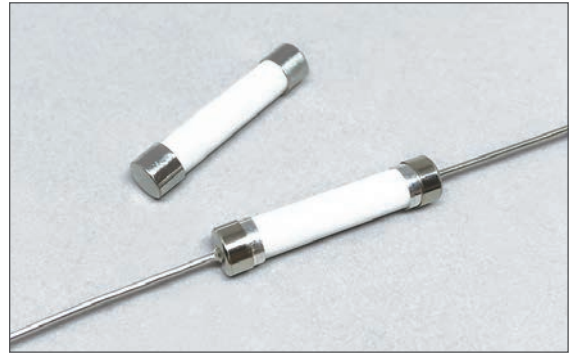


Product Features / 產品特性


Operating Temperature 操作溫度	<p>Operating temperature / 操作溫度範圍: -55°C~125°C</p> <p>When choosing the fuses specification, if the operating environmental temperature beyond the scope from 20~30°C, you should consider the environmental temperature's affection to fuses.</p> <p>若貴司操作環境溫度超出25±5°C範圍，在選用保險絲規格時，需考慮操作環境溫度對保險絲的影響。</p>
Storage Conditions 儲存條件	<p>Under airtight in temperature +10°C~60°C、relative humidity ≤75% can store 3 years.</p> <p>在溫度+10°C~60°C、相對濕度≤75%的密閉條件下可存放3年。</p> <p>Without dew in temperature+10°C~60°C、relative humidity be 95% maximum value for 30 days.</p> <p>在溫度+10°C~60°C、相對濕度為95%的非露天下最多可存放30天。</p>
Installation Way & Parameters 安裝方式及條件	<p>Wave soldering parameters / 波峰焊</p> <p>Solder pot temperature / 錫爐溫度: 260±3°C Max</p> <p>Solder dwell time / 焊接時間: 10s Max</p>
	<p>Hand welding parameters / 手工焊</p> <p>Solder iron temperature / 烙鐵溫度: 350±5°C</p> <p>Heating time / 焊接時間: 5s Max</p>

Dimensions / 尺寸圖 (Unit / 單位:mm)


WM40-XXX




WM40-XXX-P



WM40-XXX-P-L



WM40-XXX-P-SXL



Electrical Characteristics / 電氣特性

Type 品名	Ordering P / N 料號		Rated Current 額定電流	Breaking Capacity 分斷能力	Safety Approvals 安全認證
WM40	WM40-XXX	WM40-XXX-P (-P-L / -P-SXL)			
	WM40-15	WM40-15-P (-P-L / -P-SXL)	15A	660VAC / 1000A 660VDC / 1000A	●
	WM40-16	WM40-16-P (-P-L / -P-SXL)	16A		●
	WM40-20	WM40-20-P (-P-L / -P-SXL)	20A		●
	WM40-25	WM40-25-P (-P-L / -P-SXL)	25A		●
	WM40-30	WM40-30-P (-P-L / -P-SXL)	30A		●

单击下面可查看定价，库存，交付和生命周期等信息

[>>Walter\(华德\)](#)