




# WS3.3-2R1N

## Transient Voltage Suppressor

### Features

- Transient protection for high-speed data lines
- Small package saves board space
- Low capacitance for high-speed interfaces
- Low leakage current and clamping voltage
- Low operating voltage: 3.3V
- Solid-state silicon-avalanche technology

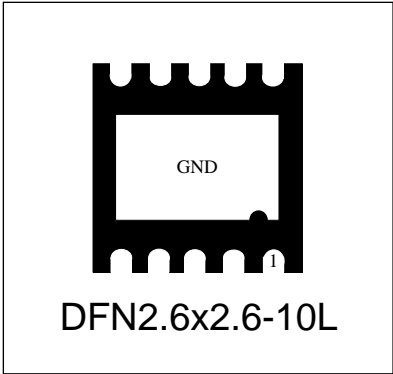

### IEC Compatibility (EN61000-4)

- IEC 61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 80A (8/20µs)


### Mechanical Characteristics

- DFN2.6x2.6-10L package
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
- RoHS Compliant


### Applications

- Integrated Magnetics
- 10/100/1000 Ethernet
- T3/E3 Secondary Protection
- Carrier Class Equipment
- Customer Premise Equipment

### Circuit Diagram

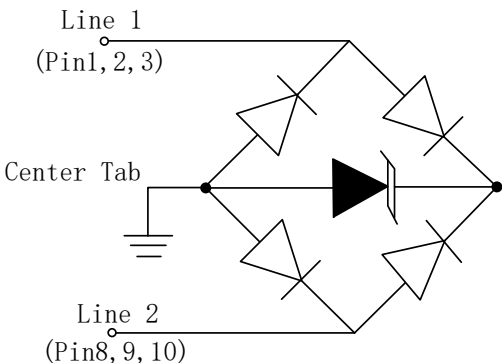

### Package Configuration

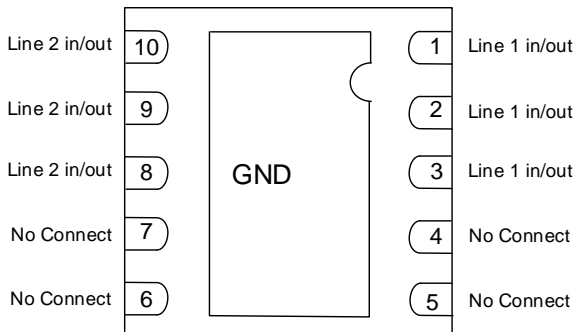


### Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu s$ )	$P_{PP}$	2000	Watts
Peak Pulse Current ( $t_p = 8/20\mu s$ )	$I_{PP}$	80	A
Operating Temperature	$T_J$	-55 to + 125	°C
Storage Temperature	$T_{STG}$	-55 to +150	°C

### Electrical Parameters (T=25°C)

Symbol	Parameter
$I_{PP}$	Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Reverse Stand-Off Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Reverse Breakdown Voltage
$V_{SB}$	Snap-Back Voltage @ $I_{SB}$
$I_{SB}$	Snap-Back Current
$I_T$	Test Current
$V_{PTF}$	Forward Punch-through Breakdown Voltage @ $I_{PTF}$
$I_{PTF}$	Forward Test Current

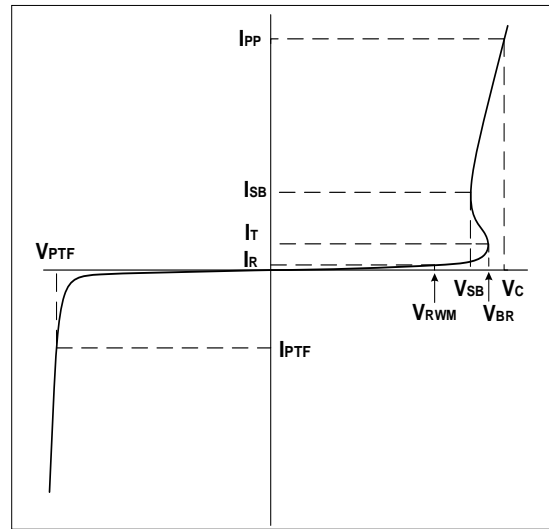

### Electrical Characteristics

WS3.3-2R1N						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	$V_{RWM}$				3.3	V
Reverse Breakdown Voltage	$V_{BR}$	$I_t = 1mA$	3.5			V
Snap-Back Voltage	$V_{SB}$	$I_{SB} = 50mA$	2.8			
Reverse Leakage Current	$I_R$	$V_{RWM} = 3.3V, T = 25^\circ C$			200	nA
Clamping Voltage	$V_C$	$I_{pp} = 80A, t_p = 8/20\mu s$ Line to Ground		17	20	V
Clamping Voltage	$V_C$	$I_{pp} = 80A, t_p = 8/20\mu s$ Line to Line		23	25	V
Dynamic Resistance <sup>1,2</sup>	$R_{DYN}$	TLP=0.2/100ns Line to Ground		0.16		$\Omega$
Junction Capacitance	$C_j$	$V_R = 0V, f = 1MHz$ I/O pin to GND		7.5	10	pF
		$V_R = 0V, f = 1MHz$ Between I/O pins		3.5	5	pF

**Note:** 1、TLP Setting :  $t_p=100ns, t_r=0.2ns, I_{TLP}$  and  $V_{TLP}$  sample window:  $t_1=70ns$  to  $t_2=90ns$ .

2、Dynamic resistance calculated from  $I_{PP}=4A$  to  $I_{PP}=16A$  using "Best Fit"

Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

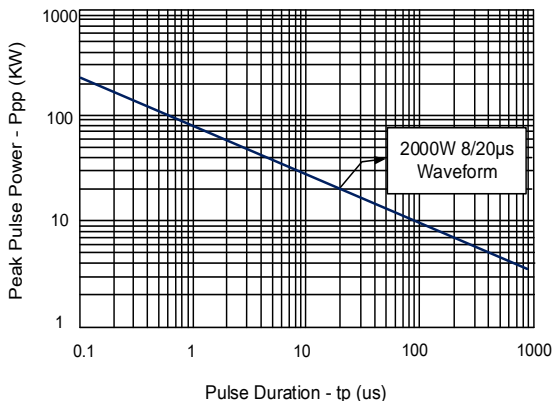


Figure 2: Power Derating Curve

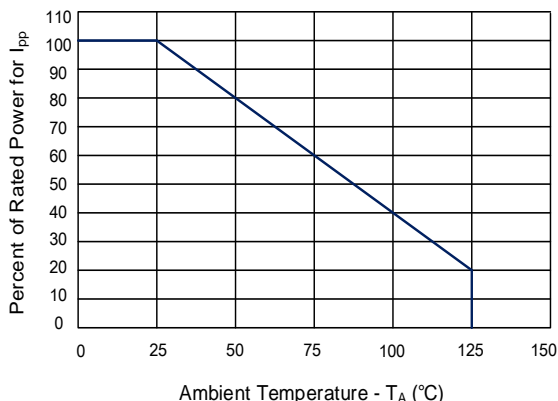


Figure 3: Clamping Voltage vs. Peak Pulse Current

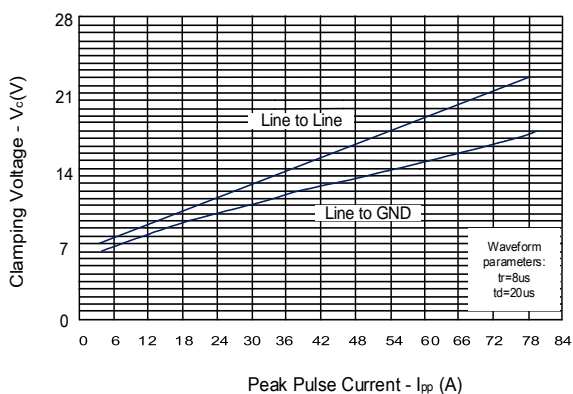


Figure 4: Capacitance vs. Reverse Voltage

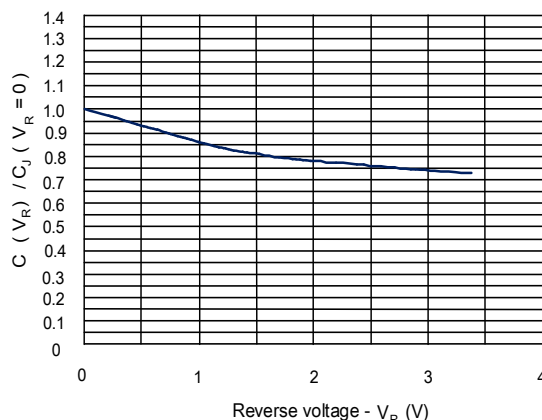


Figure 5: 8/20us Pulse Waveform



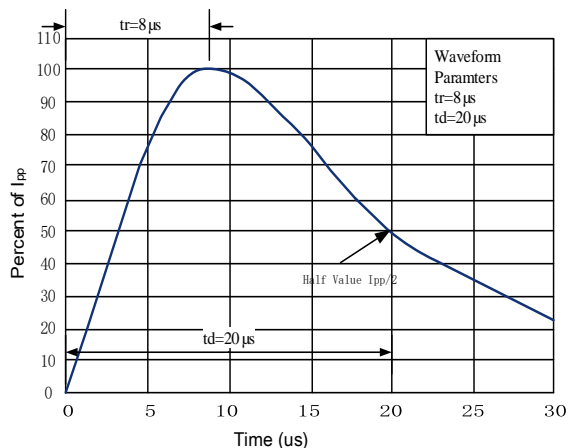


Figure 6: TLP I-V Curve

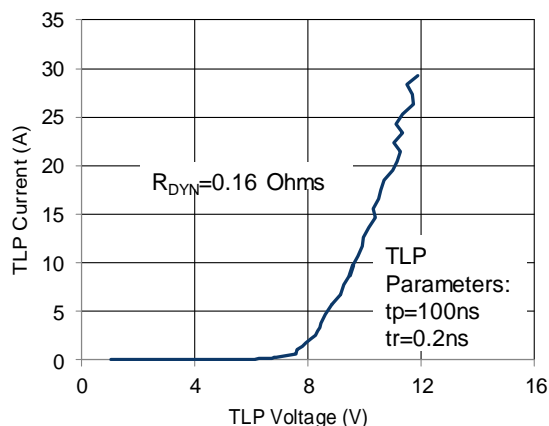

Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	Temperature Min ( $T_{s(min)}$ )	150°C
	Temperature Max ( $T_{s(max)}$ )	200°C
	Time (min to max) ( $t_s$ )	60 – 190 secs
Average ramp up rate (Liquidus Temp) ( $T_L$ ) to peak		5°C/second max
$T_{s(max)}$ to $T_L$ —Ramp-up Rate		5°C/second max
Reflow	Temperature ( $T_L$ ) (Liquidus)	217°C
	Temperature ( $t_L$ )	60 – 150 seconds
Peak Temperature ( $T_P$ )		260+0/-5 °C
Time within actual peak Temperature ( $t_p$ )		20 – 40 seconds
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature ( $T_P$ )		8 minutes Max.
Do not exceed		280°C

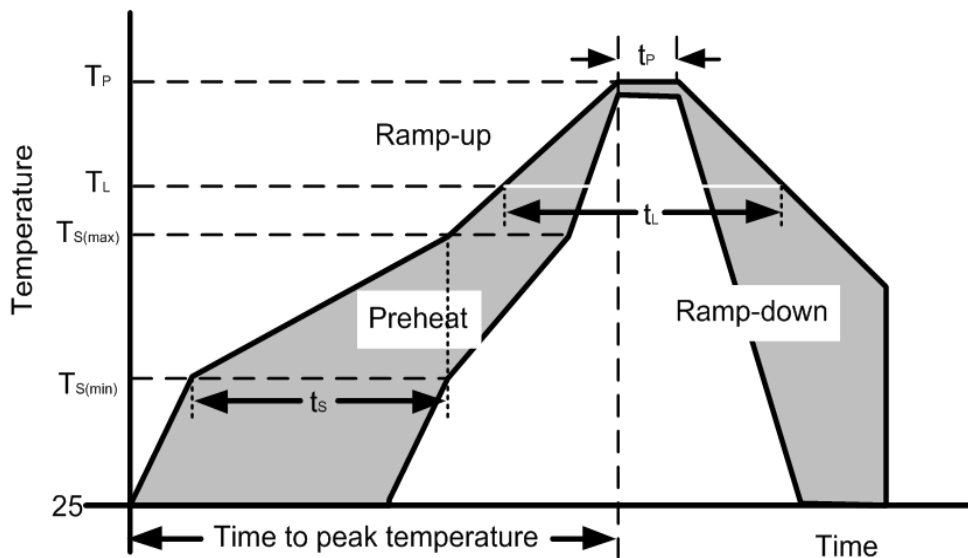

Outline Drawing –DFN2.6x2.6-10L

DFN2.6x2.6-10L

DIMENSIONS				
SYMBOL	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	0.450	0.550	0.018	0.022
A2	0.000	0.050	0.000	0.002
A1	0.150REF		0.006REF	
D	2.550	2.650	0.101	0.105
D1	2.100	2.200	0.083	0.087
E	2.550	2.650	0.101	0.105
E1	1.210	1.310	0.048	0.052
b	0.200	0.300	0.008	0.012
e	0.500BSC.		0.020BSC	
L	0.300	0.400	0.012	0.016

DIMENSIONS		
DIM	INCHES	MILLIMETERS
B	0.081	2.05
C	0.100	2.50
F	0.050	1.26
G	0.073	1.85
P	0.020	0.50
X	0.012	0.30
Y	0.025	0.65
Z	0.124	3.15

**NOTES:**

Controlling Dimension: Millimeter.

Marking Codes

Part Number	WS3.3-2R1N	Marking Code	2R1N YYWW (YYWW: Date Code)
-------------	------------	--------------	-----------------------------------

Package Information

Qty: 3k/Reel

CONTACT INFORMATION

No.1001, Shiwan (7) Road, Pudong District, Shanghai, P.R.China.201207  
 Tel: 86-21-68969993 Fax: 86-21-50757680 Email: [market@way-on.com](mailto:market@way-on.com)  
 WAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.

**WAYON** ® is registered trademark of Wayon Corporation.

Specifications are subject to change without notice.  
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
 Users should verify actual device performance in their specific applications.

单击下面可查看定价，库存，交付和生命周期等信息

[>>WAY-ON\(维安\)](#)