




WSxxP6SMB(-B)

Power Transient Voltage Suppressor

Features

- 600 watts Peak Pulse Power (10/1000 μ s)
- Unidirectional and Bidirectional Protection
- Fast Response Time : Typically < 1ns
- Excellent Clamping Capability
- Built-in Strain relief
- Low inductance
- Low profile package
- High temperature solder:260 $^{\circ}$ C/10 seconds at terminal

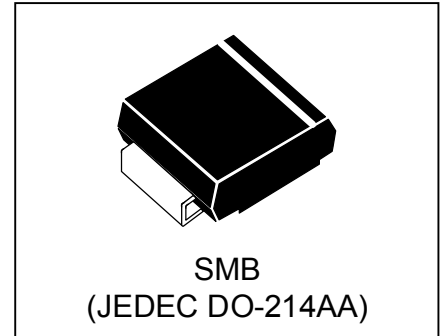

Mechanical Characteristics

- JEDEC DO-214AA package
- Molding compound flammability rating:
UL 94V-0
- Marking : Marking Code
- Packaging : Tape and Reel per EIA 481
- RoHS &UL497B Compliant

Applications

- I/O Interfaces
- Power lines
- Automotive and Telecommunication
- Computers & Consumer Electronics
- Industrial Electronics

| Absolute Maximum Rating | | | |
|---|------------------|--------------------------------|--------------|
| Rating | Symbol | Value | Units |
| Peak Pulse Power (tp =10/1000 μ s) (see Note1,2& 3) | P _{PPM} | 600 | Watts |
| Peak pulse current (10/1000 μ s) (see Note2&3) | I _{PPM} | See Electrical Characteristics | A |
| Peak Forward surge current (see Note4&5) | I _{FSM} | 100 | A |
| Power Dissipation on infinite heat sink T _L = 50 $^{\circ}$ C (Fig5) | P _D | 5.0 | W |
| Operating Junction Temperature range | T _J | -65 to + 150 | $^{\circ}$ C |
| Storage Temperature range | T _{STG} | -65 to + 150 | $^{\circ}$ C |

Note1: Peak Pulse Power Rating as Pulse Width, per Fig1.


Note2: Peak Pulse Power or Current Derated above TA=25 $^{\circ}$ C Per Fig. 2 and Non-Repetitive Current Pulse, Per Fig.3.

Note3: Mounted on 5.0x5.0mm² copper pad to each terminal.

Note4: 8.3ms Single Half Sine Wave or Equivalent Square Wave.

Note5: Maximum Forward Surge Current only for Unidirectional Device per Fig6.

Pin Configuration

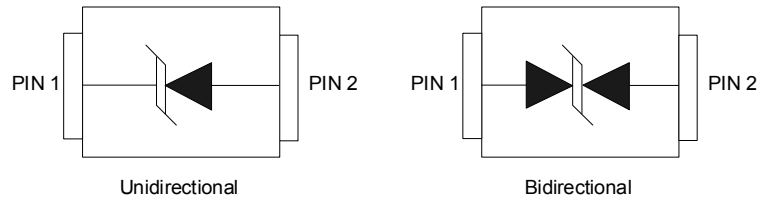

Electrical Characteristics

| Part Number | | Reverse Stand off Voltage V_{RWM} (Volts) | Breakdown Voltage | | Test Current I_T (mA) | Maximum Clamping Voltage $V_C@I_{PP}$ (Volts) | Maximum Peak Pulse Current I_{pp} (Amps) | Maximum Reverse Leakage $I_R@V_{RWM}$ (μ A) |
|-------------|--------------|---|-------------------------|-------|-------------------------------|---|--|--|
| | | | V_{BR} (Volts) $@I_T$ | | | | | |
| UNI-POLAR | BI-POLAR | | MIN | MAX | | | | |
| WS5.0P6SMB | WS5.0P6SMB-B | 5.0 | 6.40 | 7.07 | 10 | 9.2 | 65.2 | 800 |
| WS6.0P6SMB | WS6.0P6SMB-B | 6.0 | 6.67 | 7.37 | 10 | 10.3 | 58.3 | 800 |
| WS6.5P6SMB | WS6.5P6SMB-B | 6.5 | 7.22 | 7.98 | 10 | 11.2 | 53.6 | 500 |
| WS7.0P6SMB | WS7.0P6SMB-B | 7.0 | 7.78 | 8.60 | 10 | 12.0 | 50.0 | 200 |
| WS7.5P6SMB | WS7.5P6SMB-B | 7.5 | 8.33 | 9.21 | 1 | 12.9 | 46.5 | 100 |
| WS8.0P6SMB | WS8.0P6SMB-B | 8.0 | 8.89 | 9.83 | 1 | 13.6 | 44.1 | 50 |
| WS8.5P6SMB | WS8.5P6SMB-B | 8.5 | 9.44 | 10.40 | 1 | 14.4 | 41.7 | 20 |
| WS9.0P6SMB | WS9.0P6SMB-B | 9.0 | 10.00 | 11.10 | 1 | 15.4 | 39.0 | 10 |
| WS10P6SMB | WS10P6SMB-B | 10 | 11.10 | 12.30 | 1 | 17.0 | 35.3 | 5 |
| WS11P6SMB | WS11P6SMB-B | 11 | 12.20 | 13.50 | 1 | 18.2 | 33.0 | 5 |
| WS12P6SMB | WS12P6SMB-B | 12 | 13.30 | 14.7 | 1 | 19.9 | 30.2 | 5 |
| WS13P6SMB | WS13P6SMB-B | 13 | 14.40 | 15.90 | 1 | 21.5 | 27.9 | 1 |
| WS14P6SMB | WS14P6SMB-B | 14 | 15.60 | 17.20 | 1 | 23.2 | 25.9 | 1 |
| WS15P6SMB | WS15P6SMB-B | 15 | 16.70 | 18.50 | 1 | 24.4 | 24.6 | 1 |
| WS16P6SMB | WS16P6SMB-B | 16 | 17.80 | 19.70 | 1 | 26.0 | 23.1 | 1 |
| WS17P6SMB | WS17P6SMB-B | 17 | 18.90 | 20.90 | 1 | 27.6 | 21.7 | 1 |
| WS18P6SMB | WS18P6SMB-B | 18 | 20.00 | 22.10 | 1 | 29.2 | 20.5 | 1 |
| WS20P6SMB | WS20P6SMB-B | 20 | 22.20 | 24.50 | 1 | 32.4 | 18.5 | 1 |
| WS22P6SMB | WS22P6SMB-B | 22 | 24.40 | 26.90 | 1 | 35.5 | 16.9 | 1 |
| WS24P6SMB | WS24P6SMB-B | 24 | 26.70 | 29.50 | 1 | 38.9 | 15.4 | 1 |
| WS26P6SMB | WS26P6SMB-B | 26 | 28.90 | 31.90 | 1 | 42.1 | 14.3 | 1 |
| WS28P6SMB | WS28P6SMB-B | 28 | 31.10 | 34.40 | 1 | 45.4 | 13.2 | 1 |
| WS30P6SMB | WS30P6SMB-B | 30 | 33.30 | 36.80 | 1 | 48.4 | 12.4 | 1 |
| WS33P6SMB | WS33P6SMB-B | 33 | 36.70 | 40.60 | 1 | 53.3 | 11.3 | 1 |
| WS36P6SMB | WS36P6SMB-B | 36 | 40.00 | 44.20 | 1 | 58.1 | 10.3 | 1 |
| WS40P6SMB | WS40P6SMB-B | 40 | 44.40 | 49.10 | 1 | 64.5 | 9.3 | 1 |

Electrical Characteristics (Cont.)

| Part Number | | Reverse Stand off Voltage V_{RWM} (Volts) | Breakdown Voltage | | Test Current I_T (mA) | Maximum Clamping Voltage $V_C@I_{PP}$ (Volts) | Maximum Peak Pulse Current I_{PP} (Amps) | Maximum Reverse Leakage $I_R@V_{RWM}$ (μ A) |
|-------------|--------------|---|----------------------------|-------|-------------------------------|---|--|--|
| | | | $V_{BR}(\text{Volts})@I_T$ | | | | | |
| UNI-POLAR | BI-POLAR | | MIN | MAX | | | | |
| WS43P6SMB | WS43P6SMB-B | 43 | 47.80 | 52.80 | 1 | 69.4 | 8.6 | 1 |
| WS45P6SMB | WS45P6SMB-B | 45 | 50.00 | 55.30 | 1 | 72.7 | 8.3 | 1 |
| WS48P6SMB | WS48P6SMB-B | 48 | 53.30 | 58.90 | 1 | 77.4 | 7.8 | 1 |
| WS51P6SMB | WS51P6SMB-B | 51 | 56.70 | 62.70 | 1 | 82.4 | 7.3 | 1 |
| WS54P6SMB | WS54P6SMB-B | 54 | 60.00 | 66.30 | 1 | 87.1 | 6.9 | 1 |
| WS58P6SMB | WS58P6SMB-B | 58 | 64.40 | 71.20 | 1 | 93.6 | 6.4 | 1 |
| WS60P6SMB | WS60P6SMB-B | 60 | 66.70 | 73.70 | 1 | 96.8 | 6.2 | 1 |
| WS64P6SMB | WS64P6SMB-B | 64 | 71.10 | 78.60 | 1 | 103 | 5.8 | 1 |
| WS70P6SMB | WS70P6SMB-B | 70 | 77.80 | 86.00 | 1 | 113 | 5.3 | 1 |
| WS75P6SMB | WS75P6SMB-B | 75 | 83.30 | 92.10 | 1 | 121 | 5.0 | 1 |
| WS78P6SMB | WS78P6SMB-B | 78 | 86.70 | 95.80 | 1 | 126 | 4.8 | 1 |
| WS85P6SMB | WS85P6SMB-B | 85 | 94.40 | 104 | 1 | 137 | 4.4 | 1 |
| WS90P6SMB | WS90P6SMB-B | 90 | 100 | 111 | 1 | 146 | 4.1 | 1 |
| WS100P6SMB | WS100P6SMB-B | 100 | 111 | 123 | 1 | 162 | 3.7 | 1 |
| WS110P6SMB | WS110P6SMB-B | 110 | 122 | 135 | 1 | 177 | 3.4 | 1 |
| WS120P6SMB | WS120P6SMB-B | 120 | 133 | 147 | 1 | 193 | 3.1 | 1 |
| WS130P6SMB | WS130P6SMB-B | 130 | 144 | 159 | 1 | 209 | 2.9 | 1 |
| WS150P6SMB | WS150P6SMB-B | 150 | 167 | 185 | 1 | 243 | 2.5 | 1 |
| WS160P6SMB | WS160P6SMB-B | 160 | 178 | 197 | 1 | 259 | 2.3 | 1 |
| WS170P6SMB | WS170P6SMB-B | 170 | 189 | 209 | 1 | 275 | 2.2 | 1 |
| WS180P6SMB | WS180P6SMB-B | 180 | 201 | 222 | 1 | 292 | 2.1 | 1 |
| WS200P6SMB | WS200P6SMB-B | 200 | 224 | 247 | 1 | 324 | 1.9 | 1 |
| WS220P6SMB | WS220P6SMB-B | 220 | 246 | 272 | 1 | 356 | 1.7 | 1 |
| WS250P6SMB | WS250P6SMB-B | 250 | 279 | 309 | 1 | 405 | 1.5 | 1 |
| WS300P6SMB | WS300P6SMB-B | 300 | 335 | 371 | 1 | 486 | 1.3 | 1 |
| WS350P6SMB | WS350P6SMB-B | 350 | 391 | 432 | 1 | 567 | 1.1 | 1 |
| WS400P6SMB | WS400P6SMB-B | 400 | 447 | 494 | 1 | 648 | 0.9 | 1 |
| WS440P6SMB | WS440P6SMB-B | 440 | 492 | 543 | 1 | 713 | 0.9 | 1 |

Typical Characteristics

Figure 1: Peak Pulse Power Rating Curve

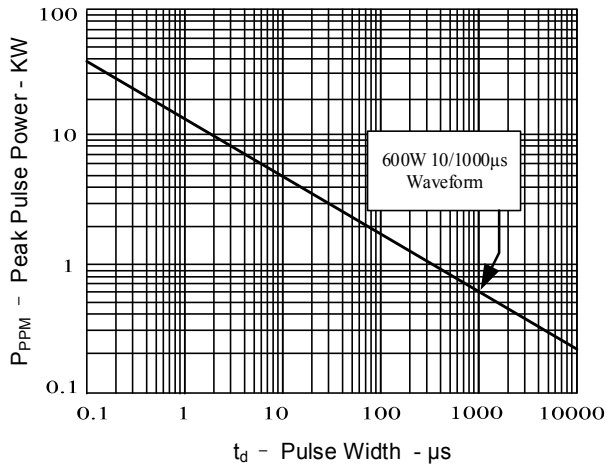


Figure 2: Pulse Derating Curve

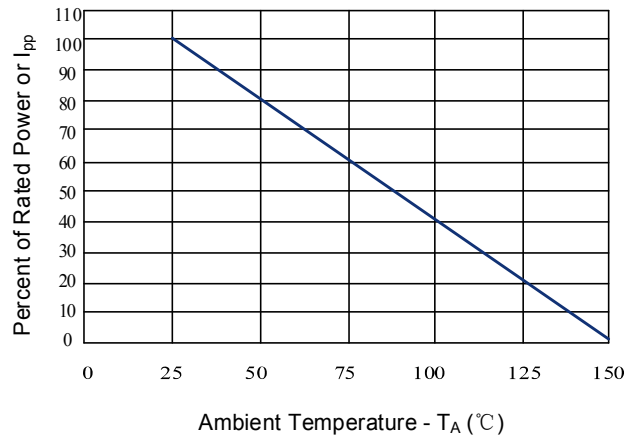


Figure 3: Pulse Waveform

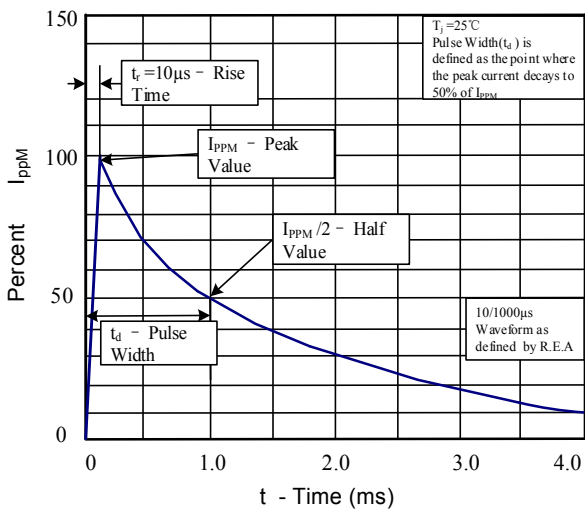


Figure 4: Typical Junction Capacitance

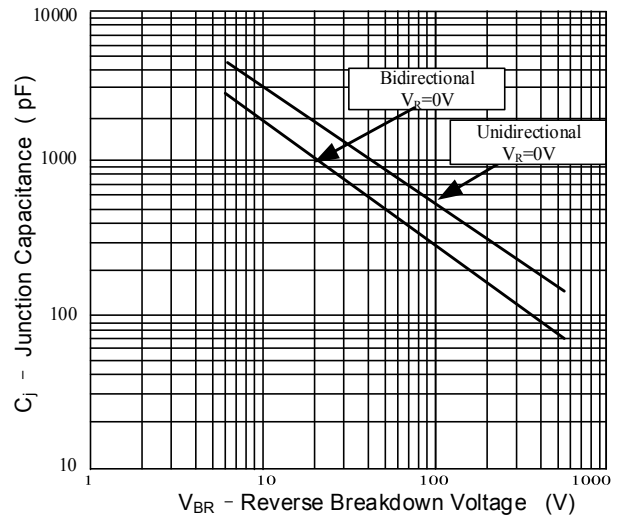


Figure 5: Steady State Power Dissipation Derating Curve



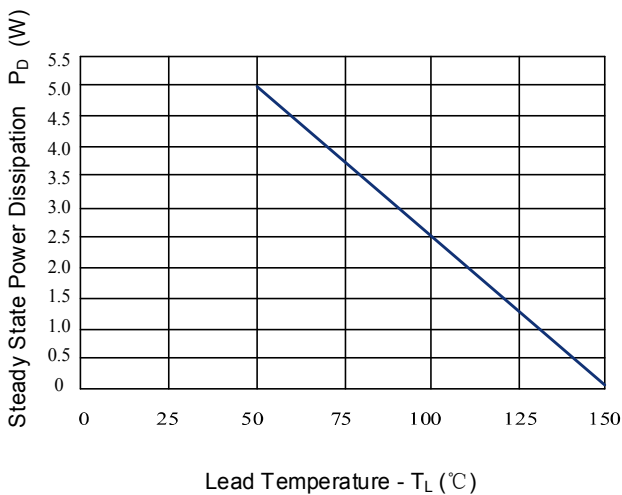


Figure 6: Maximum Non-Repetitive Forward Surge Current Only Unidirectional

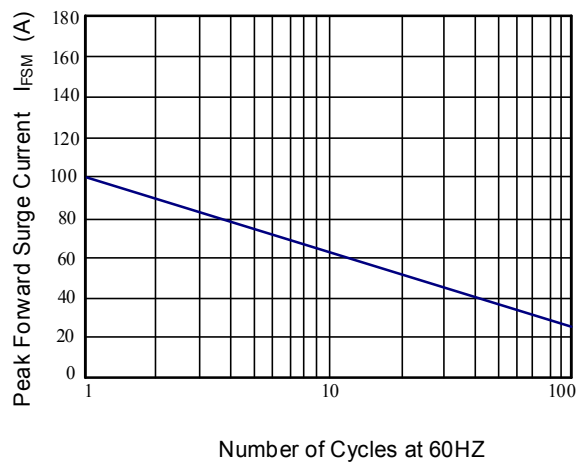


Soldering Parameters

| Reflow Condition | | |
|--|----------------------------------|-------------------------|
| Pre Heat | Temperature min ($T_{s(min)}$) | 150°C |
| | Temperature max ($T_{s(max)}$) | 200°C |
| | Time (min to max) (t_s) | 60-190 s |
| Average ramp up rate (Liquidus Temp) (T_L) to peak | | 3°C/s max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3°C/s max |
| Reflow | Temperature (T_L) (Liquidus) | 217°C |
| | Temperature (t_L) | 60-150 s |
| Peak Temperature (T_P) | | 260 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (t_p) | | 20-40 s |
| Ramp-down Rate | | 5°C/s max |
| Time 25°C to peak Temperature (T_P) | | 8 minutes max |
| Do not exceed | | 260°C |

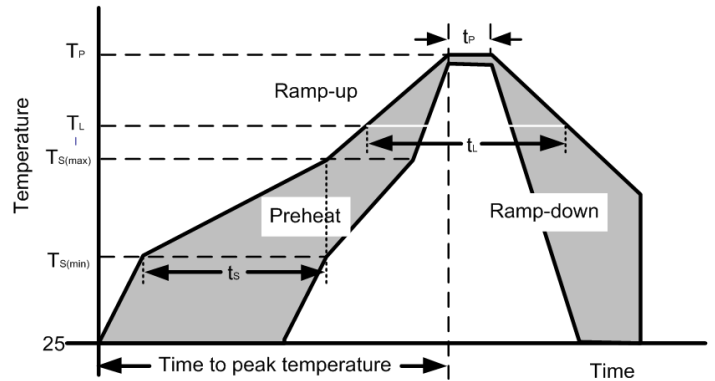


Outline Drawing – SMB(DO-214AA)

| Ref. (mm) | Millimeters | |
|-----------|-------------|-------|
| | Min. | Max. |
| A | 2.130 | 2.600 |
| A1 | - | 0.300 |
| B | 1.900 | 2.200 |
| E | 4.100 | 4.750 |
| E1 | 5.210 | 5.590 |
| D | 3.300 | 3.940 |
| L | 0.760 | 1.520 |

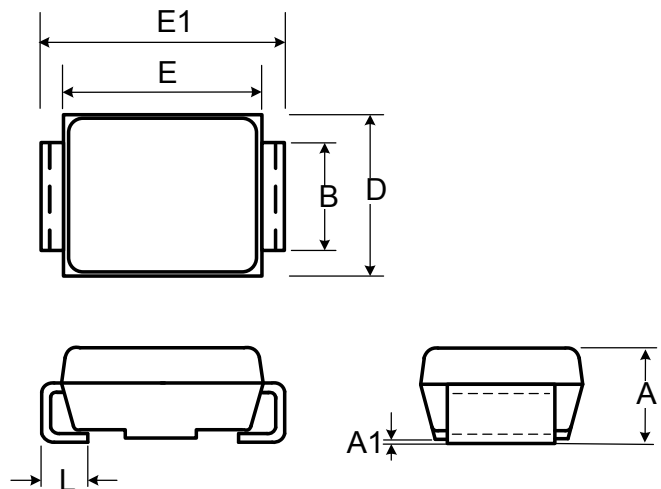


Recommended Solder Pad Layout

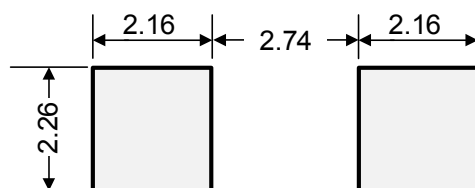


Dimensions in mm

Part Numbering System

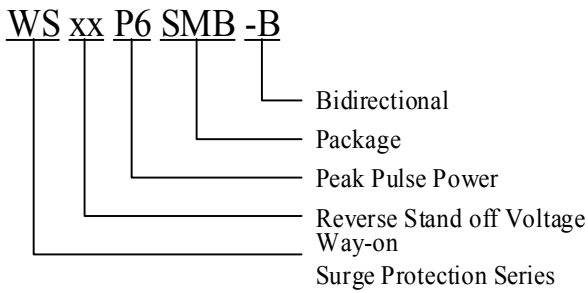

Part Marking System

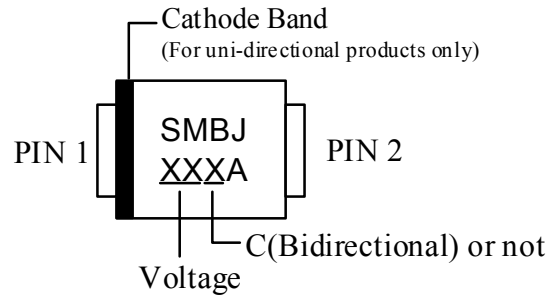

Package Information

| Package Type | Description | Quantity (pcs) | Standard |
|---------------|----------------------------|----------------|-----------|
| SMB(DO-214AA) | Tape & Reel -12mm/13" tape | 3000 | EIA-481-D |

Contact Information

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201207
 Tel: +86-21-68969993 Fax: 86-21-50757680 Email: market@way-on.com
 WAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.

WAYON® is registered trademarks of Wayon Corporation.

*Specifications are subject to change without notice.
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
 Users should verify actual device performance in their specific applications.*

单击下面可查看定价，库存，交付和生命周期等信息

[>>WAY-ON\(维安\)](#)