

## Features

- 3-electrode arrester
- Small size
- Extremely fast response time
- Stable performance over life
- Extremely low capacitance (<2pF)
- High insulation resistance



## Application

- Line protection
- Station protection
- Base stations

## Electrical specifications

Part number	DC Spark-over Voltage <sup>1) 2)</sup>	Maximum Impulse Spark-over Voltage	Service Life <sup>3)</sup>	Insulation resistance	Capacitance	Marking Code
	100V/s	1kv/μs	8/20μs 10times	@ 100V <sub>DC</sub>	@ 1 MHz	
	(V)	(V)	(KA)	(GΩ)	(pF)	
GDTN3RS8A-75	75 ± 30%	600	20	> 1@50V <sub>DC</sub>	< 2	None
GDTN3RS8A-90	90 ± 30%	600	20	> 1@50V <sub>DC</sub>	< 2	None
GDTN3RS8A-150	150 ± 20%	650	20	> 1	< 2	None
GDTN3RS8A-230	230 ± 20%	700	20	> 1	< 2	None
GDTN3RS8A-350	350 ± 20%	950	20	> 1	< 2	None
GDTN3RS8A-420	420 ± 20%	1000	20	> 1	< 2	None
GDTN3RS8A-470	470 ± 20%	1100	20	> 1	< 2	None
GDTN3RS8A-600	600 ± 20%	1300	20	> 1	< 2	None

1) At delivery AQL 0.65 level II, DIN ISO 2859.

2) In ionized mode.


3) Tests according to ITU-T Rec. K. 12 and UL 497B.

Terms and current waveforms in accordance with: ITU-T Rec. K.12; IEC 61643-21 and DIN 57845/VDE0845.


## Thermal Resistances

Symbol	Parameter	Value	Unit
T <sub>s</sub>	Storage & Operating temperature range	-40 to +90	°C

## Dimensional drawing

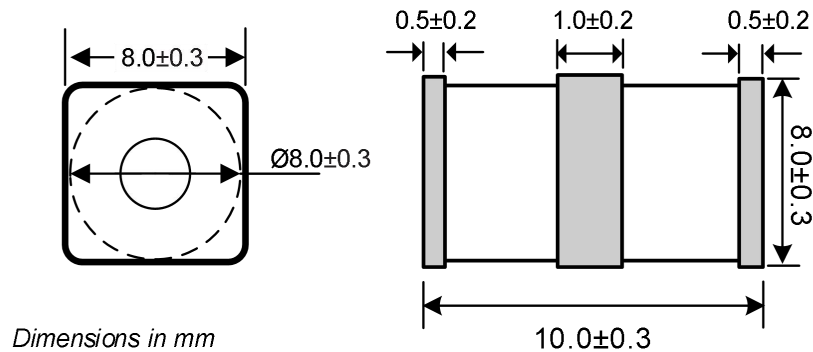


## Recommended Solder Pad Layout

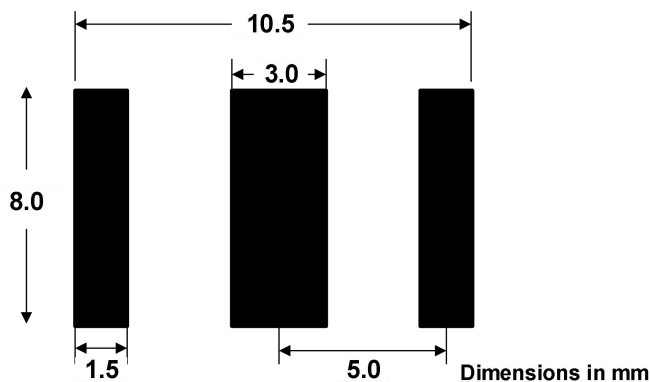

## Cautions and warnings

- Gas Discharge Tubes must not be operated directly in power supply networks.
- Gas Discharge Tubes may become hot in case of longer periods of current stress (danger of burning).
- Gas Discharge Tubes may be used only within their specified values. In case of overload, the head contacts may fail or the component may be destroyed.
- Damaged Gas Discharge Tubes must not be re-used.
- Operation beyond the rated voltage or current may result in rupture electrical arcing or flame.

## Part Numbering System

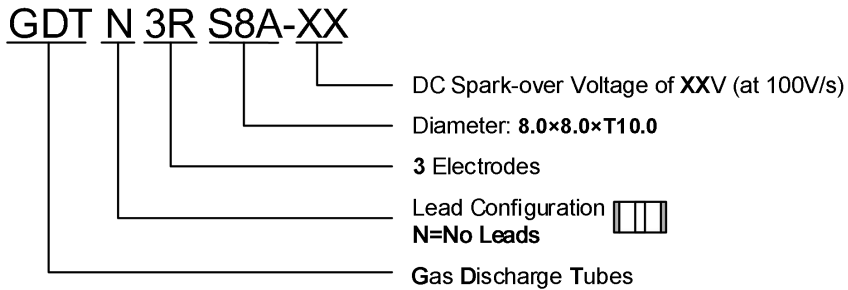

## Package Information

Quantity: 300pcs/reel

## Contact Information

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201207

Tel: 86-21-68969993 Fax: 86-21-50757680 Email: market@way-on.com

WAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.

**WAYON** ® are registered trademarks of Wayon Corporation.

*Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.*

单击下面可查看定价，库存，交付和生命周期等信息

[>>WAY-ON\(维安\)](#)