

● 1. General Description

The WP2106 is a current limited P-channel MOSFET power switch designed for high-side load switching applications. This switch operates with inputs ranging from 2.5V to 5.5V, making it ideal for both 3.3V and 5V systems. An integrated current-limiting circuit protects the input supply against large currents which may cause the supply to fall out of regulation. The WP2106 includes thermal shutdown protection that prevents damage to the device when a continuous over-current condition causes excessive heating by turning off the switch. The load of the switch can be up to 1.4A. The quiescent current is only 28 μ A in active mode while it is less than 1 μ A in shutdown mode. Fault flag ($\overline{\text{FLT}}$) can indicate over current and fault conditions.

The WP2106 is available in Pb-free packages and is characterized for operation over the free-air temperature range of - 40°C to 85°C.


● 2. Features

- Input Voltage Range: 2.5V to 5.5V
- Accurate Current Limit
- Reverse Current Blocking
- Short-Circuit Response: 2 μ s
- Very Low Quiescent Current: 28 μ A (Typ.)
- 1 μ A Max Shutdown Supply Current
- Fault Flag ($\overline{\text{FLT}}$) output for over current and fault conditions.
- Built-in Pull-up Resistor for EN Pin
- Automatic Output Discharge at Shutdown
- Under-Voltage Lockout
- Thermal Shutdown
- 8kV ESD Rating
- Package: SOT23-3, SOT23-5

● 3. Applications

- Laptop/Desktop Computers and Netbooks
- 3G Wireless Cards
- Smart Phones and PDAs
- LCD TVs and Monitors
- Set-Top-Boxes
- MP3/MP4
- Printers
- Portable Game Players
- Portable Media Players and MIDs
- USB Keyboards
- USB Hard Disk Drives
- USB Memory Drives
- USB Hubs


4. Typical Application

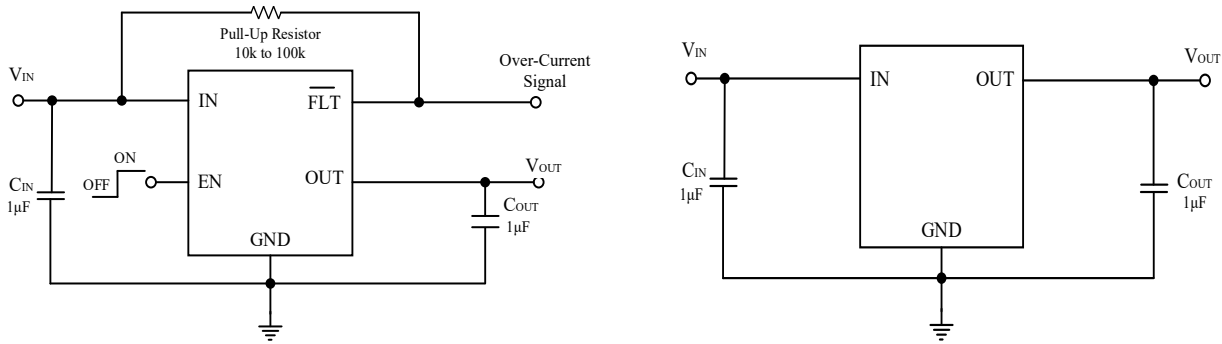


Note: Tantalum or Aluminum Electrolytic capacitors (C_{IN} and C_{OUT}) may be required for USB applications

5. Pin Configuration

(Top View)



SOT23-3



SOT23-5

6. Pin Description

PIN NUMBER		PIN NAME	I/O	PIN FUNCTION
SOT23-3	SOT23-5			
2	1	OUT	O	Switch output.
1	2	GND		Common ground.
	3	$\overline{\text{FLT}}$	O	Fault FLAG output. Open drain output that indicates an over current, supply under voltage or over temperature state.
	4	EN	I	Enable input. Active High.
3	5	IN	I	Switch input.

● 7. Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)⁽¹⁾

PARAMETER	RATING	UNIT
IN, EN, $\overline{\text{FLT}}$ Voltage	-0.3 to 6	V
OUT Voltage	-0.3 to $V_{\text{IN}} + 0.3$	V
OUT Current	Internal Limited	A
Power Dissipation	400	mW
Package Thermal Resistance(θ_{JA})	250	°C/W
Operating Junction Temperature	-40 to 125	°C
Storage Temperature	-55 to 150	°C
Lead Temperature (Soldering, 10 sec)	260	°C
ESD(HBM)	8000	V

NOTE: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

● 8. Recommended Operating Conditions

SYMBOL	PARAMETER	MIN	MAX	UNIT
V_{IN}	Input Voltage	2.5	5.5	V
I_{OUT}	Output Current		0.6	A
			1.0	
			1.4	
T_{A}	Operating Ambient Temperature	-40	85	°C

● 9. Electrical Characteristics

($V_{IN} = 5\text{ V}$, $V_{EN} = 5\text{ V}$, $C_{IN}=1\mu\text{F}$, $C_{OUT}=1\mu\text{F}$, $T_A=25^\circ\text{C}$, unless otherwise noted)

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP.	MAX	UNIT	
I_{SHDN}	Shutdown Quiescent Current	Disabled, OUT floating or shorted to ground		0.3	1	μA	
I_Q	Quiescent Current	Enabled, OUT floating		28	60	μA	
$R_{DS(ON)}$	Switch on-resistance	$V_{IN}=5\text{V}$		70	120	$\text{m}\Omega$	
I_{LIM}	Current Limit	$V_{IN}=5\text{V}$	WP2106-A	0.8	1	1.2	A
			WP2106-B	1.2	1.5	1.8	
			WP2106-C	1.6	2	2.4	
V_{IL}	EN Input Logic-Low Voltage	Note 1			0.5	V	
V_{IH}	EN Input Logic-High Voltage	Note 1	1.5			V	
$R_{\overline{FLT}}$	\overline{FLT} Low Resistance	Note 2		80		Ω	
$t_{\overline{FLT_DELAY}}$	\overline{FLT} Delay Time	Note 2		15		ms	
I_{SINK}	EN Input leakage	$V_{EN} = 5\text{V}$		0.01	1	μA	
		$V_{EN} = 0\text{V}$	-2	-0.25		μA	
V_{UVLO}	Input UVLO Threshold	Enabled, V_{IN} rising	1.4	1.8	2.2	V	
V_{UVLO_HYS}	Input UVLO Hysteresis			0.1		V	
I_{REV}	Reverse Leakage Current	$V_{IN} = 0\text{V}$, $V_{OUT} = 5\text{V}$, I_{REV} at V_{IN}		0.1	1	μA	
t_{ON}	Output Turn-on Delay Time	$R_{LOAD}=100\Omega$	0.2	0.5	1	ms	
t_R	Output Turn-on Rise Time	$R_{LOAD}=100\Omega$	0.2	0.4	0.8	ms	
t_{OFF}	Output Turn-off Delay Time	$R_{LOAD}=100\Omega$	0.2	0.5	0.8	ms	
t_F	Output Turn-off Fall Time	$R_{LOAD}=100\Omega$	100	350	500	μs	


SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP.	MAX	UNIT
R_{DIS}	Output Discharge Resistance	Disabled, $V_{IN} = 5V$, $V_{OUT}=1V$	50	120	300	Ω
T_{SHDN}	Thermal Shutdown Threshold	Note 2		150		$^{\circ}C$
T_{HYS}	Thermal shutdown hysteresis	Note 2		20		$^{\circ}C$


Note 1: EN includes a small pull-up current source, nominally 0.1 μ A. When EN pin is floating, the chip is enabled.

Note 2: Guaranteed by design.


10. Typical Performance Characteristics

($V_{IN} = 5V$, $V_{EN} = 5V$, $C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $T_A=25^\circ C$, unless otherwise noted)

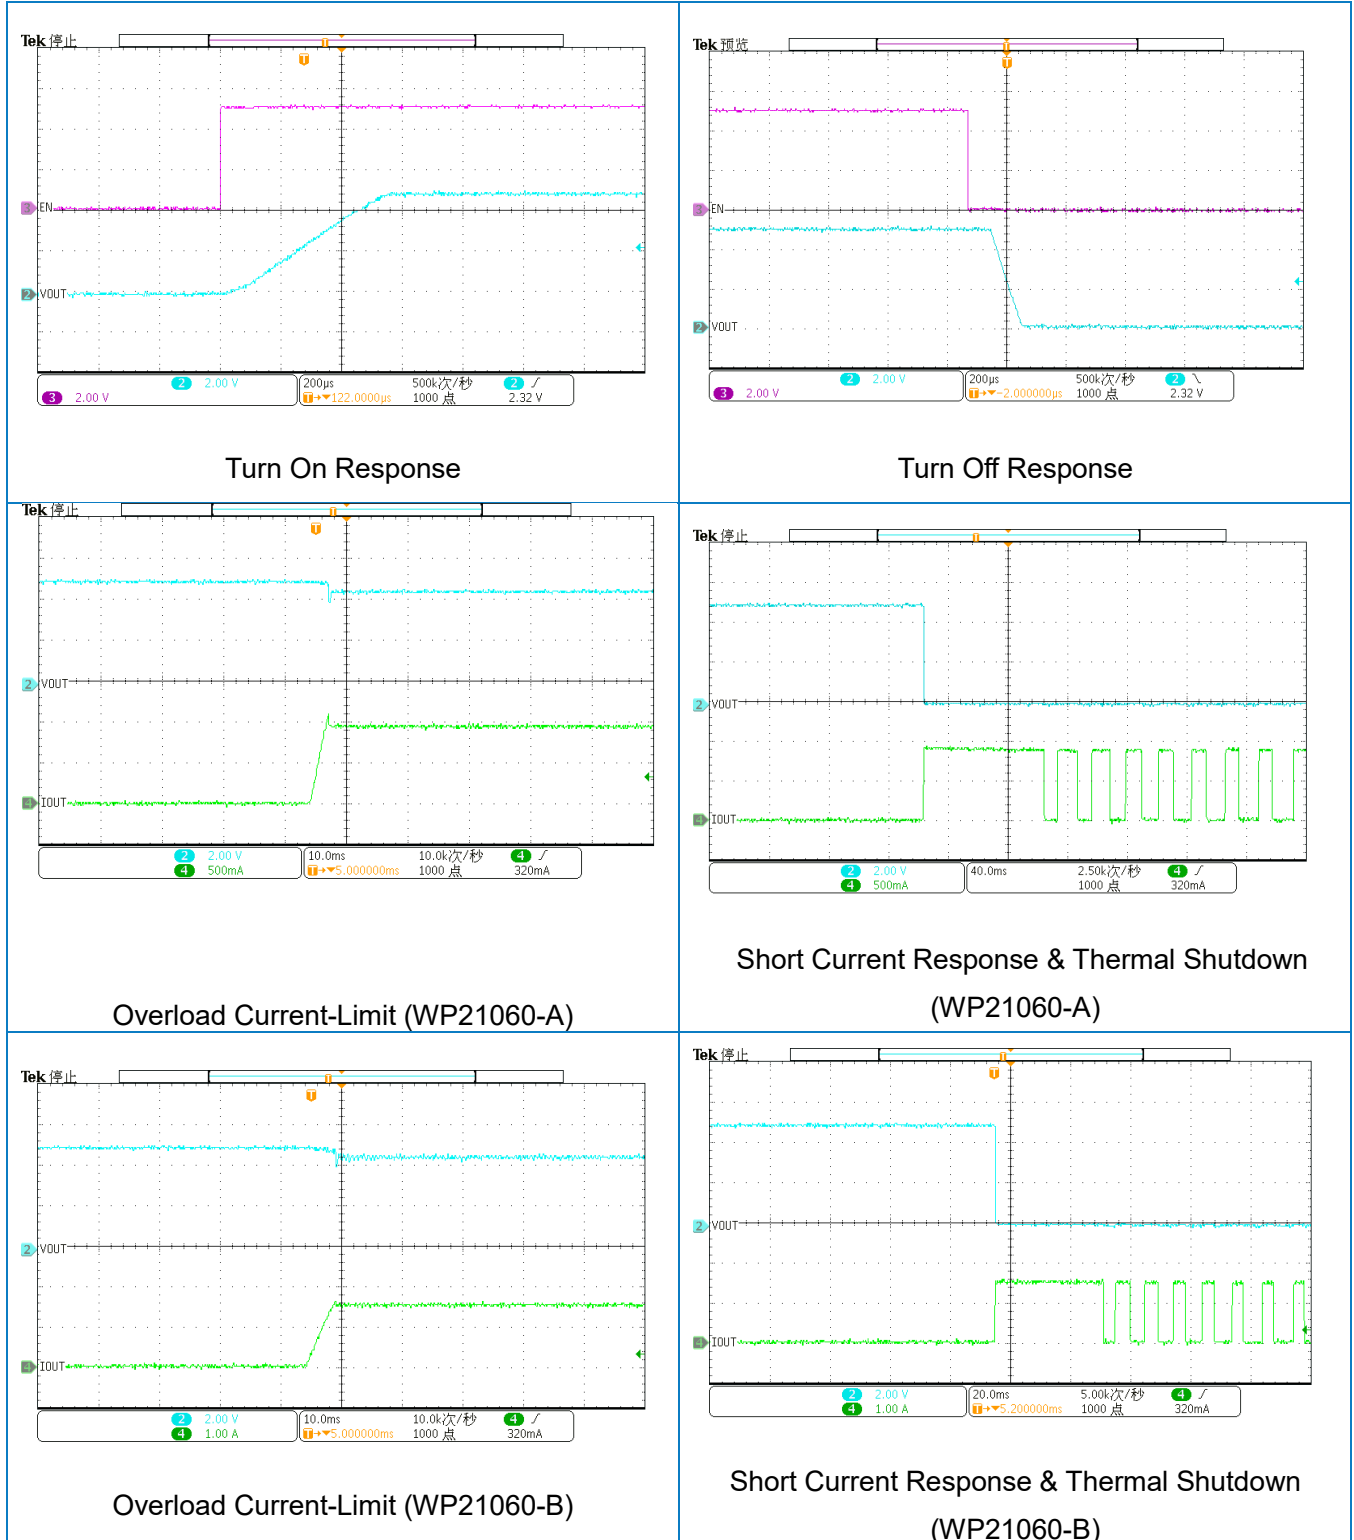


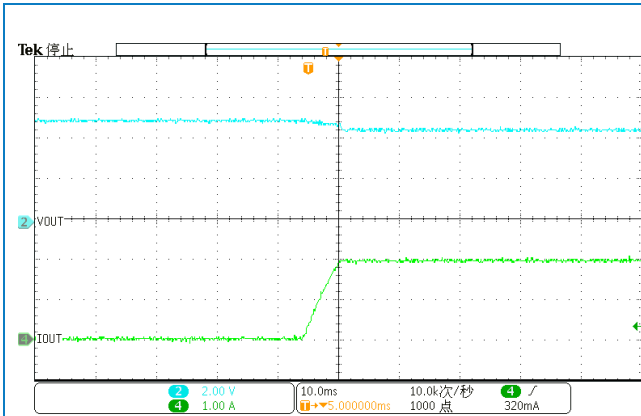


Overload Current-Limit (WP21060-C)

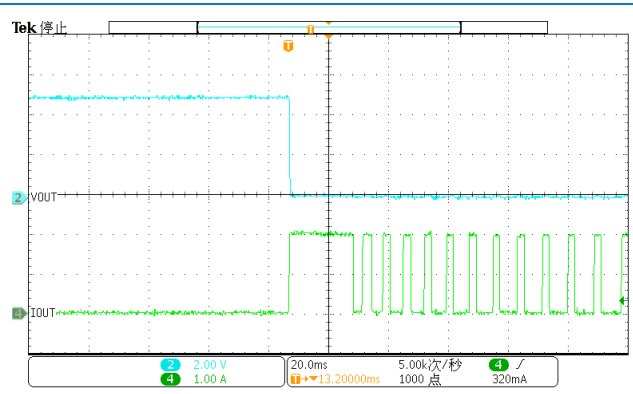


Short Current Response & Thermal Shutdown (WP21060-C)

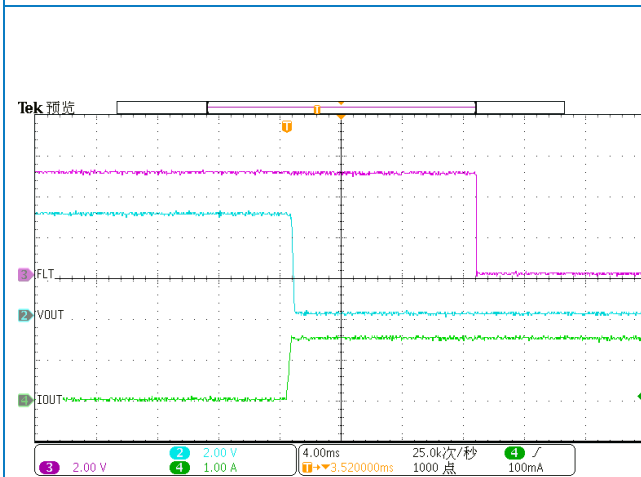


FLT Response

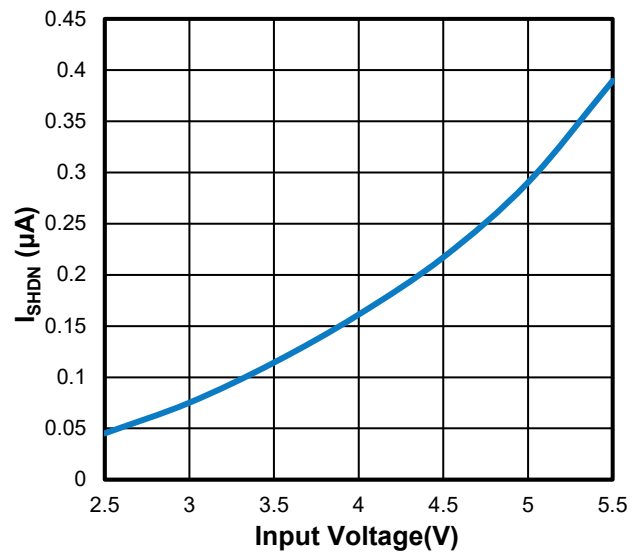


Shutdown Quiescent Current vs. Input Voltage

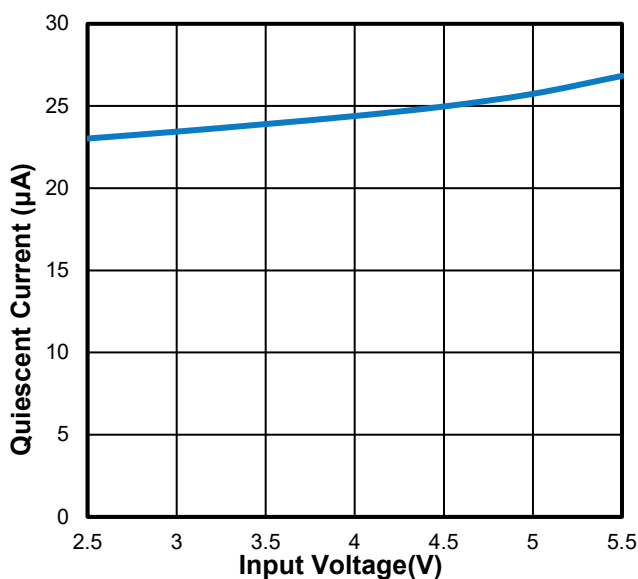


Quiescent Current vs. Input Voltage

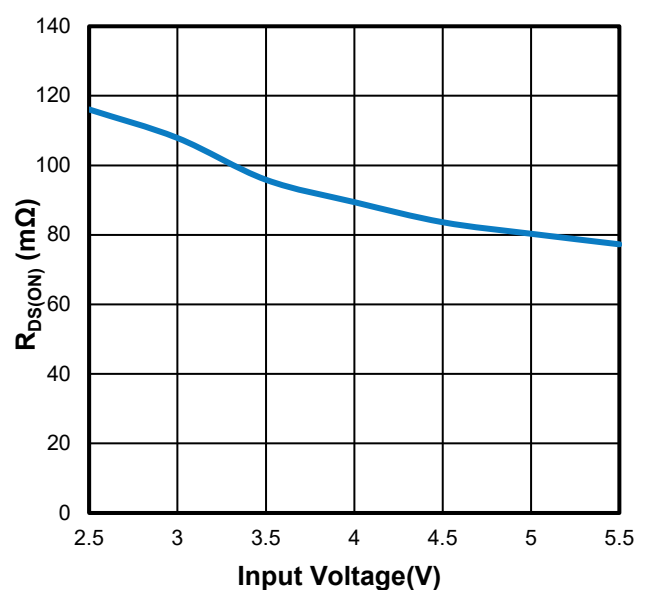


Switch On-Resistance vs. Input Voltage

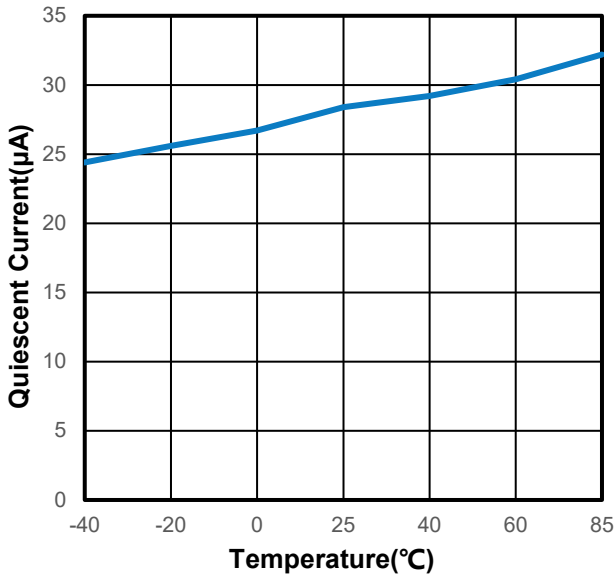


Quiescent Current vs. Ambient Temperature

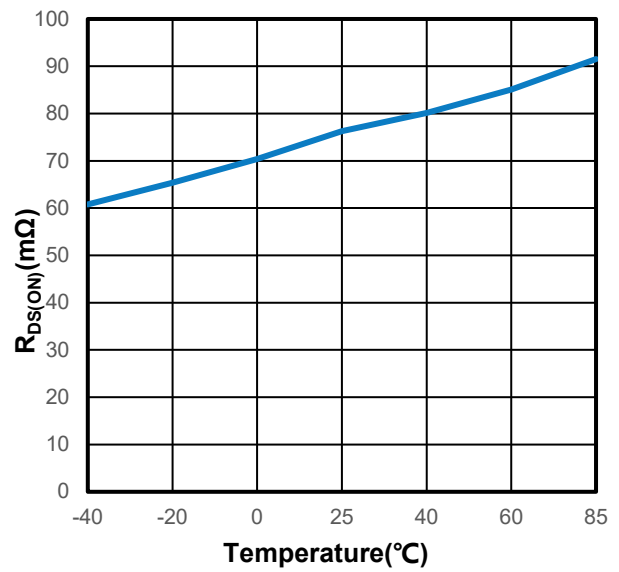





Switch On-Resistance vs. Ambient Temperature

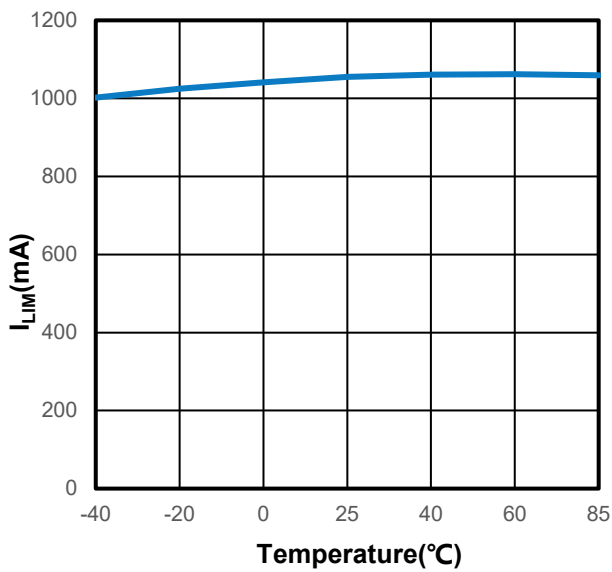

Current Limit vs. Ambient Temperature
(WP2106-A)

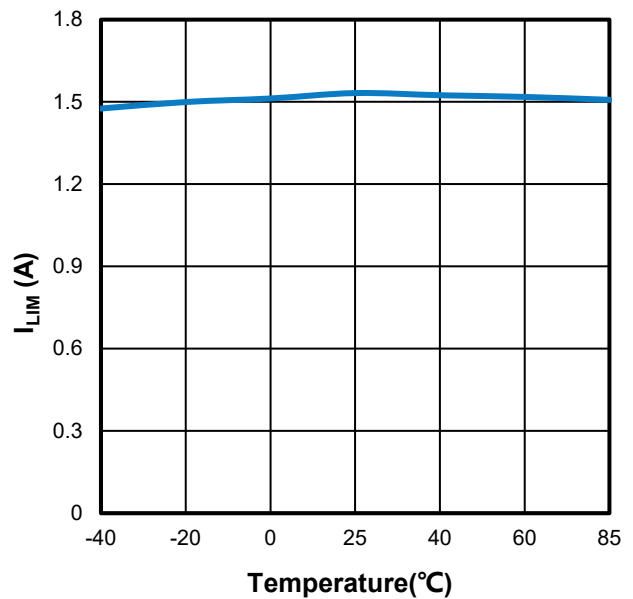

Current Limit vs. Ambient Temperature
(WP2106-B)

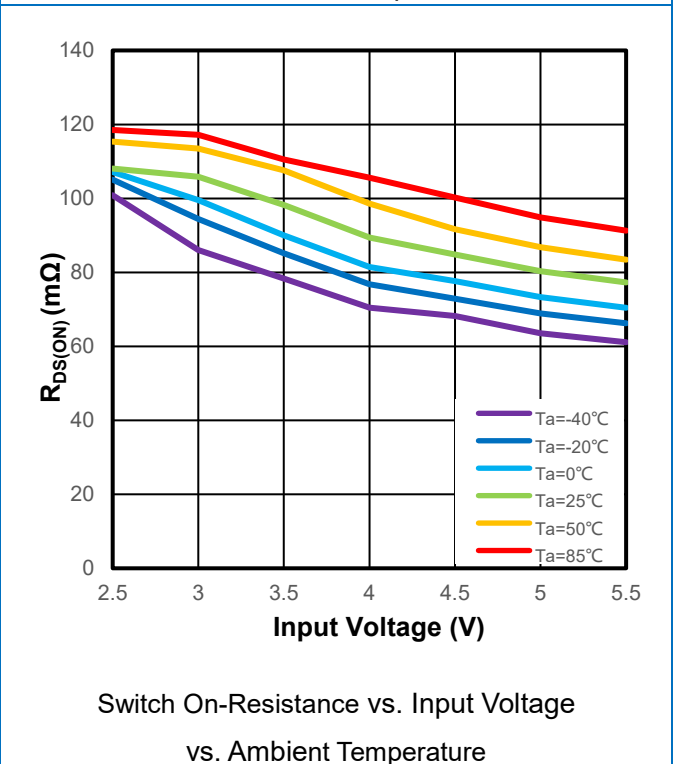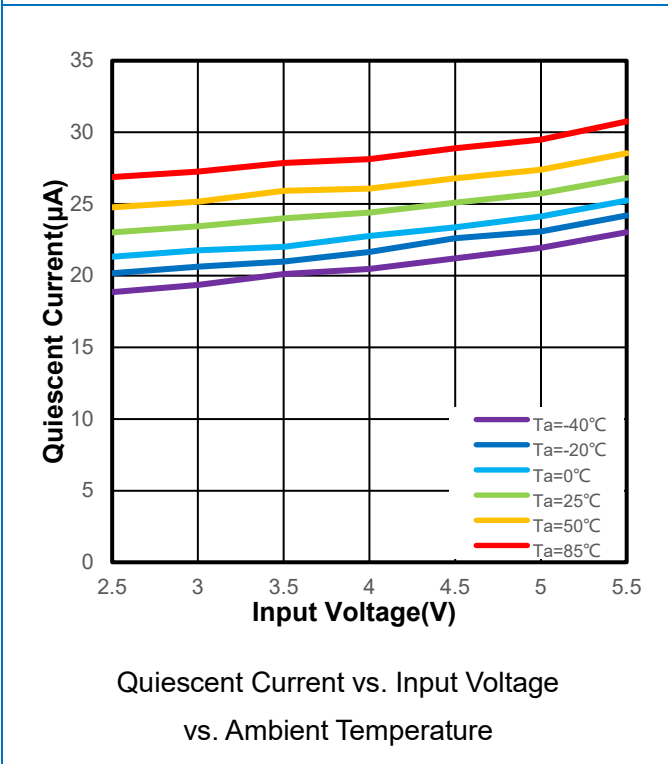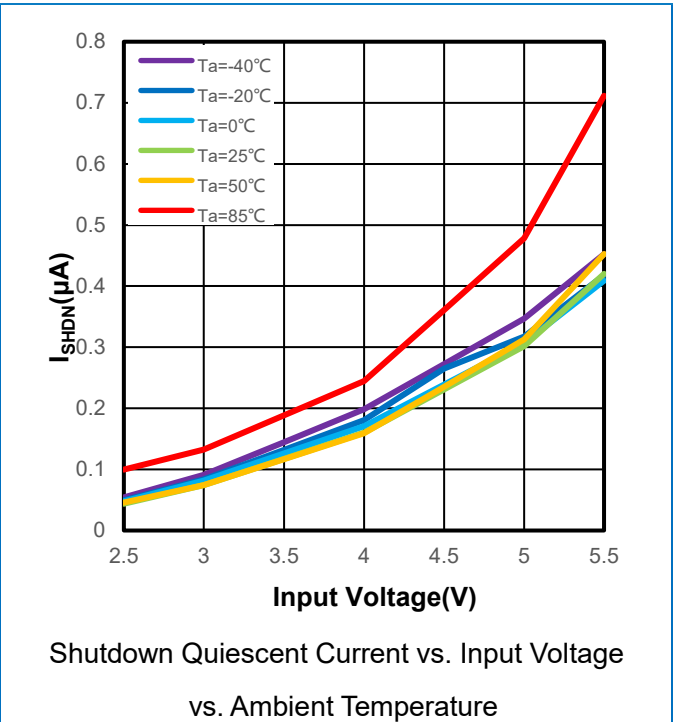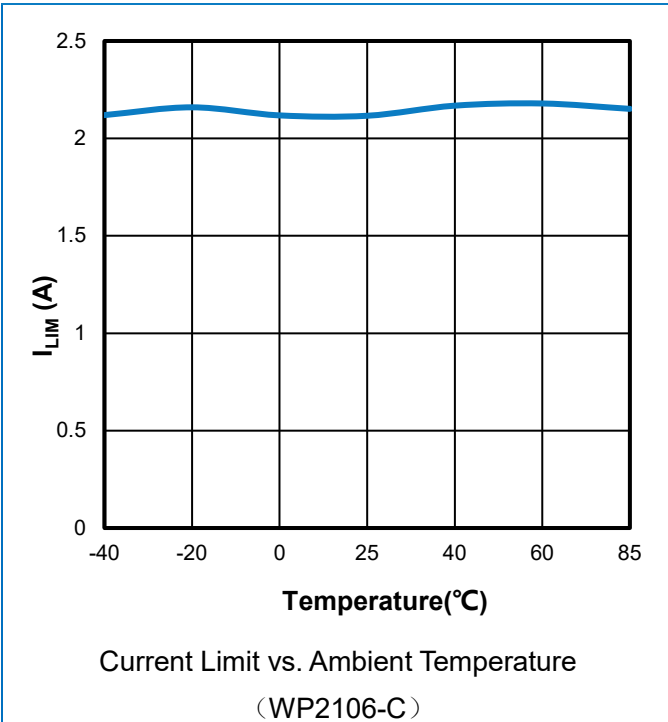


● 11. Function Description

● 11.1 Overview

The WP2106 load switches are 5.5V, current limited load switches in a SOT23-3/SOT23-5 package. The devices contain a 70 mΩ current-limited P-channel MOSFET that can operate over an input voltage range of 2.5 V to 5.5V. When the switch current reaches the maximum limit, the WP2106 operates in a constant-current mode to prohibit excessive currents from causing damage. WP2016A has a current limit of 1 A , WP2016B has a current limit of 1.5 A, and WP2016C has a current limit of 2 A.

● 11.2 Block Diagram

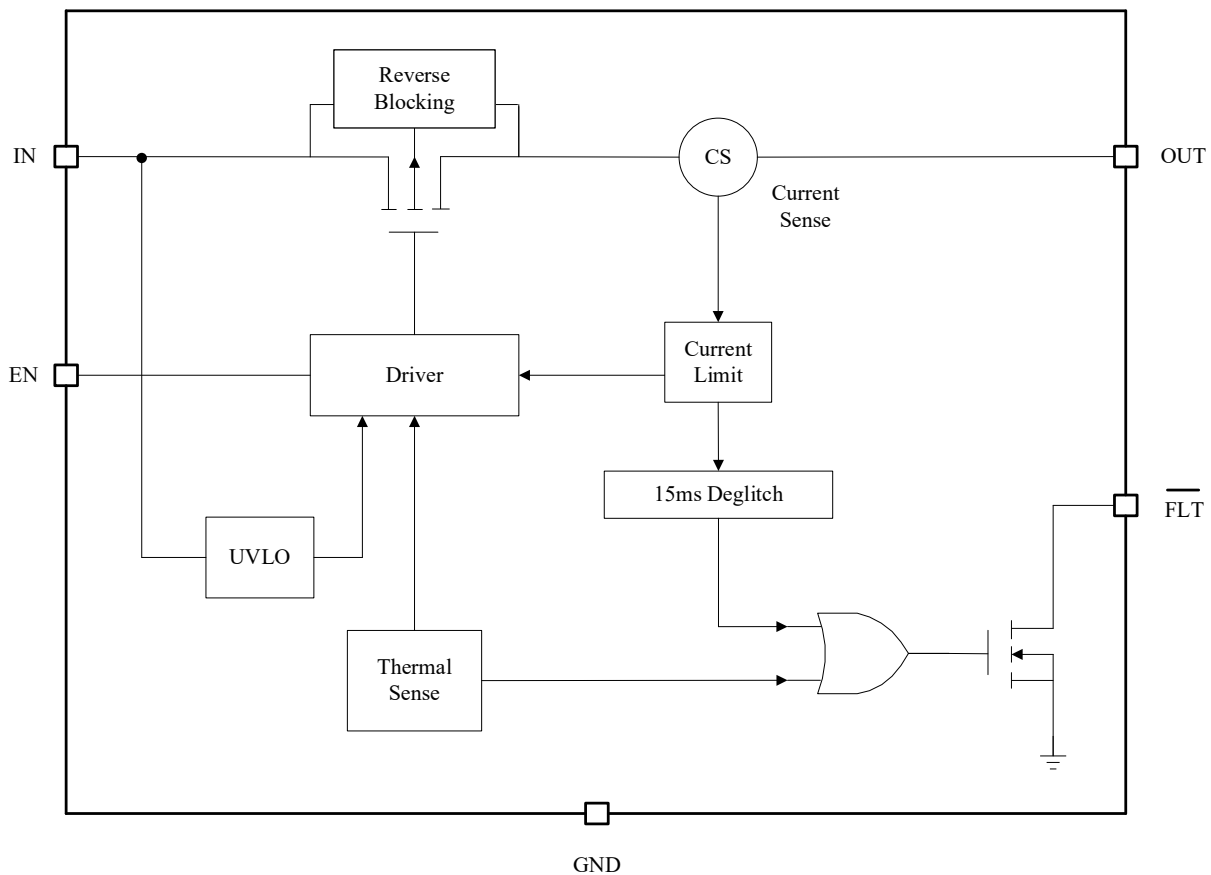

● 11.3 Feature Description

● 11.3.1 Current Limiting

When the switch current reaches the maximum limit, the WP2106 operates in a constant-current mode to prohibit excessive currents from causing damage. A current limit condition immediately pulls the fault signal pin low ($\overline{\text{FLT}}$ pin), which remains in the constant-current mode until the switch current falls below the current limit.

- **11.3.2 Fault Reporting**

When an overcurrent, input undervoltage, or overtemperature condition is detected, $\overline{\text{FLT}}$ is set active low to indicate the fault mode. $\overline{\text{FLT}}$ is an open-drain MOSFET and requires a pull up resistor.

- **11.3.3 Thermal Shutdown**

Thermal shutdown protects the device from internally or externally generated excessive temperatures. During an overtemperature condition the switch is turned off. The switch automatically turns on again if the temperature of the die drops below the threshold temperature.

- **11.3.4 Quick Output Discharge**

The WP2106 include the Quick Output Discharge (QOD) feature, in order to discharge the application capacitor connected on OUT pin.

- **11.4 Device Functional Modes**

When the EN pin is actively pulled high and no fault conditions are present, the switch will be turned on, connecting V_{IN} to V_{OUT} . When the EN pin is actively pulled low regardless of the fault condition, the switch will be turned off. In the event that the current limit is exceeded, the device will operate in a constant-current mode and pull the FLT pin low until the fault condition is removed. During thermal shutdown conditions, the switch will automatically turn off and will turn back on again if the temperature of the die drops below the threshold temperature.

- **12 Application and Implementation**

- **12.1 Application Information**

- **12.1.1 EN Control**

The EN pin controls the state of the switch. Activating EN continuously holds the switch in the on state as long as there is no fault. An undervoltage lockout or thermal shutdown event will override the EN pin control and turn off the switch. EN is active high and has a low threshold, making it capable of interfacing with low-voltage signals.

- **12.1.2 Input Capacitor**

To limit the voltage drop on the input supply caused by transient inrush current, a capacitor 1 μ F or larger must be placed between the IN and GND pins.

- **12.1.3 Output Capacitor**

A 1 μ F or larger capacitor should be placed between the OUT and GND pins. This capacitor will prevent parasitic board inductances from forcing OUT below GND when the switch turns off.

- **12.1.4 Undervoltage Lockout**

The undervoltage lockout turns off the switch if the input voltage drops below the undervoltage lockout threshold. Under-voltage detection functions only when the switch is enabled.

● 12.1.5 Power Dissipation and Junction Temperature

The junction temperature of the switch depend on several factors such as the load, PCB layout, ambient temperature and package type. Power dissipation can be calculated based on the output current and the $R_{DS(ON)}$ of the switch as below.

$$P_D = R_{DS(ON)} \times I^2$$

The junction temperature can be estimated by the following thermal equation:

$$T_J = P_D \times \theta_{JA} + T_A$$

Where:

T_A = Ambient temperature

θ_{JA} = Thermal resistance

P_D = Total power dissipation

With all possible conditions, the junction temperature must be within the range specified under operating conditions. The maximum output current must be derated at higher ambient temperature to ensure the junction temperature does not exceed the maximum junction temperature which is 125°C.


● 13. Power Supply Recommendations

The device is designed to operate from a V_{IN} range of 2.5 V to 5.5 V. This supply must be well regulated and placed as close to the device terminal as possible with the recommended 1µF bypass capacitor. If the supply is located more than a few inches from the device terminals, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. If additional bulk capacitance is required, an electrolytic, tantalum, or ceramic capacitor of 10 µF may be sufficient

● 14. Layout

For best performance, all traces should be as short as possible, the input and output capacitors should be placed close to the device terminal to minimize the effects that parasitic trace inductances may have on normal and short-circuit operation. The V_{IN} terminal should be bypassed to ground with low ESR ceramic bypass capacitors. The typical recommended bypass capacitance is 1µF ceramic with X5R or X7R dielectric. This capacitor should be placed as close to the device terminals as possible. Using wide traces for V_{IN} , V_{OUT} , and GND will help minimize parasitic electrical effects along with minimizing the case to ambient thermal impedance.

● 14.1 Layout Example

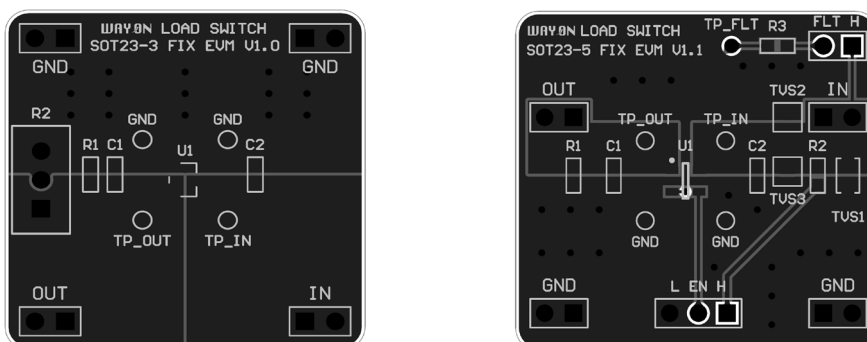

● 15 Evaluation Modules

Evaluation Modules (EVMs) are available to help evaluate the device performance. We have evaluation modules for different packages, you can contact us by phone or address at the end to get the evaluation module or schematic.

The module names are listed in the table below.

NAME	PACKAGE	EVALUATION MODULE
WP2106	SOT23-3	WAYON LOAD SWITCH SOT23-3 FIX EVM V1.0
	SOT23-5	WAYON LOAD SWITCH SOT23-5 FIX EVM V1.1

● 16 Naming Conventions

WP AB CC-D EEE F

WP: WAYON Protection IC;

A: Product Category –2: Load Switch;

B: Maximum Output Current – 1: <2A;

CC: Serial number;


D: Output Current – A: 0.6A; B:1A; C:1.4A;

EEE: Package – A30: SOT23-3 / A50: SOT23-5;

F: R-Reel & T-tube;


● 17 Package Information

SOT 23-3

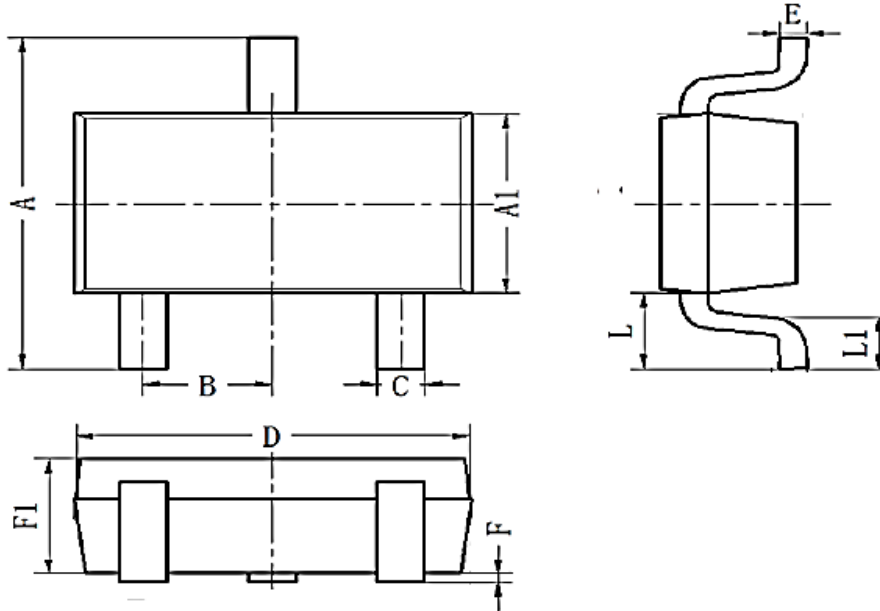

SYMBOL	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	2.60	2.80	3.00
A1	1.50	1.60	1.70
B	0.95BSC		
C	0.25	0.40	0.50
D	2.82	2.92	3.02
E	0.10	0.15	0.20
L	0.59REF		
L1	0.30	0.45	0.60
F1	0.90	1.10	1.30
F	0.00	0.08	0.15

SOT 23-5

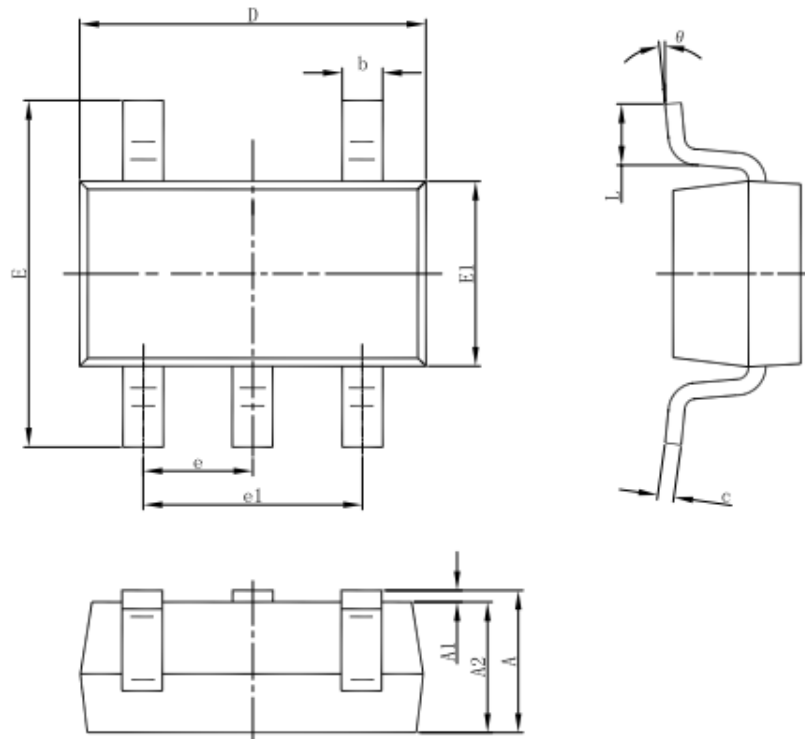

SYMBOL	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	1.000	1.175	1.350
A1	0.000	0.075	0.150
A2	1.000	1.100	1.200
b	0.300	0.400	0.500
c	0.100	0.150	0.200
D	2.820	2.920	3.020
E1	1.500	1.600	1.700
E	2.600	2.800	3.000
e	0.950(BSC)		
e1	1.800	1.900	2.000
L	0.300	0.450	0.600
theta	0°	4°	8°

● 18 Ordering Information

PART NUMBER	CURRENT LIMIT	PACKAGE	PACKING QUANTITY	MARKING*
WP2106-AA30R	1A	SOT23-3	3k/Reel	2106 AXXXX
WP2106-BA30R	1.5A	SOT23-3	3k/Reel	2106 BXXXX
WP2106-CA30R	2A	SOT23-3	3k/Reel	2106 CXXXX
WP2106-AA50R	1A	SOT23-5	3k/Reel	2106 AXXXX
WP2106-BA50R	1.5A	SOT23-5	3k/Reel	2106 BXXXX
WP2106-CA50R	2A	SOT23-5	3k/Reel	2106 CXXXX

Contact Information

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201202

Tel: 86-21-68960674 Fax: 86-21-50757680 Email: market@way-on.com

WAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.

WAYON® is registered trademark of Wayon Corporation.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

单击下面可查看定价，库存，交付和生命周期等信息

[>>WAY-ON\(维安\)](#)