

General Description

The WSF4022 is the highest performance trench Dual N-Ch MOSFET with extreme high cell density, which provide excellent $R_{DS(on)}$ and gate charge for most of the synchronous buck converter applications.

The WSF4022 meet the RoHS and Green Product requirement 100% EAS guaranteed with full function reliability approved.

Features


- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available

Product Summary

$B_{V_{DS}}$	R_{DSON}	I_D
40V	21m Ω	20A

Applications

- For Fan Pre-driver H-Bridge.
- Motor Control.
- Synchronous Rectification.

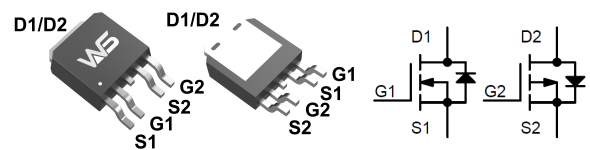TO-252-4L Pin Configuration

Absolute Maximum Ratings @ $T_A=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	40	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current (Continuous) *AC	$T_C=25^\circ\text{C}$ 20*	A
I_D	Drain Current (Continuous) *AC	$T_C=100^\circ\text{C}$ 20*	A
I_D	Drain Current (Continuous) *AC	$T_A=25^\circ\text{C}$ 12.2	A
I_D	Drain Current (Continuous) *AC	$T_A=70^\circ\text{C}$ 10.2	A
I_{DM}^a	Pulsed Drain Current	$T_C=25^\circ\text{C}$ 80*	A
E_{AS}^b	Single Pulse Avalanche Energy	$L=0.5\text{mH}$ 25	mJ
I_{AS}^b	Avalanche Current	$L=0.5\text{mH}$ 17.8	A
P_D	Maximum Power Dissipation	$T_C=25^\circ\text{C}$ 39.4	W
P_D	Maximum Power Dissipation	$T_C=100^\circ\text{C}$ 19.7	W
P_D	Power Dissipation	$T_A=25^\circ\text{C}$ 6.4	W
P_D	Power Dissipation	$T_A=70^\circ\text{C}$ 4.2	W
T_J	Operating Junction Temperature Range	175	$^\circ\text{C}$
T_{STG}	Operating Temperature/ Storage Temperature	-55~175	$^\circ\text{C}$
$R_{\theta JA}^b$	Thermal Resistance Junction-Ambient	Steady State ^c 60	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance Junction to Case	3.8	$^\circ\text{C}/\text{W}$

Note *: Limited by package.

Note a: Pulse width limited by max. junction temperature.

Note b: UIS tested and pulse width limited by maximum junction temperature 175°C (initial temperature $T_j=25^\circ\text{C}$).

Note c: Surface Mounted on 1in² pad area, $t=999\text{sec}$.

Electrical Characteristics @ $T_A=25^{\circ}\text{C}$ unless otherwise noted


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Static						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	40			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 32V, V_{GS} = 0V$			1	μA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 32V, V_{GS} = 0V, T_J=85^{\circ}\text{C}$			30	μA
I_{GSS}	Gate Leakage Current	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS} = V_{DS}, I_{DS} = 250\mu A$	1.1	1.6	2.5	V
$R_{DS(on)}^d$	Drain-Source On-state Resistance	$V_{GS} = 10V, I_D = 10A$		16	21	m Ω
		$V_{GS} = 4.5V, I_D = 5A$		18	25	m Ω
Gate Charge^e						
Qg	Total Gate Charge	$V_{DS}=20V, V_{GS}=4.5V, I_D=10A$		7.5		nC
Qgs	Gate-Source Charge			3.24		nC
Qgd	Gate-Drain Charge			2.75		nC
Dynamic^e						
Ciss	Input Capacitance	$V_{GS}=0V, V_{DS}=20V, f=1\text{MHz}$		815		pF
Coss	Output Capacitance			95		pF
Crss	Reverse Transfer Capacitance			60		pF
td (on)	Turn-on Delay Time	$V_{DD}=20V, V_{GEN}=10V, I_{DS}=1A, R_G=6\Omega, R_L=20\Omega.$		7.8		ns
tr	Turn-on Rise Time			6.9		ns
td(off)	Turn-off Delay Time			22.4		ns
tf	Turn-off Fall Time			4.8		ns
Diode						
V_{SD}^d	Diode Forward Voltage	$I_{SD}=1A, V_{GS}=0V$		0.75	1.1	V
trr	Input Capacitance	$I_{DS}=10A, dl_{SD}/dt=100A/\mu s$		13		ns
Qrr	Output Capacitance			8.7		nC

Note d: Pulse test ; pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.


Note e: Guaranteed by design, not subject to production testing.

Typical Characteristics


Power Dissipation

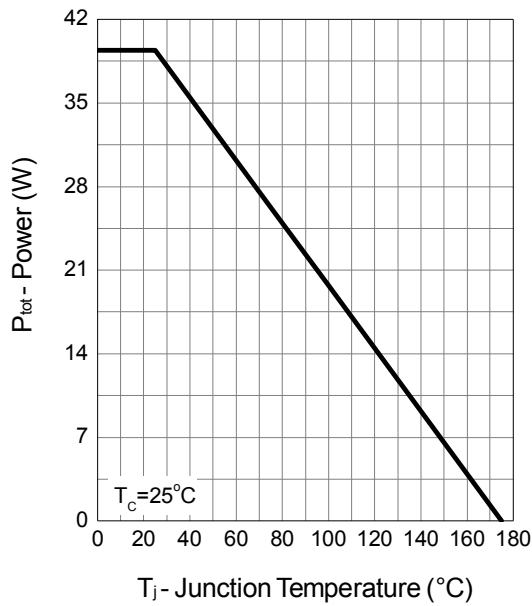


Drain Current

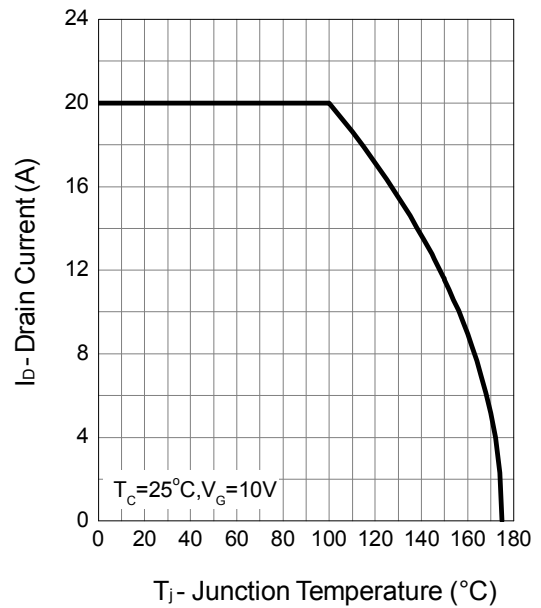

Safe Operation Area

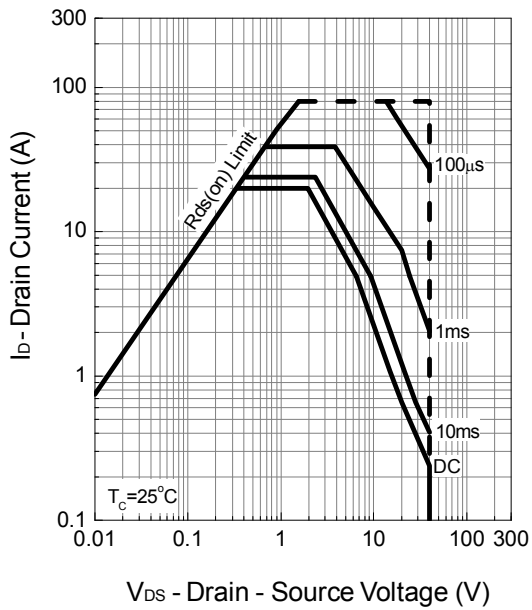


Thermal Transient Impedance

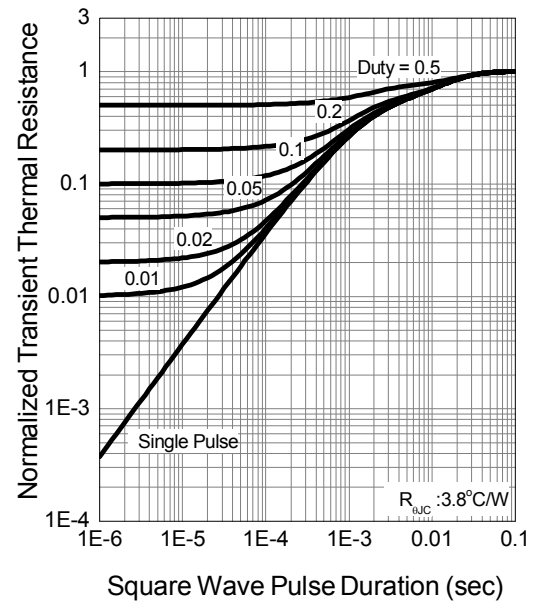


Typical Characteristics


Output Characteristics

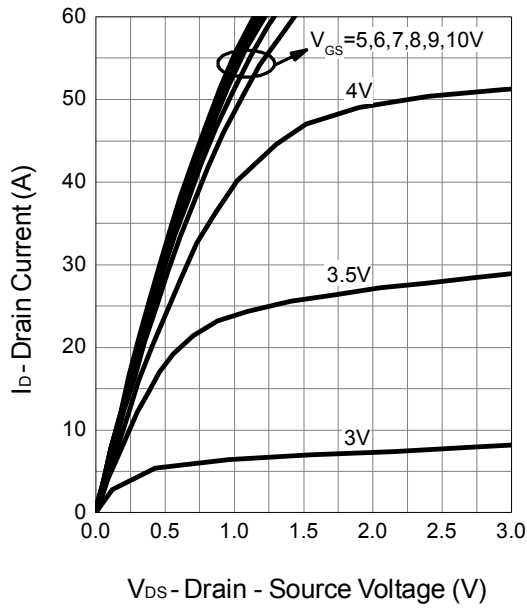


Drain-Source On Resistance

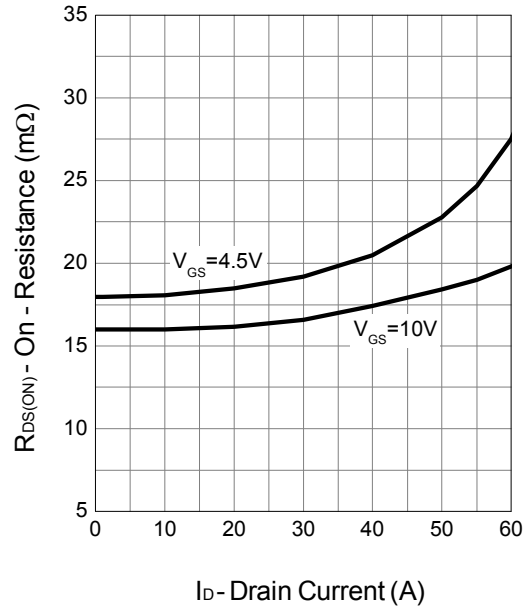

Gate-Source On Resistance

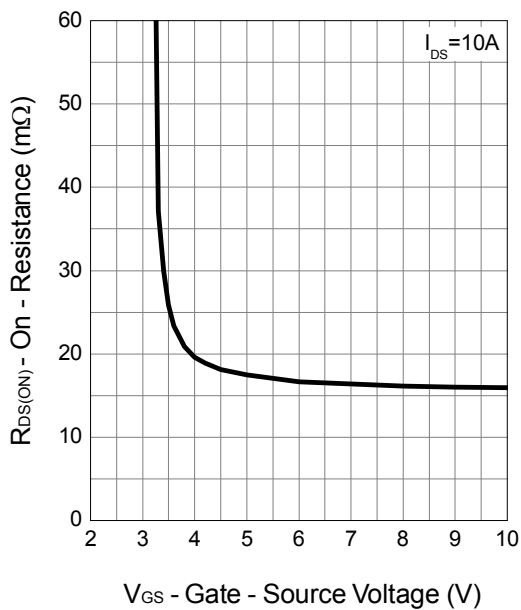


Gate Threshold Voltage

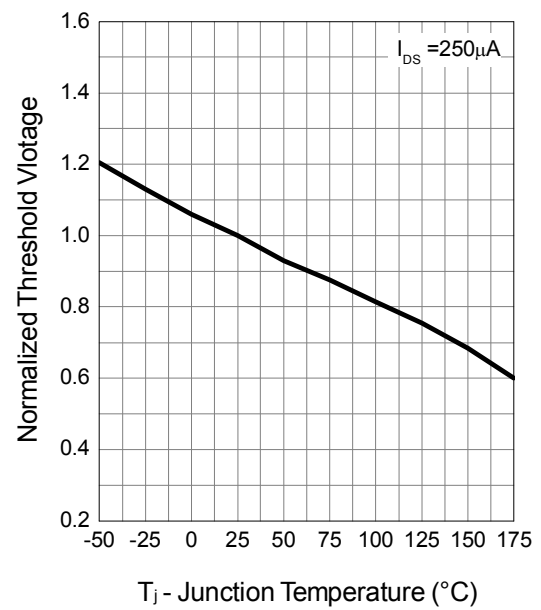


Typical Characteristics


Drain-Source On Resistance

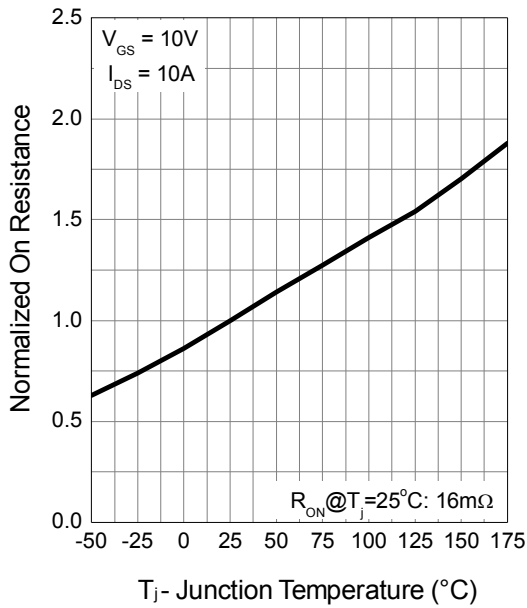


Source-Drain Diode Forward

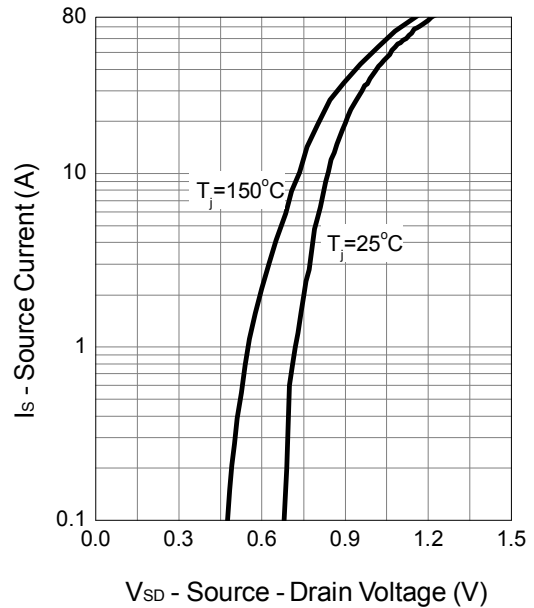

Capacitance


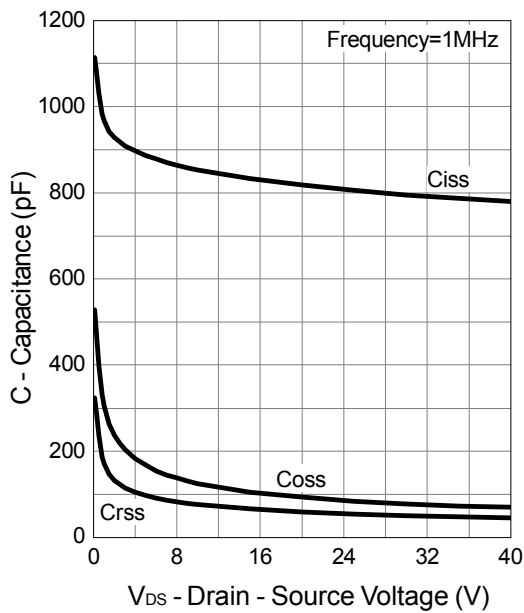


Gate Charge

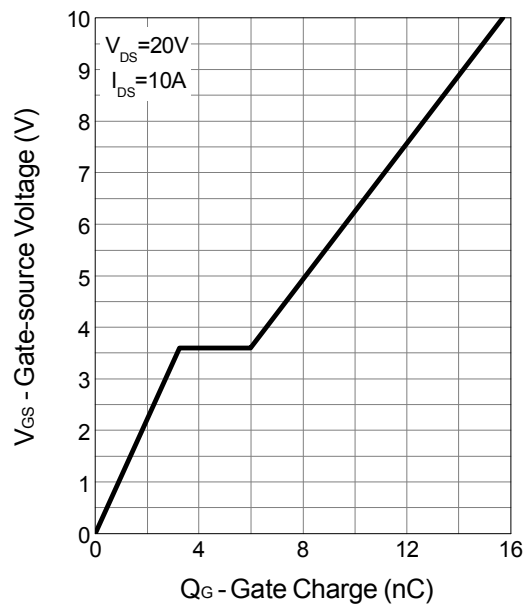



Avalanche Test Circuit and Waveforms


N Channel

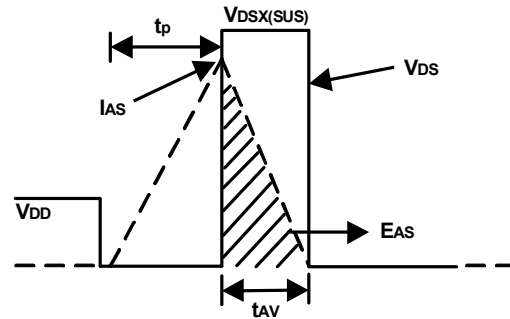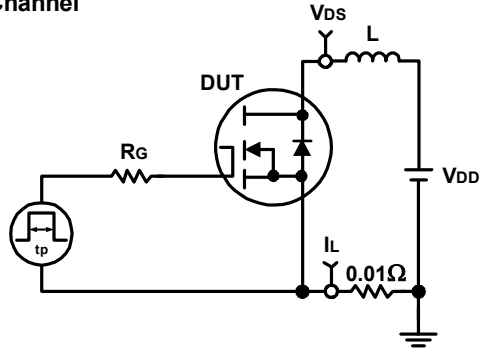

Switching Time Test Circuit and Waveforms


N Channel

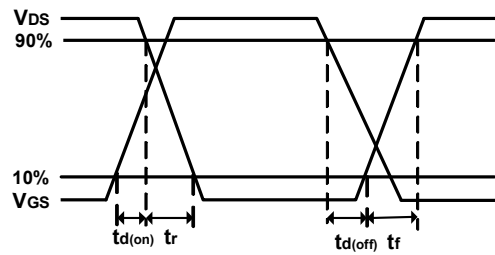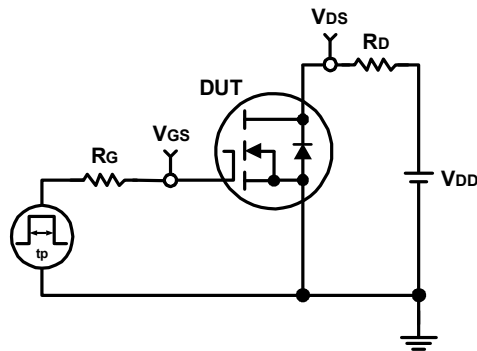

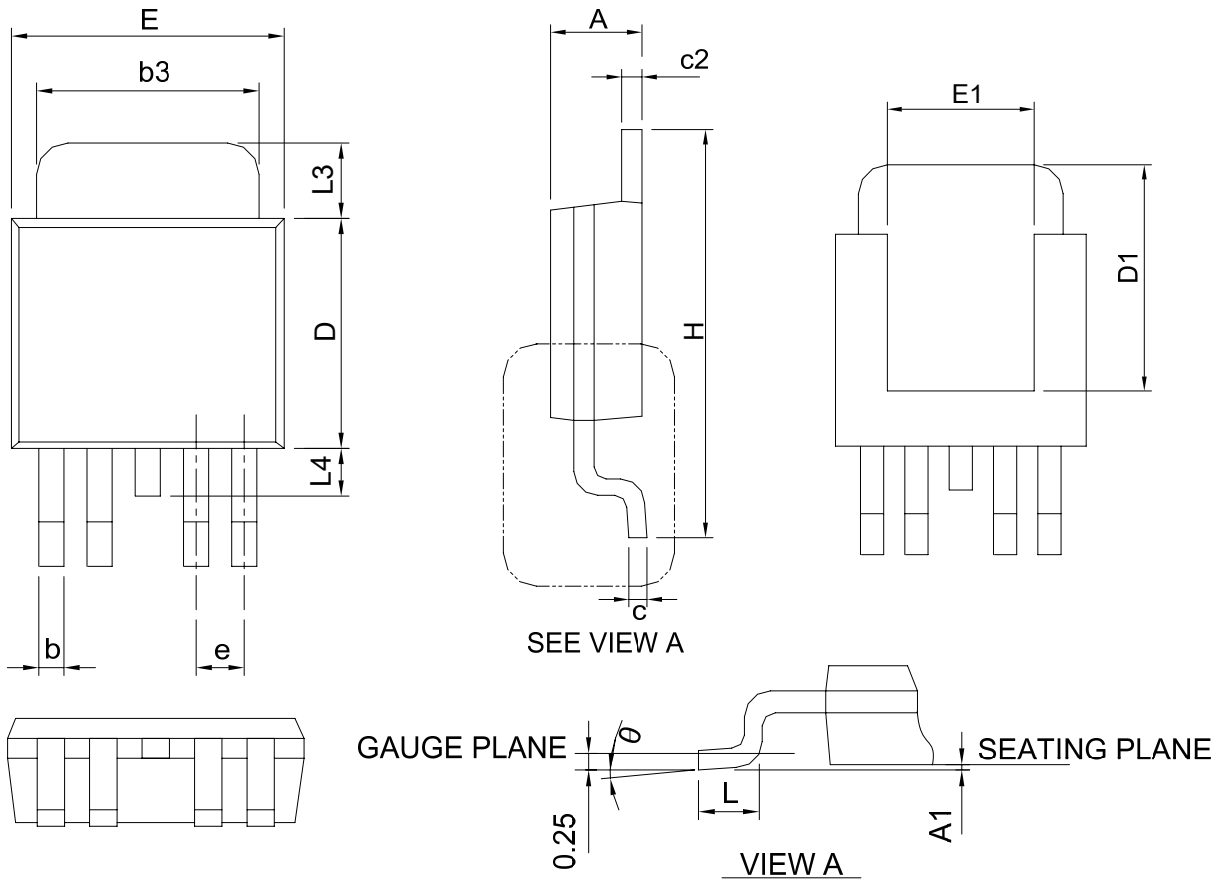

SYMBOL	TO-252-4			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	2.18	2.39	0.086	0.094
A1	-	0.2	-	0.008
b	0.50	0.71	0.020	0.028
b3	4.32	5.46	0.170	0.215
c	0.46	0.61	0.018	0.024
c2	0.46	0.89	0.018	0.035
D	5.33	6.22	0.210	0.245
D1	4.57	6.00	0.180	0.236
E	6.35	6.73	0.250	0.265
E1	3.81	6.00	0.150	0.236
e	1.30 BSC		0.051 BSC	
H	9.40	10.41	0.370	0.410
L	1.40	1.78	0.055	0.070
L3	0.89	2.03	0.035	0.080
L4	-	1.02	-	0.040
θ	0°	8°	0°	8°

RECOMMENDED LAND PATTERN

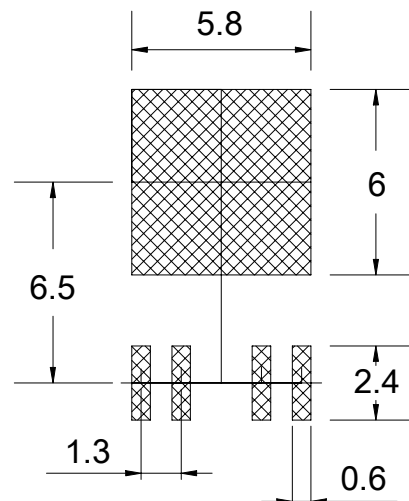

UNIT: mm

Attention

- 1, Any and all Winsok power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your Winsok power representative nearest you before using any Winsok power products described or contained herein in such applications.
- 2, Winsok power assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Winsok power products described or contained herein.
- 3, Specifications of any and all Winsok power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- 4, Winsok power Semiconductor CO., LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- 5, In the event that any or all Winsok power products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- 6, No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of Winsok power Semiconductor CO., LTD.
- 7, Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. Winsok power believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- 8, Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the Winsok power product that you intend to use.
- 9, this catalog provides information as of Sep. 2014. Specifications and information herein are subject to change without notice.

单击下面可查看定价，库存，交付和生命周期等信息

[>>WINSOK\(微硕\)](#)