



MPCS-5701 Series

LSOP6, DC Input, 0.8A Gate Driver Optocoupler

Description

The MPCS-5701 series Photocoupler is ideally suited for driving power IGBTs and MOSFETs used in motor control inverter applications and inverters in power supply system. It contains an LED optically coupled to an integrated circuit with a power output stage. The Photocoupler operational parameters are guaranteed over the temperature range from -40°C ~ $+110^{\circ}\text{C}$.


Features

- 0.8 A maximum peak output current
- Rail-to-rail output voltage
- 120 ns maximum propagation delay
- Under Voltage Lock-Out protection (UVLO) with hysteresis
- Wide operating range: 10 to 30 Volts (V_{CC})
- Guaranteed performance over temperature - 40°C ~ $+110^{\circ}\text{C}$.

Applications

- Isolated IGBT/Power MOSFET gate drive
- Industrial Inverter
- AC brushless and DC motor drives
- Induction Heating


SCHEMATIC

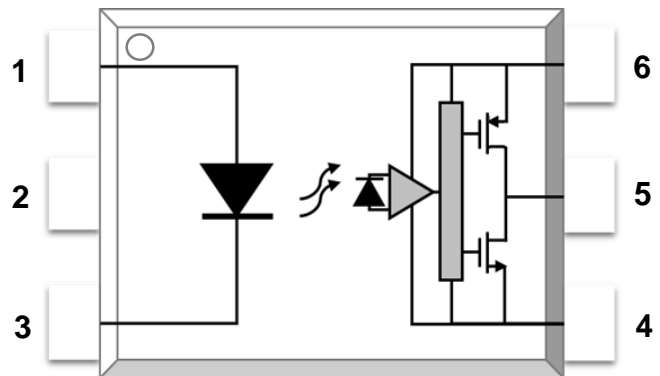

PIN DEFINITION

1. Anode	6. V_{CC}
2. NC	5. V_o
3. Cathode	4. GND

PACKAGE OUTLINE

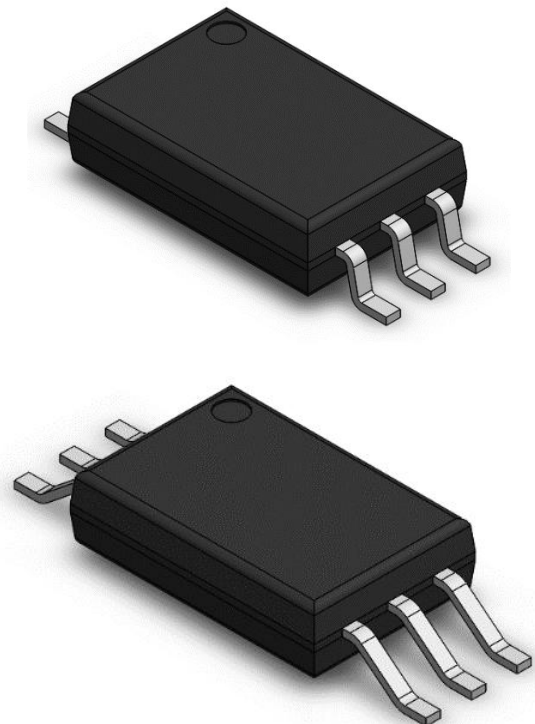

Rev: 2.1

Release Date: 2024/7/29



MPCS-5701 Series

LSOP6, DC Input, 0.8A Gate Driver Optocoupler

TRUTH TABLE

LED	V _{CC} -V _{SS} (Turn-ON, +ve going)	V _{CC} -V _{SS} (Turn-OFF, -ve going)	VO
Off	0V to 30V	0V to 30V	Low
On	0V to 6.9V	0V to 5.9V	Low
On	6.9V to 8.7V	5.9V to 7.5V	Transition
On	8.7V to 30V	7.5V to 30V	High

Note: A 0.1µF bypass capacitor must be connected between Pin 4 and 6.

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	NOTE
Storage Temperature	T _{stg}	-55	125	°C	-
Operating Temperature	T _{opr}	-40	110	°C	-
Output IC Junction Temperature	T _J	-	125	°C	-
Total Output Supply Voltage	(V _{CC} - V _{SS})	0	35	V	-
Average Forward Input Current	I _F	-	20	mA	-
Reverse Input Voltage	V _R	-	5	V	-
“High” Peak Output Current	I _{OH(PEAK)}	-	0.8	A	1
“Low” Peak Output Current	I _{OL(PEAK)}	-	0.8	A	1
Output Voltage	V _{O(PEAK)}	-0.5	V _{CC}	V	-
Power Dissipation	P _I	-	45	mW	-
Output IC Power Dissipation	P _O	-	250	mW	-
Lead Solder Temperature	T _{sol}	-	260	°C	-

Note: Ambient temperature = 25°C, unless otherwise specified. Stresses exceeding the absolute maximum ratings can cause permanent damage to the device. Exposure to absolute maximum ratings for long periods of time can adversely affect reliability.

Note 1: Exponential waveform. Pulse width ≤ 10 µs, f ≤ 15 kHz

RECOMMENDED OPERATION CONDITIONS

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Operating Temperature	T _A	-40	110	°C
Supply Voltage	V _{CC}	10	30	V
Input Current (ON)	I _{F(ON)}	6	16	mA
Input Voltage (OFF)	V _{F(OFF)}	0	0.8	V



MPCS-5701 Series

LSOP6, DC Input, 0.8A Gate Driver Optocoupler

ELECTRICAL OPTICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
INPUT CHARACTERISTICS							
Forward Voltage	V_F	1.6	1.9	2.4	V	$I_F = 10 \text{ mA}$	-
Input Forward Voltage Temperature Coefficient	$\Delta V_F / \Delta T$	-	-1.237	-	mV/°C	$I_F = 10 \text{ mA}$	-
Input Reverse Voltage	BV_R	5	-	-	V	$I_R = 10 \mu\text{A}$	-
Input Threshold Current (Low to High)	I_{FLH}	-	1.0	5	mA	$V_O > 5 \text{ V}, I_O = 0 \text{ A}$	-
Input Threshold Voltage (High to Low)	V_{FHL}	0.8	-	-	V	$V_{CC} = 30 \text{ V}, V_O < 5 \text{ V}$	-
Input Capacitance	C_{IN}	-	60	-	pF	$V_F = 0, f = 1 \text{ MHz}$	-
OUTPUT CHARACTERISTICS							
High Level Supply Current	I_{CCH}	-	2	3	mA	$I_F = 10 \text{ mA}, V_{CC} = 30 \text{ V}, V_O = \text{Open}$	-
Low Level Supply Current	I_{CCL}	-	2.6	3.5	mA	$I_F = 0 \text{ mA}, V_{CC} = 30 \text{ V}, V_O = \text{Open}$	-
High Level Output Voltage	V_{OH}	$V_{CC} - 1.0 \text{ V}$	$V_{CC} - 0.4 \text{ V}$	-	V	$I_F = 10 \text{ mA}, I_O = -100 \text{ mA}$	2,3
Low Level Output Voltage	V_{OL}	-	0.25	1	V	$I_F = 0 \text{ mA}, I_O = 100 \text{ mA}$	-
High Level Output Current	I_{OH}	-	-	-0.8	A	$I_F = 10 \text{ mA}, V_{CC} = 30 \text{ V}, V_O = V_{CC} - 6$	1
Low Level Output Current	I_{OL}	0.8	-	-	A	$I_F = 0 \text{ mA}, V_{CC} = 30 \text{ V}, V_O = V_{SS} + 6$	1
Under Voltage Lockout Threshold	V_{UVLO+}	6.9	7.9	8.7	V	$V_O > 5 \text{ V}, I_F = 10 \text{ mA}$	-
	V_{UVLO-}	5.9	6.8	7.5	V	$V_O < 5 \text{ V}, I_F = 10 \text{ mA}$	-

Note: All Typical values at $T_A = 25^\circ\text{C}$ and $V_{CC} - V_{SS} = 30 \text{ V}$, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1: Maximum pulse width = 10 μs .

Note 2: In this test V_{OH} is measured with a dc load current. When driving capacitive loads, V_{OH} will approach V_{CC} as I_{OH} approaches zero amps.

Note 3: Maximum pulse width = 1 ms.



MPCS-5701 Series

LSOP6, DC Input, 0.8A Gate Driver Optocoupler

SWITCHING SPECIFICATION

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
SWITCHING CHARACTERISTICS							
Propagation Delay Time to Output Low Level	t_{PHL}	-	60	120	ns	$R_g = 47 \Omega$, $C_g = 3 \text{ nF}$, $f = 10 \text{ kHz}$, Duty Cycle = 50% $I_F = 10 \text{ mA}$, $V_{CC} = 30 \text{ V}$	-
Propagation Delay Time to Output High Level	t_{PLH}	-	55	120	ns		-
Pulse Width Distortion	P_{WD}	-	5	80	ns		-
Propagation Delay Difference Between Any Two Parts	P_{DD} ($t_{PHL} - t_{PLH}$)	-100	-	+100	ns		-
Rise Time	t_r	-	6	-	ns		-
Fall Time	t_f	-	5	-	ns		-
Common Mode Transient Immunity at Logic High	CM_H	10	35	-	kV/ μ s	$I_F = 7 \text{ to } 16 \text{ mA}$ $V_{CC} = 30 \text{ V}$, $T_A = 25 \text{ }^\circ\text{C}$, $V_{CM} = 1 \text{ kV}$	1,2
Common Mode Transient Immunity at Logic Low	CM_L	10	35	-	kV/ μ s	$I_F = 0 \text{ mA}$ $V_{CC} = 30 \text{ V}$, $T_A = 25 \text{ }^\circ\text{C}$, $V_{CM} = 1 \text{ kV}$	1,3

Note: All Typical values at $T_A = 25^\circ\text{C}$ and $V_{CC} - V_{SS} = 30 \text{ V}$, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1: Pin 2 needs to be connected to LED common.

Note 2: Common mode transient immunity in the high state is the maximum tolerable dV_{CM}/dt of the common mode pulse, V_{CM} , to assure that the output will remain in the high state (meaning $V_O > 10.0\text{V}$).

Note 3: Common mode transient immunity in a low state is the maximum tolerable dV_{CM}/dt of the common mode pulse, V_{CM} , to assure that the output will remain in a low state (meaning $V_O < 1.0\text{V}$).



MPCS-5701 Series

LSOP6, DC Input, 0.8A Gate Driver Optocoupler

ISOLATION CHARACTERISTIC

Parameter	Symbol	Device	Min.	Typ.	Max.	Unit	Test Condition	Note
Withstand Insulation Test Voltage	V _{iso}	MPCS-5701P	5000	-	-	V	RH ≤ 40%-60%, t = 1min, T _A = 25 °C	1,2
		MPCS-5701W						
Input-Output Resistance	R _{I-O}	-	-	10 ¹²	-	Ω	V _{I-O} = 500V DC	1

Note: All Typical values at T_A = 25°C and V_{CC} – V_{SS} = 30 V, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1: Device is considered a two terminal device: pins 1, 2, 3 are shorted together and pins 4, 5, 6 are shorted together.

Note 2: According to UL1577, each photocoupler is tested by applying an insulation test voltage 6000VRMS for one second.



MPCS-5701 Series

LSOP6, DC Input, 0.8A Gate Driver Optocoupler

TYPICAL PERFORMANCE CURVES & TEST CIRCUITS

Fig.1 High output rail voltage vs. Temperature

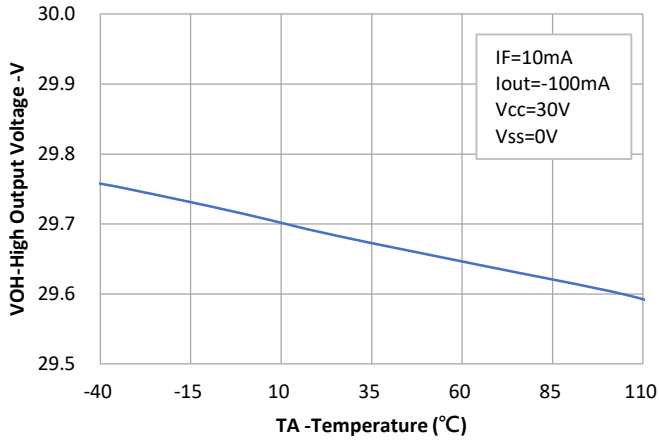


Fig.2 V_{OH} vs. Temperature

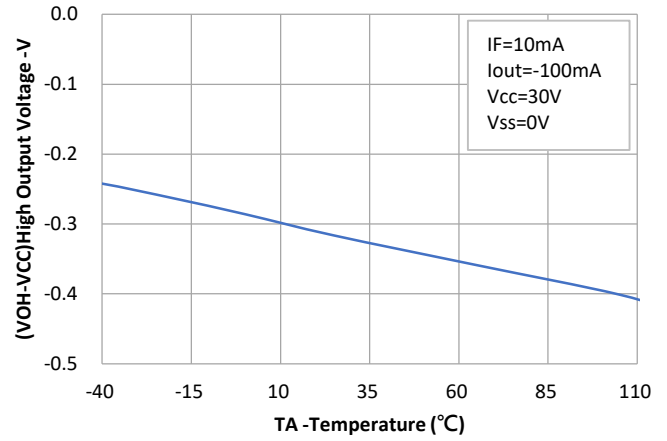


Fig.3 V_{OL} vs. Temperature

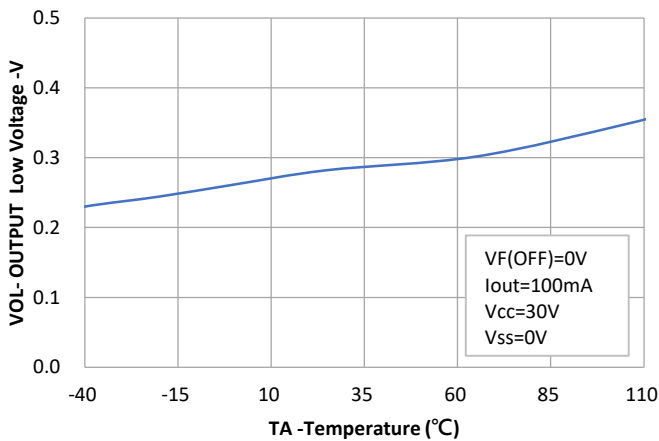


Fig.4 I_{CC} vs. Temperature

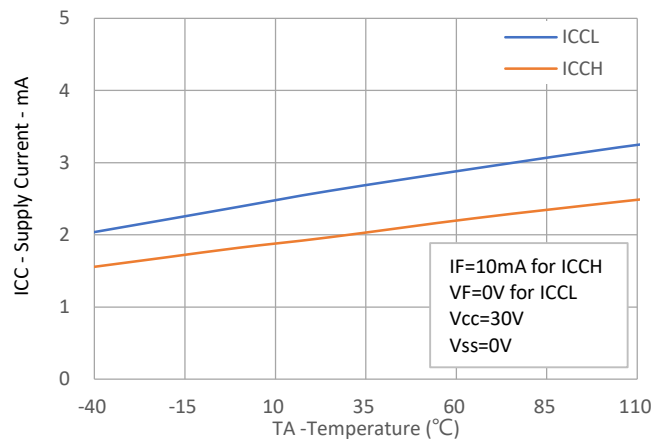


Fig.5 I_{CC} vs. V_{CC}


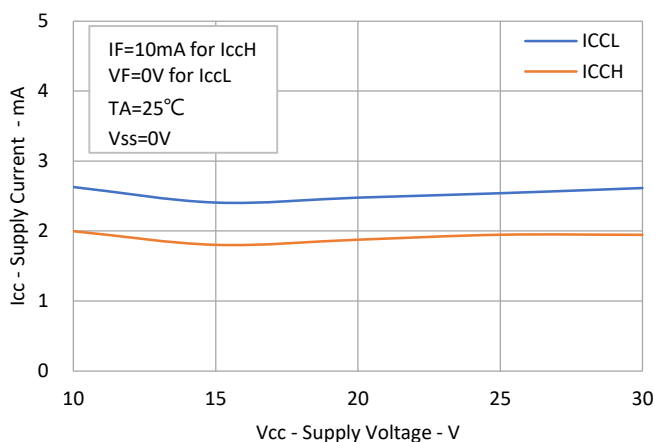


Fig.6 I_{FLH} vs. Hysteresis



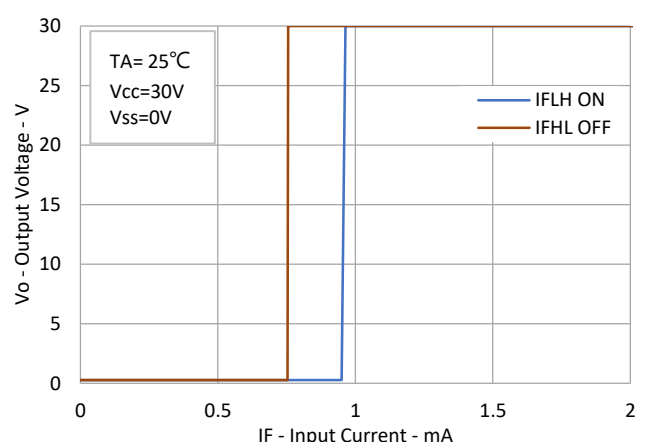

MPCS-5701 Series

LSOP6, DC Input, 0.8A Gate Driver Optocoupler

Fig.7 I_{FH} vs. Temperature

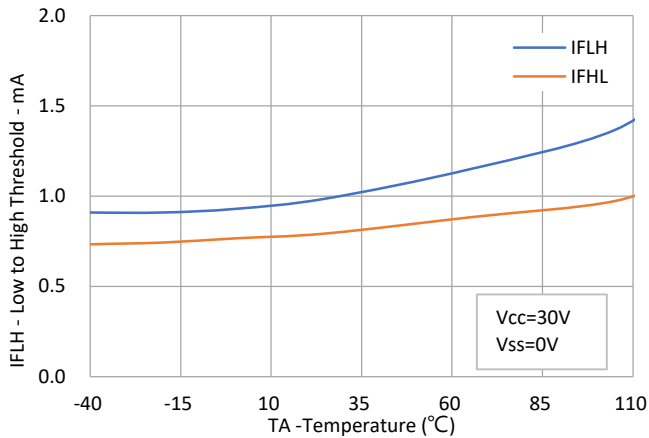


Fig.8 Propagation Delays vs. V_{CC}

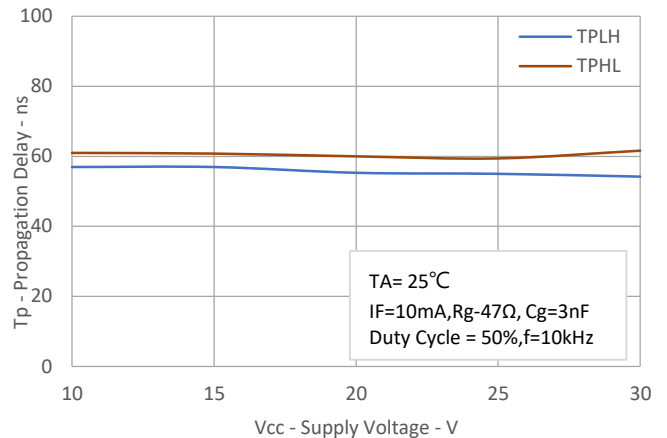


Fig.9 Propagation Delays vs. I_F

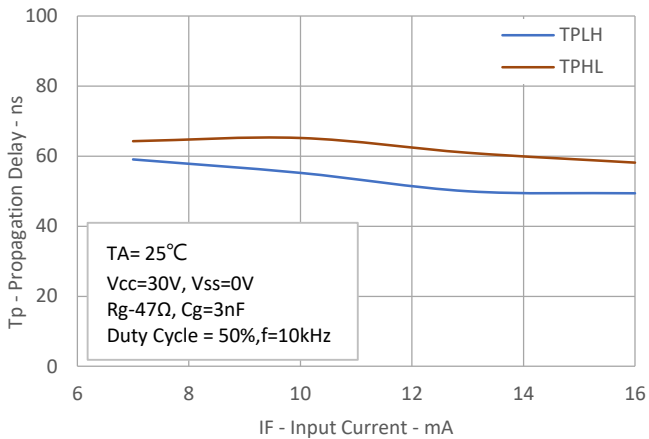


Fig.10 Propagation Delays vs. Temperature

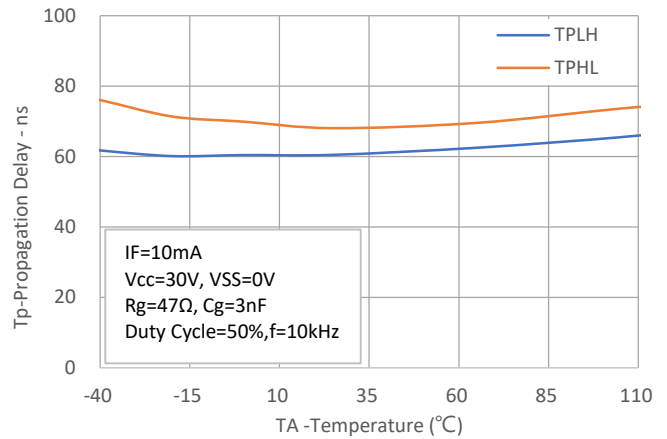


Fig.11 Propagation Delays vs. R_g

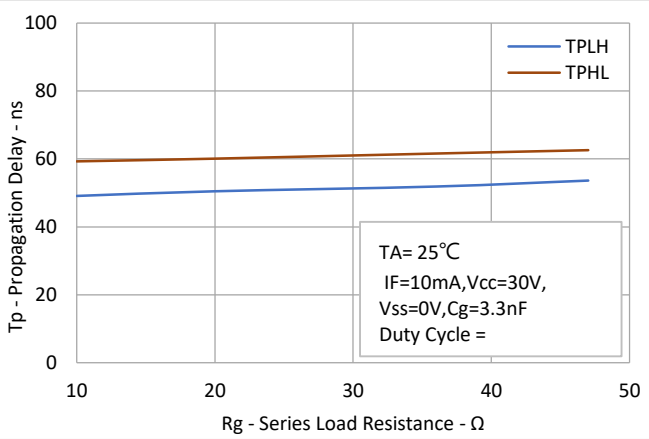


Fig.12 Propagation Delays vs. C_g

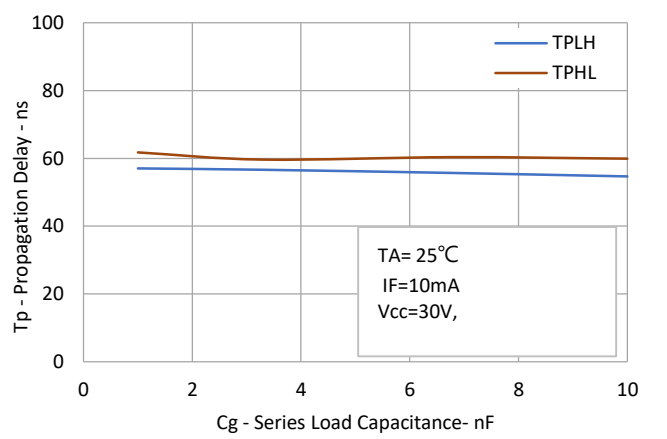


Fig.13 Input Current vs. Forward Voltage

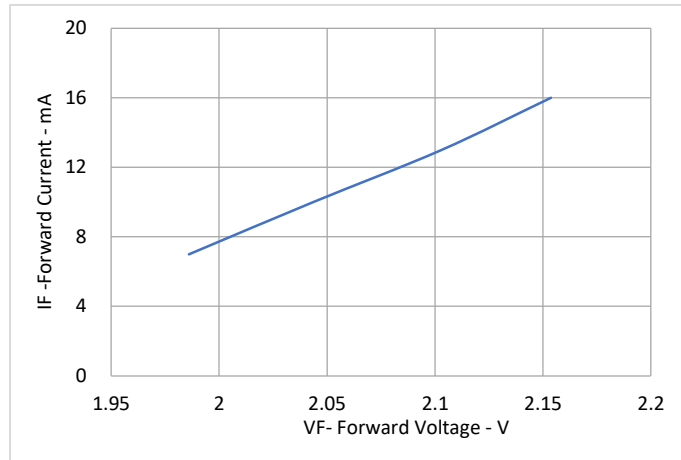


Fig.14 I_{OH} Test Circuit

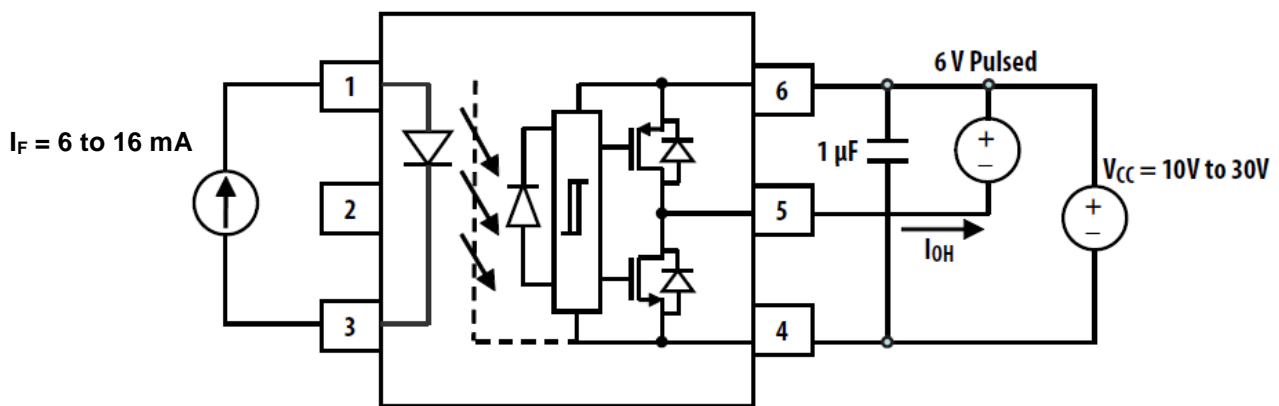


Fig.15 I_{OL} Test Circuit

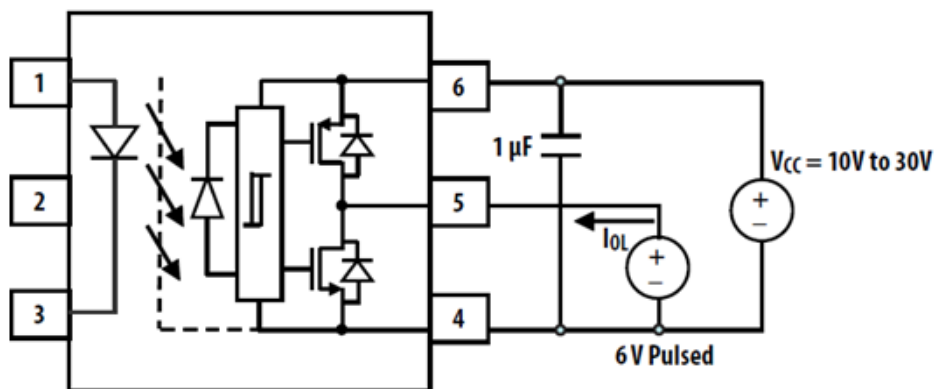


Fig.16 V_{OH} Test Circuit

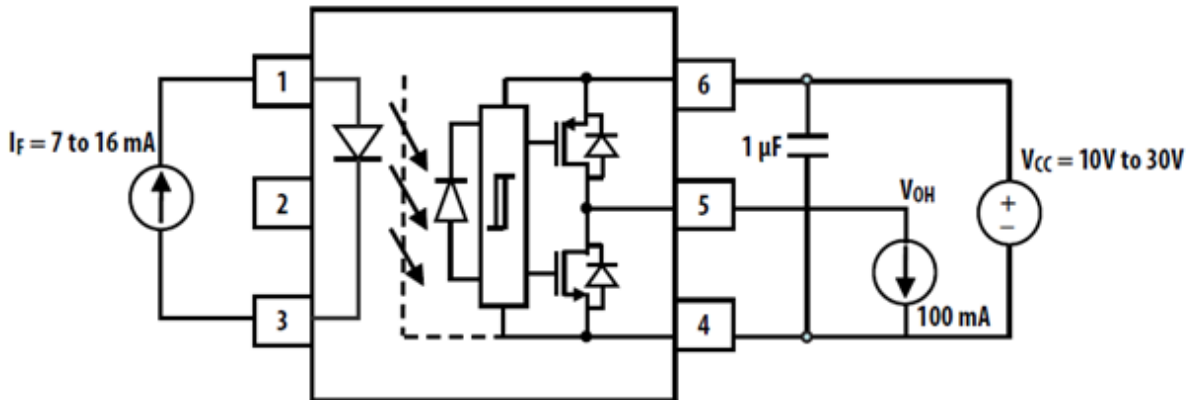


Fig.17 V_{OL} Test Circuit

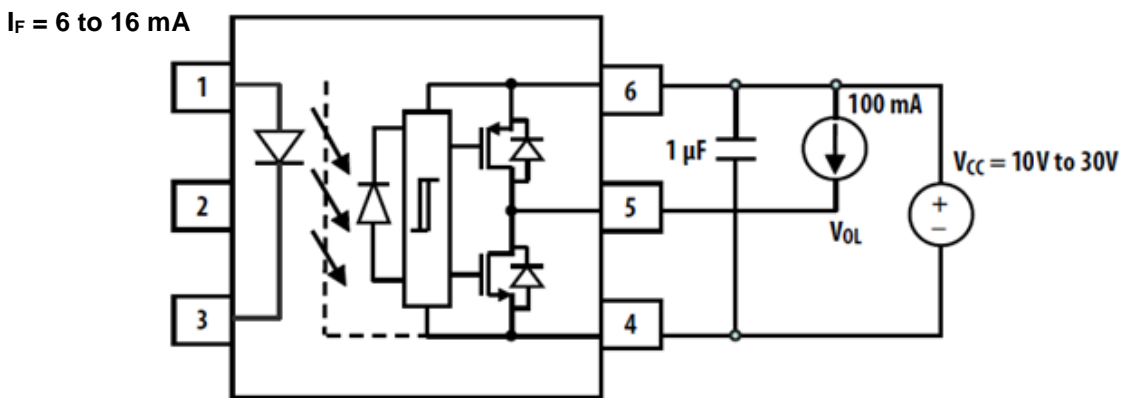


Fig.18 I_{FLH} Test Circuit

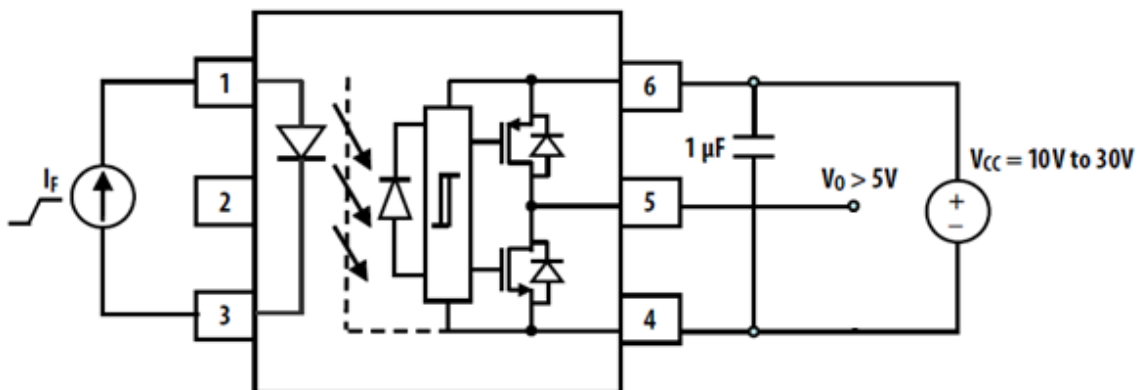


Fig.19 V_{VLO} Test Circuit

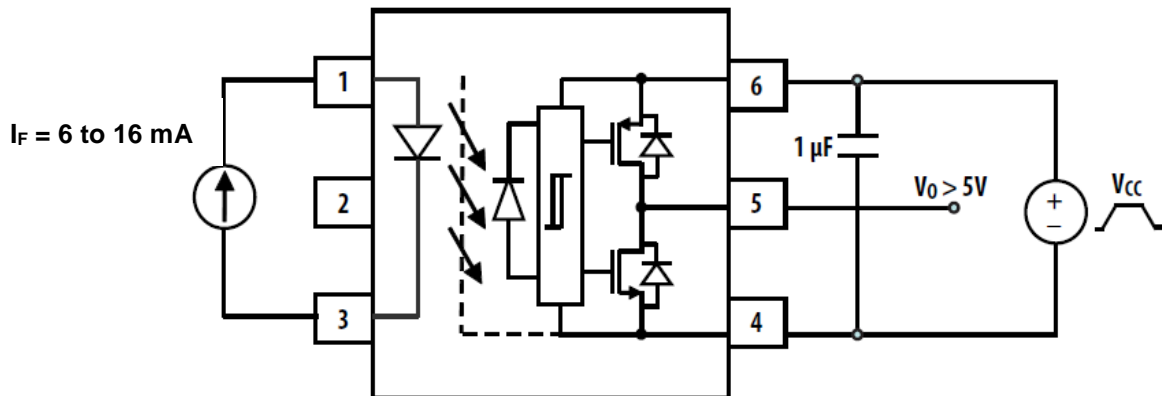


Fig.20 t_{PHL} , t_{PLH} , t_r and t_f Test Circuit and Waveforms


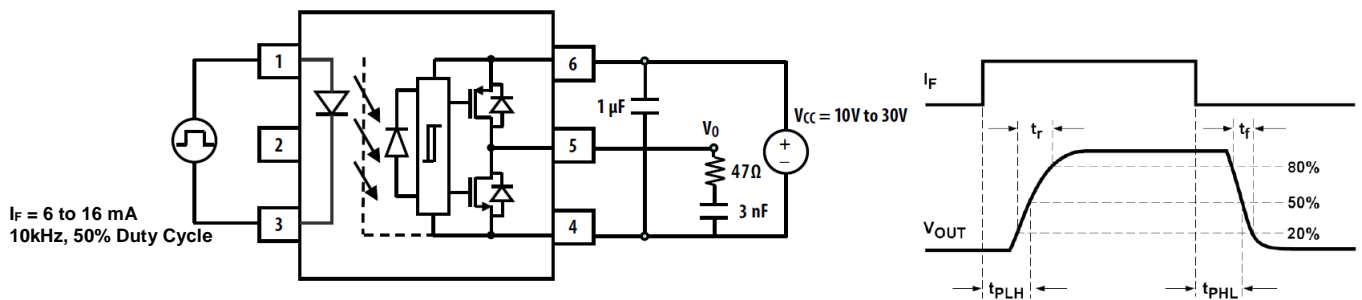


Fig.21 CMR Test Circuit with Split Resistors Network and Waveforms



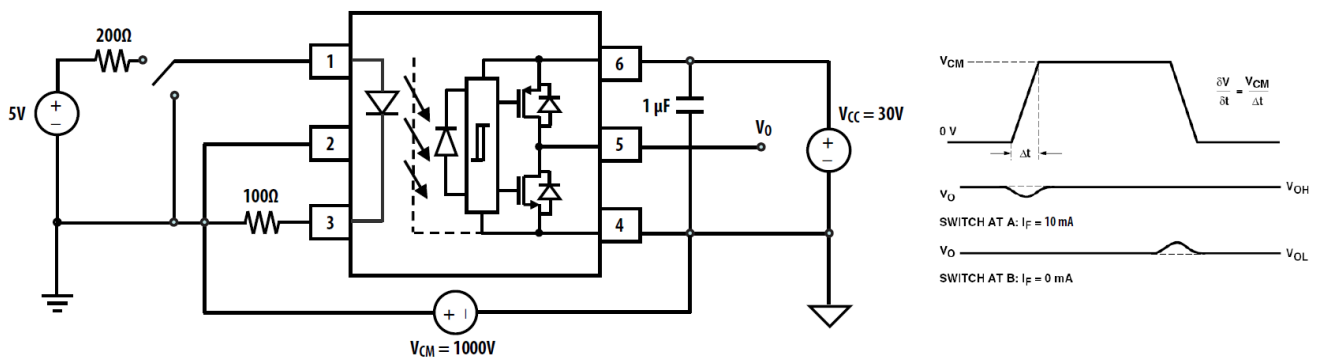


MPCS-5701 Series

LSOP6, DC Input, 0.8A Gate Driver Optocoupler


PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming (P Type)

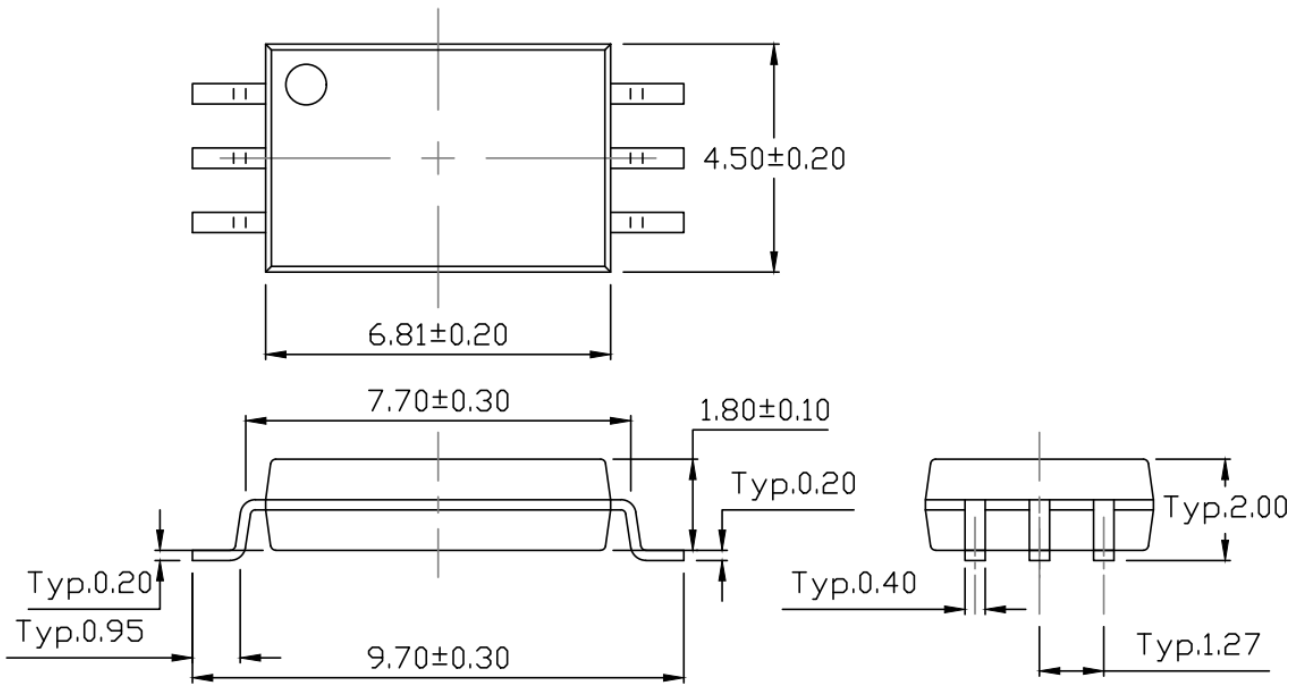

General Tolerance: ± 0.25 mm

Surface Mount (Gullwing) Lead Forming (W Type)

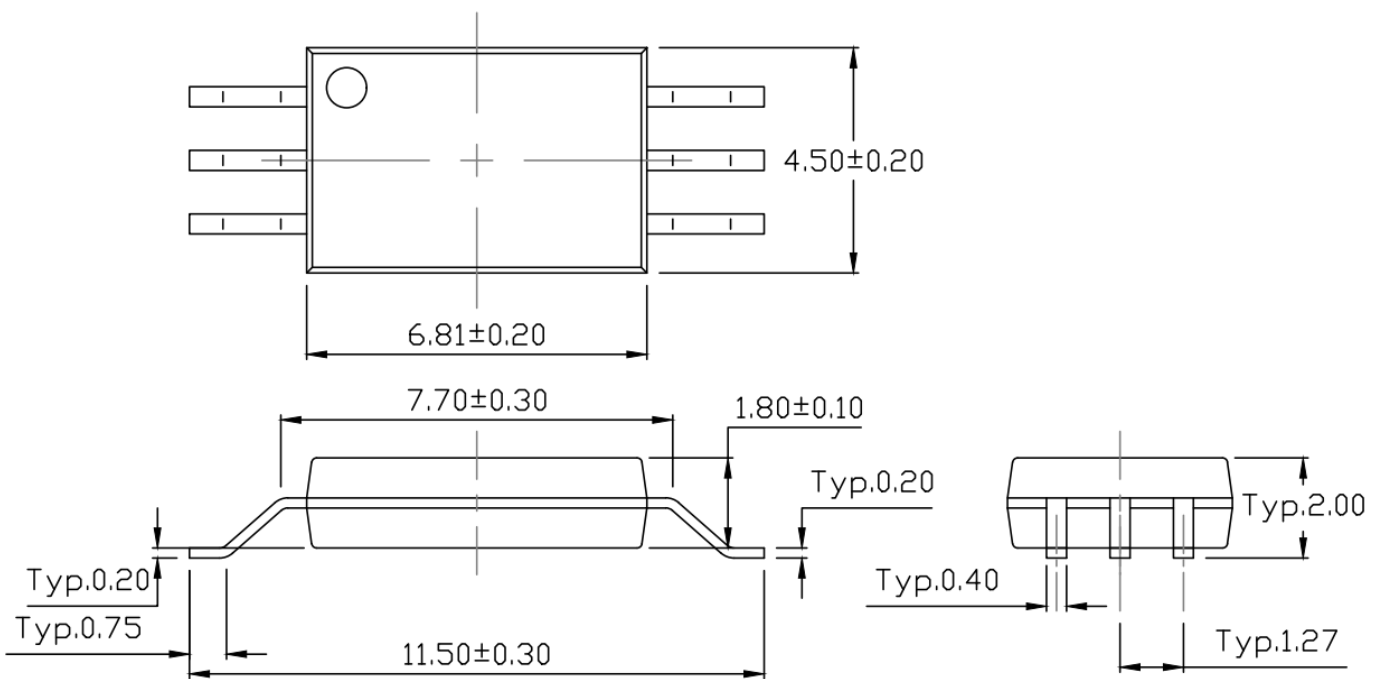

General Tolerance: ± 0.25 mm




MPCS-5701 Series


LSOP6, DC Input, 0.8A Gate Driver Optocoupler

RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming (P Type)

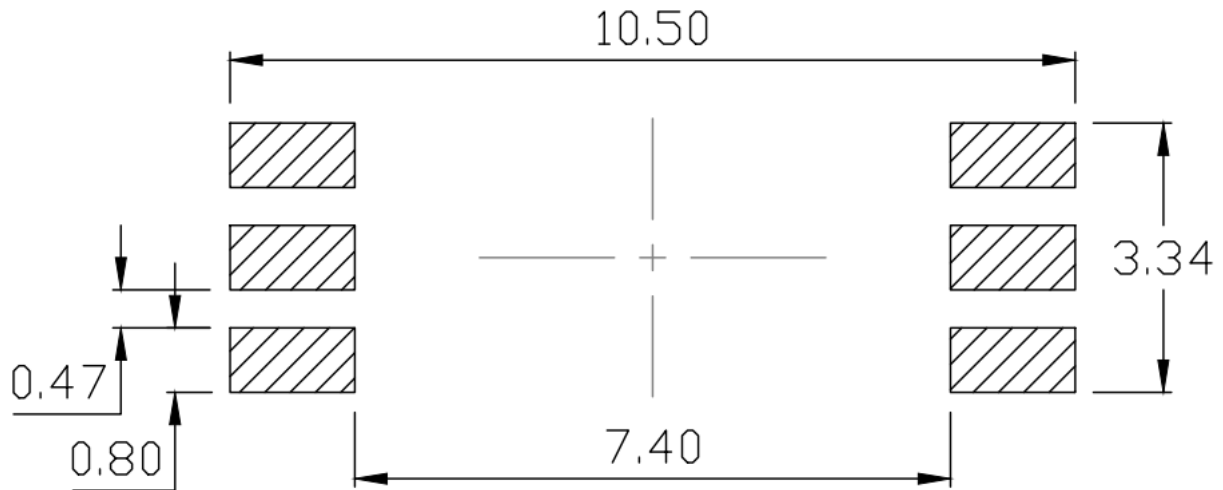

Surface Mount (Gullwing) Lead Forming (W Type)

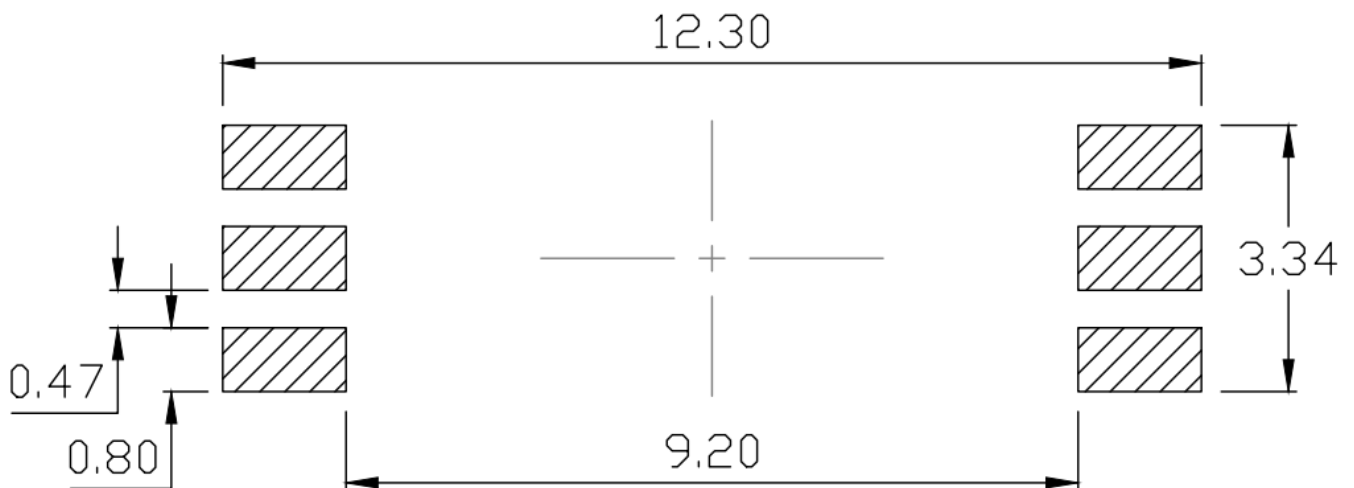




MPCS-5701 Series


LSOP6, DC Input, 0.8A Gate Driver Optocoupler

CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming (P Type) Option T1

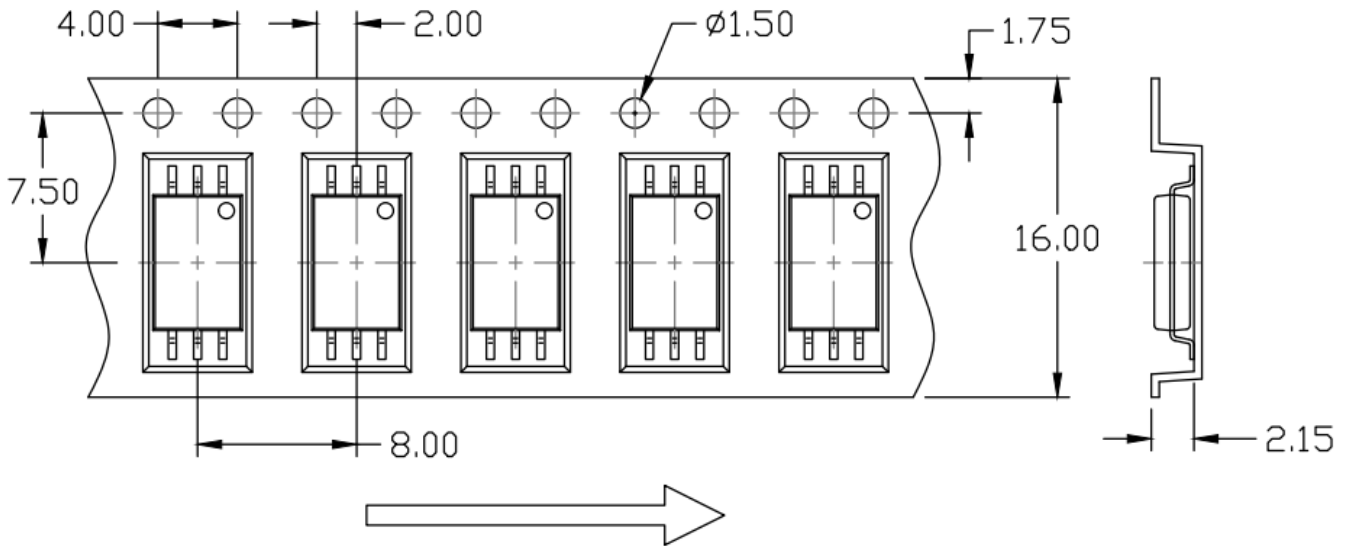

Surface Mount Lead Forming (P Type) Option T2

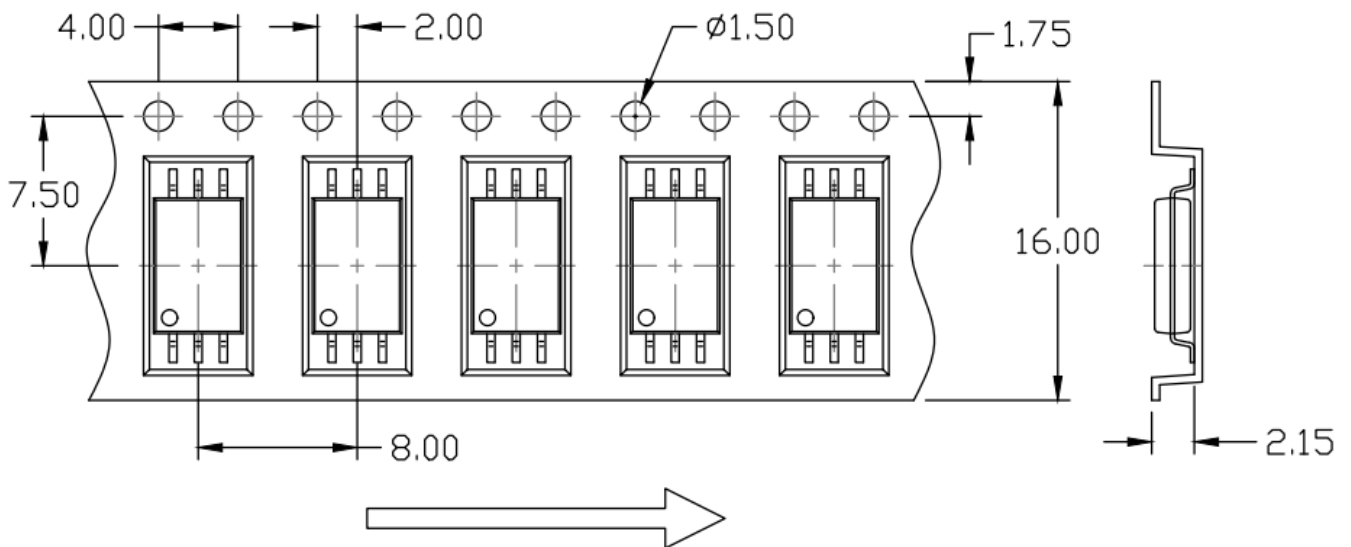

Rev: 2.1

Release Date: 2024/7/29




MPCS-5701 Series


LSOP6, DC Input, 0.8A Gate Driver Optocoupler

CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Surface Mount (Gullwing) Lead Forming (W Type) Option T1

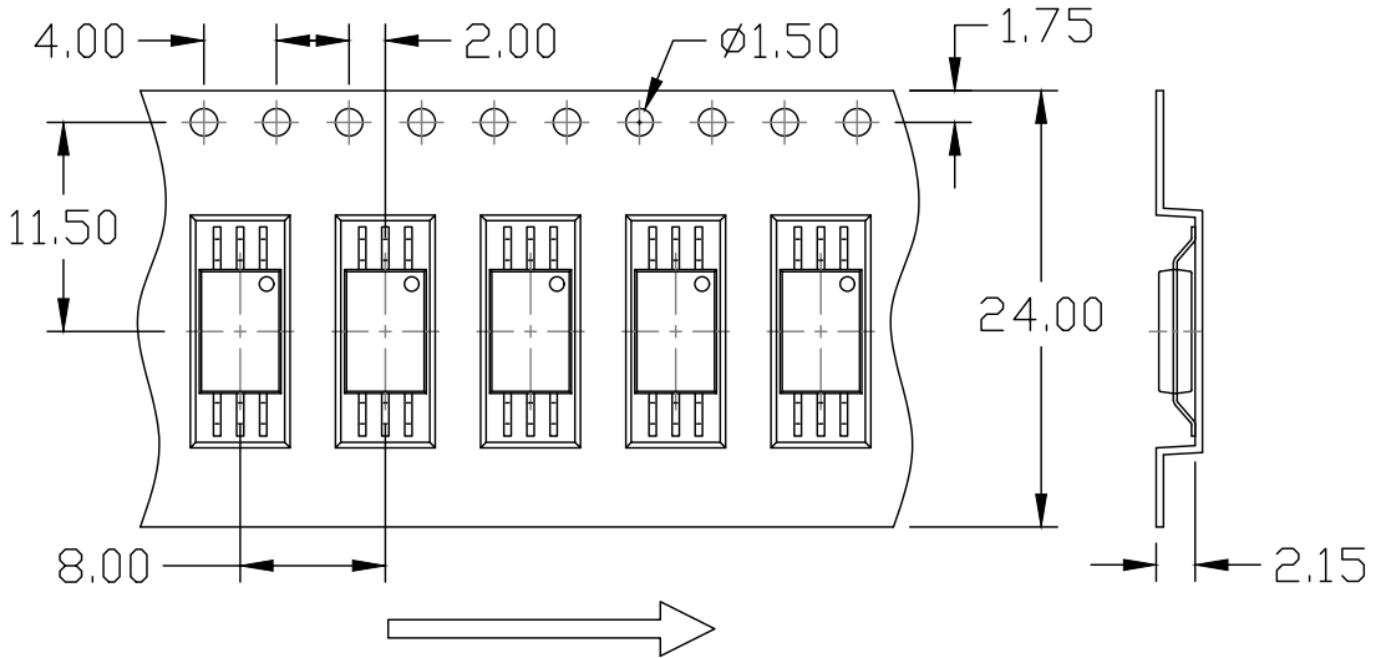

Surface Mount (Gullwing) Lead Forming (W Type) Option T2

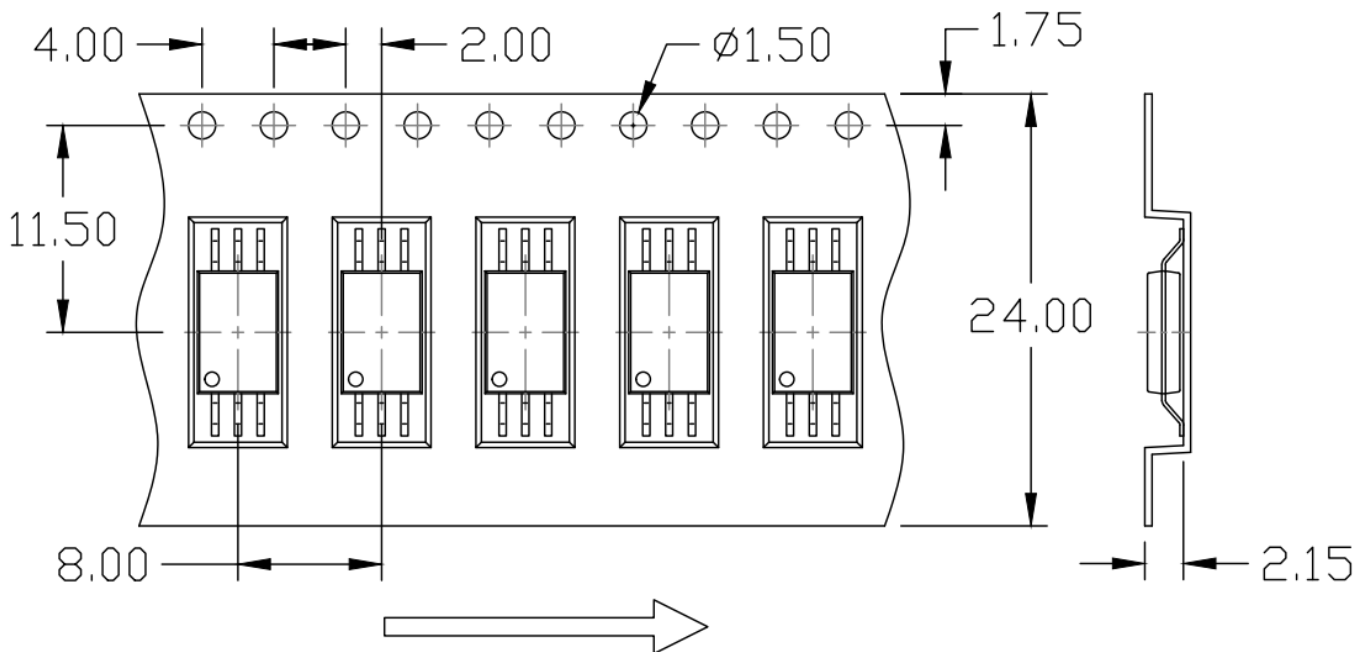


Rev: 2.1


Release Date: 2024/7/29

REEL SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming (P Type)

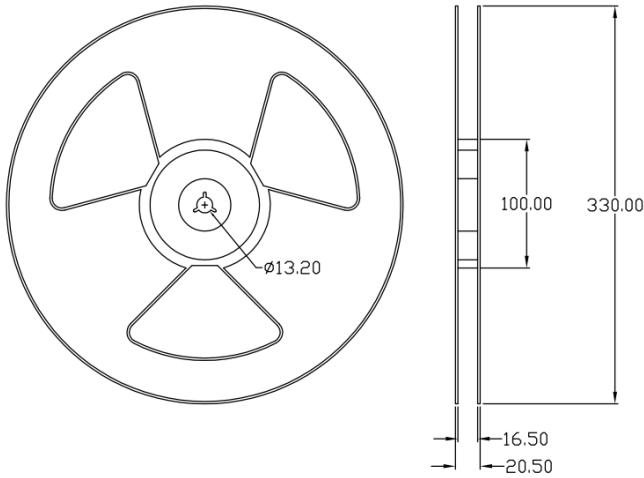


Surface Mount (Gullwing) Lead Forming (W Type)

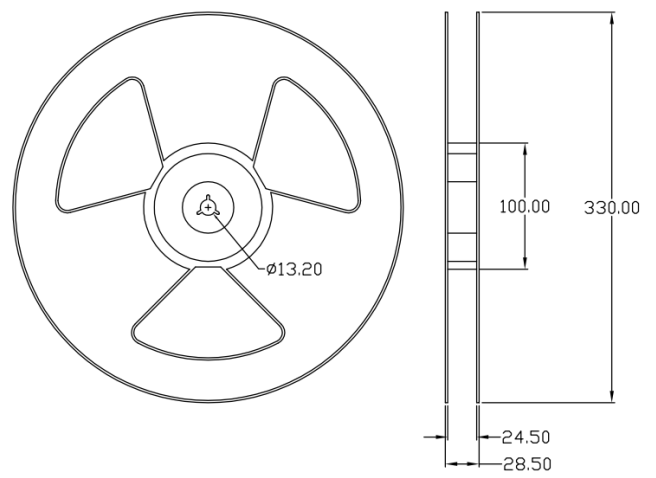


BOX SPECIFICATIONS (Reel Type)

INNER BOX

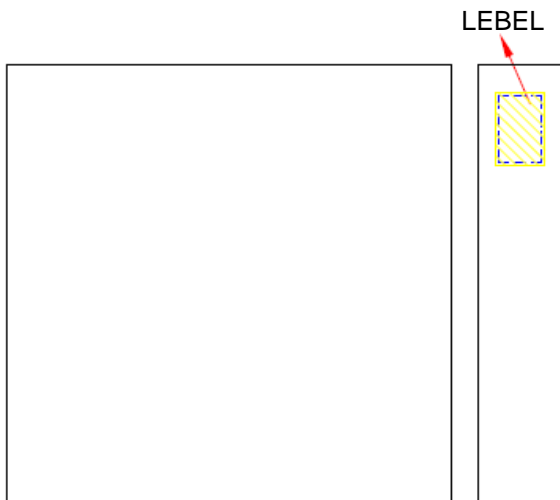

L x W x H = 36cm x 36cm x 6.9cm

OUTER BOX

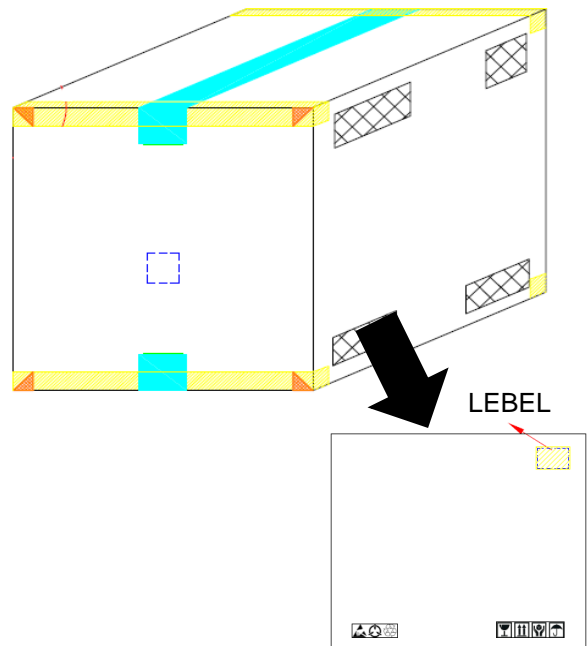

L x W x H = 45cm x 38cm x 38cm



MPCS-5701 Series

LSOP6, DC Input, 0.8A Gate Driver Optocoupler

ORDERING AND MARKING INFORMATION

MARKING INFORMATION



M : Company Abbr.
 YY : Year date code
 WW : 2-digit work week
 5701 : Part Number
 T or H : Factory identification mark
 V : VDE Identification(Option)

ORDERING INFORMATION

MPCS-5701(P/W)-ZV

MPC – Company Abbr.
 S – Stack
 5701 – Part Number
 P/W – Lead Form Option
 (P-9mm Clearance or W-11mm Clearance)
 Z – Tape and Reel Option (T1/T2)
 V –VDE Option (V or None)

LABEL INFORMATION

MEMCHIP 喆光照明光電股份有限公司
 WISELITE Optronics Co., Ltd

Part No : XXXXXXXXXXXXXXXX Bin Code : X

Lot No : XXXXXXXXXXXX

Date Code : XXXX


Q'ty : XXXX pcs

PACKING QUANTITY

Option	Quantity	Quantity – Inner box	Quantity – Outer box
Option P T1/T2	3000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 45k Units
Option W T1/T2	3000 Units/Reel	2 Reels/Inner box	5 Inner box/Outer box = 30k Units

REFLOW INFORMATION

REFLOW PROFILE

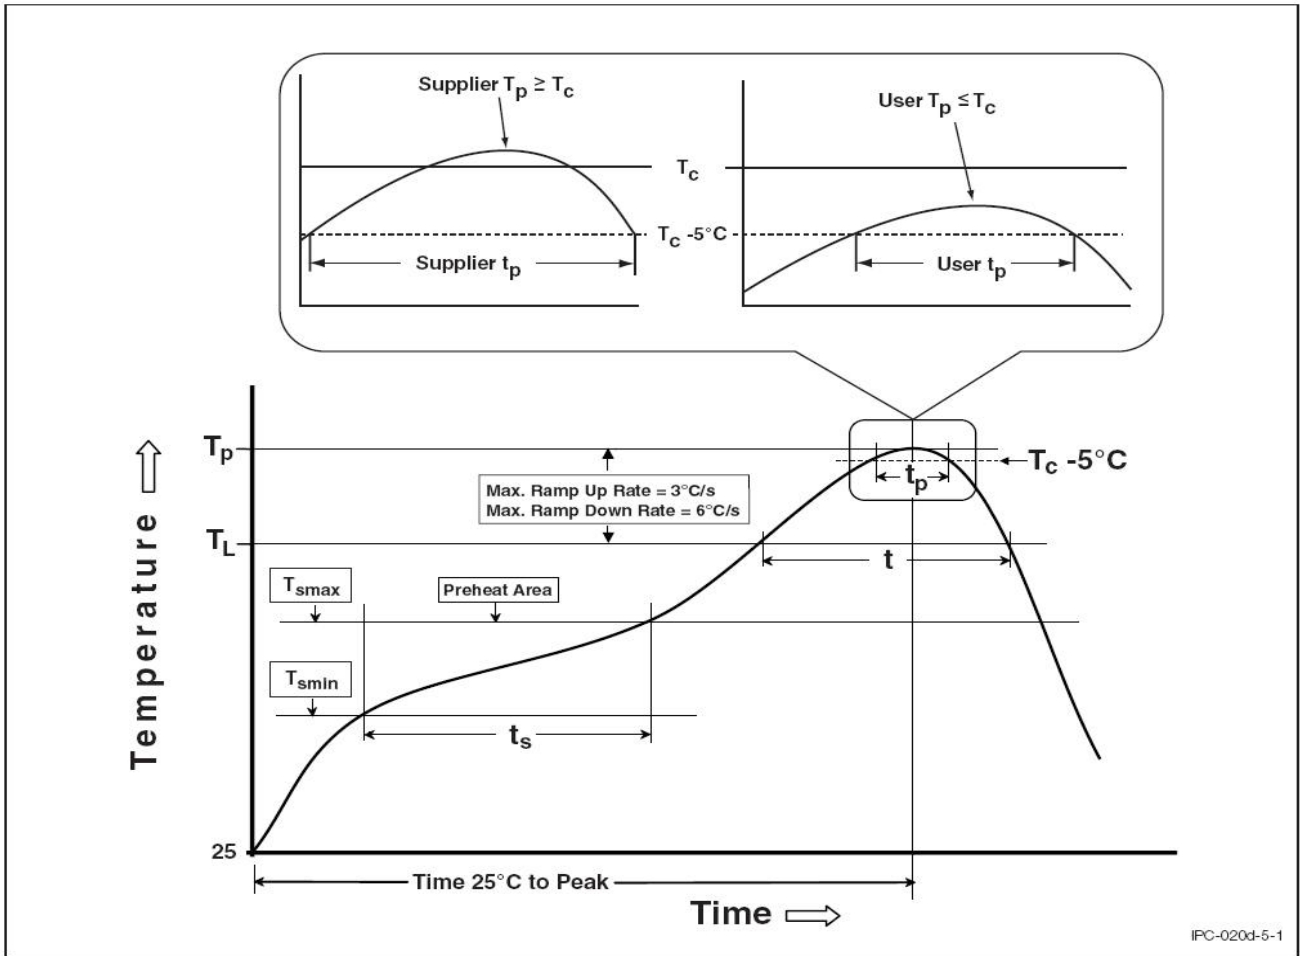

IPC-020d-5-1

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (T_{smin})	100°C	150°C
Temperature Max. (T_{smax})	150°C	200°C
Time (t_s) from (T_{smin} to T_{smax})	60-120 seconds	60-120 seconds
Ramp-up Rate (t_L to t_P)	3°C/second max.	3°C/second max.
Liquidous Temperature (T_L)	183°C	217°C
Time (t_L) Maintained Above (T_L)	60 – 150 seconds	60 – 150 seconds
Peak Body Package Temperature	235°C +0°C / -5°C	260°C +0°C / -5°C
Time (t_P) within 5°C of 260°C	20 seconds	30 seconds
Ramp-down Rate (T_P to T_L)	6°C/second max	6°C/second max
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.




MPCS-5701 Series

LSOP6, DC Input, 0.8A Gate Driver Optocoupler

TEMPERATURE PROFILE OF SOLDERING

WAVE SOLDERING (JESD22-A111 COMPLIANT)

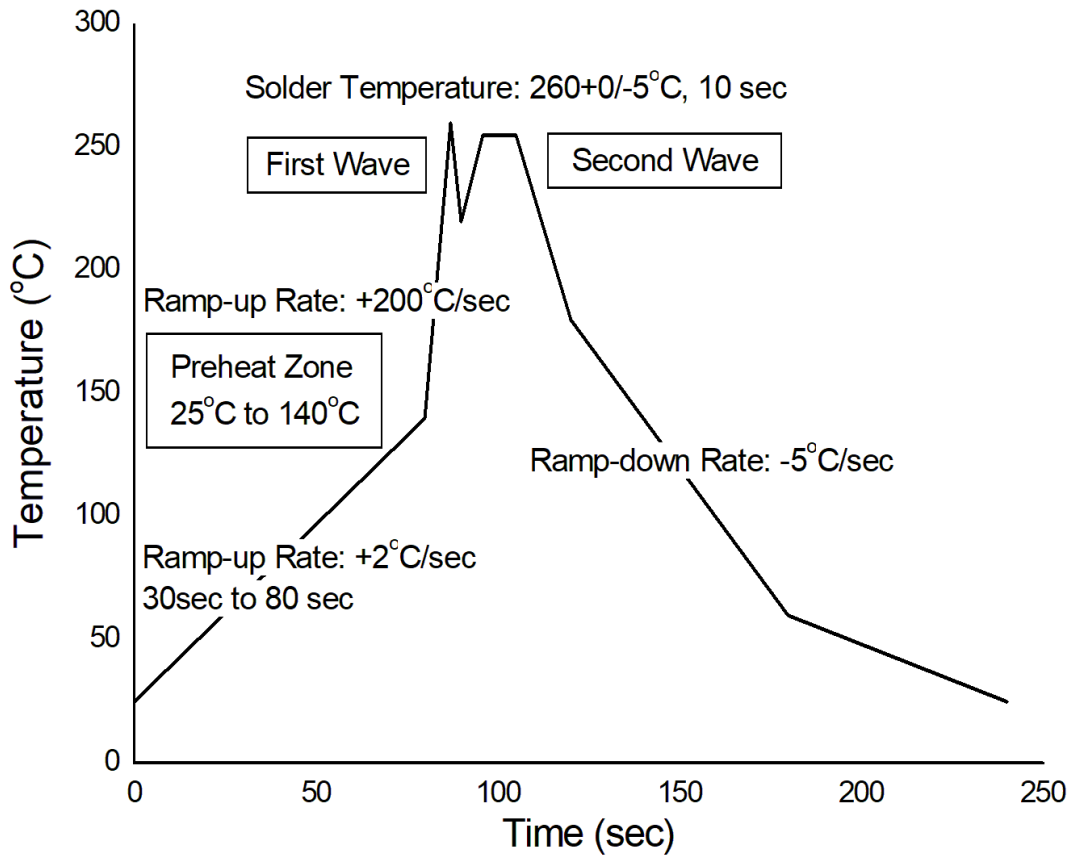

HAND SOLDERING BY SOLDERING IRON

Soldering Temperature	380±0/-5°C
-----------------------	------------

Soldering Time	3 sec max.
----------------	------------

One time soldering is recommended for all soldering method.

Do not solder more than three times for IR reflow soldering.



DISCLAIMER

- WISELITE is continually improving the quality, reliability, function and design. WISELITE reserves the right to make changes without further notices.
- The characteristic curves shown in this datasheet are representing typical performance which are not guaranteed.
- WISELITE makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, WISELITE disclaims (a) any and all liability arising out of the application or use of any product, (b) any and all liability, including without limitation special, consequential or incidental damages, and (c) any and all implied warranties, including warranties of fitness for particular.
- The products shown in this publication are designed for the general use in electronic applications such as office automation, equipment, communications devices, audio/visual equipment, electrical application and instrumentation purpose, non-infringement and merchantability.
- This product is not intended to be used for military, aircraft, medical, life sustaining or lifesaving applications or any other application which can result in human injury or death.
- Please contact WISELITE sales agent for special application request.
- Immerge unit's body in solder paste is not recommended.
- Parameters provided in datasheets may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated in each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify WISELITE's terms and conditions of purchase, including but not limited to the warranty expressed therein.
- Discoloration might be occurred on the package surface after soldering, reflow or long-time use. It neither impacts the performance nor reliability.

单击下面可查看定价，库存，交付和生命周期等信息

[>>WISELITE\(蓝光\)](#)