


Technical Data  
 Pin(outer sleeve):Brass,machined CuZn38Pb2  
 Clip(Contact 6 Finger):Beryllium copper,heat treated  
 Insulator:PPS UL94V-0 colour:black  
 Current rating:3Amps  
 Mating pin Ø:0.635/0.889mm  
 Forces:(polished steel gauge)Ø0.66mm)  
 -Insertion:1.2N typ  
 -Withdrawal:0.6N typ  
 Mechanical life:min 500cycles  
 Contact resistance:max 10mΩ  
 Dielectric strength:min 1000V RMS  
 Operating temperature:-40°C to+105°C  
 Soldering temperature:+255°C

**X5511 F V-XX-C70 D30-1000**

- ①
- ②
- ③
- ④
- ⑤
- ⑥
- ⑦

- ① Series.No.
- ② Category : F-Female
- ③ Welding Board Angle : V-Straight 180°
- ④ Row No-Pin No:XX-01P-XXP
- ⑤ Plastic Height :C=7.0mm
- ⑥ Pin Length :D=3.0mm
- ⑦ 1000:TYPE 1000

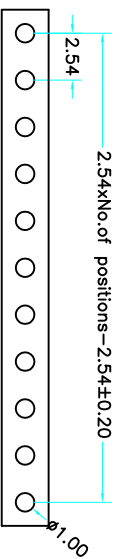

Recommended P.C.B  
 Layout ( $\pm 0.05$ )

PART NO	X5511FV-XX-C70D30-1000	Material	PPS 94V-0	Material(Terminal)	Brass	Finish(Terminal)	Tin Gold 1u"	Mates With XKB Pin Header
---------	------------------------	----------	-----------	--------------------	-------	------------------	-----------------	---------------------------

ΔX	ΔX	ΔX	MARK	DESCRIPTION	REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	ANGULAR	±5°	DSND	SCALE: N/A	MODEL TYPE:
										L ≤ 4	±0.2	DWN	VIEW:	PART NO.:
										4 < L ≤ 16	±0.3	CHKD	UNIT: mm	DWG NO.:
										16 < L ≤ 63	±0.4	APPD	SIZE: A4	X5511FV-XX-C70D30-1000
										L > 63	±0.5			XKB INDUSTRIAL PRECISION CO.,LIMITED
														WEIGHT
														1.0g
														SHEET
														1/1
														REVISION
														A0

单击下面可查看定价，库存，交付和生命周期等信息

[>>XKB Connectivity\(中国星坤\)](#)